

[PM02H2635139] 199638 - DAY TANK

Component Diesel Fuel

Fluid {not provided} (--- GAL)

RECOMMENDATION

All laboratory tests indicate that this sample meets specifications for No.2 low-sulfur diesel fuel.

CORROSION

All metal levels are normal indicating no corrosion in the system.

CONTAMINANTS


FUEL CONDITION

The water content is negligible. There is no bacteria or fungus (yeast and/or mold) indicated in the sample. There is no indication of any contamination in the fuel.


Sulfur value derived by ASTM D5453 method for ULSD validation.


Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0029142		
Sample Date		Client Info		08 Feb 2024		
Machine Age	hrs	Client Info		1019		
Sample Status				NORMAL		
Aluminum	ppm	ASTM D5185m	<0.1	0		
Nickel	ppm	ASTM D5185m	<0.1	0		
Lead	ppm	ASTM D5185m	<0.1	0		
Vanadium	ppm	ASTM D5185m	<0.1	0		
Iron	ppm	ASTM D5185m	<0.1	<1		
Silicon	ppm	ASTM D5185m	<1.0	0		
Sodium	ppm	ASTM D5185m	<0.1	0		
Potassium	ppm	ASTM D5185m	<0.1	0		
Water	%	ASTM D6304	< 0.05	0.003		
ppm Water	ppm	ASTM D6304	<500	39		
% Gasoline	%	*In-House	<0.50	0.0		
% Biodiesel	%	*In-House	<20.0	0.0		
Calcium	ppm	ASTM D5185m	<0.1	0		
Magnesium	ppm	ASTM D5185m	<0.1	0		
Phosphorus	ppm	ASTM D5185m	<0.1	0		
Zinc	ppm	ASTM D5185m	<0.1	0		
ASTM Color	scalar	*ASTM D1500		L5.5		
Visc @ 40°C	cSt	ASTM D445		2.36		
Sulfur	ppm	ASTM D5185m		16		
Sulfur (UVF)	ppm	ASTM D5453		18		

NORMAL **CORROSION** CONTAMINANTS NORMAL **FUEL CONDITION** NORMAL

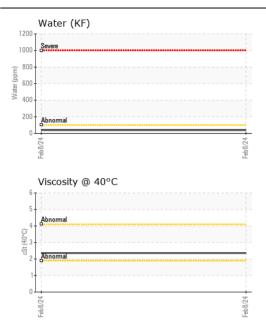

Pensky-Martens Flash Point (°C)

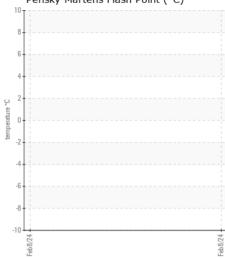

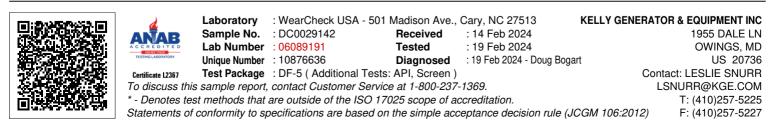

Contact/Location: LESLIE SNURR - KELOWI

Page 2 of 2