



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**323**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0719749</b>	WC0719768	---
Sample Date		Client Info		<b>09 Feb 2024</b>	08 Jun 2023	---
Machine Age	mls	Client Info		<b>84408</b>	79472	---
Oil Age	mls	Client Info		<b>0</b>	0	---
Filter Age	mls	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	ABNORMAL	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>45</b>	▲ 252	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	4	---
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>5</b>	19	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>330	<b>3</b>	6	---
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>5</b>	13	---
Potassium	ppm	ASTM D5185m	>20	<b>7</b>	36	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.7</b>	1.8	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.7</b>	19.1	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>25.0</b>	42.2	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<b>&lt;1</b>	11	---
Boron	ppm	ASTM D5185m	250	<b>3</b>	31	---
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	100	<b>4</b>	3	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	3	---
Magnesium	ppm	ASTM D5185m	450	<b>30</b>	91	---
Calcium	ppm	ASTM D5185m	3000	<b>2039</b>	2020	---
Phosphorus	ppm	ASTM D5185m	1150	<b>751</b>	828	---
Zinc	ppm	ASTM D5185m	1350	<b>1012</b>	1087	---
Sulfur	ppm	ASTM D5185m	4250	<b>3285</b>	3625	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>21.1</b>	51.8	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>4.8</b>	▲ 2.0	---
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.4</b>	12.5	---

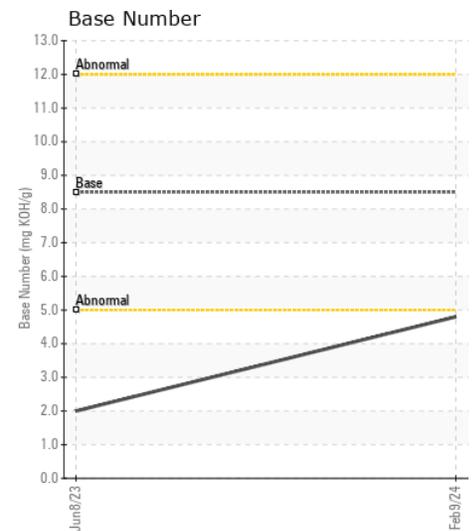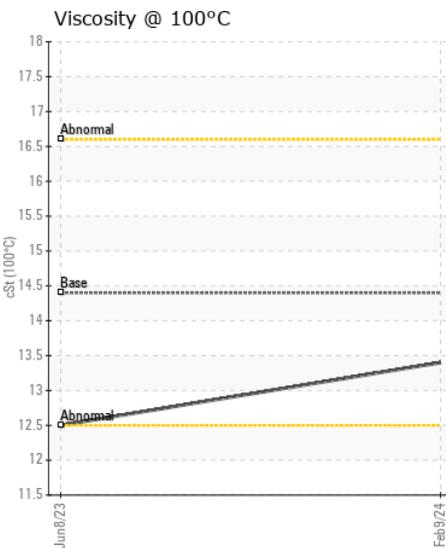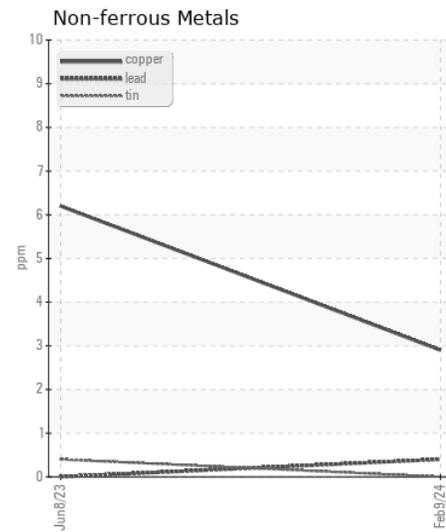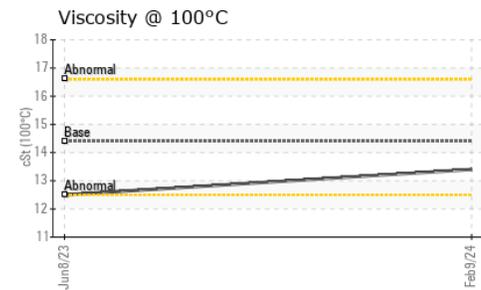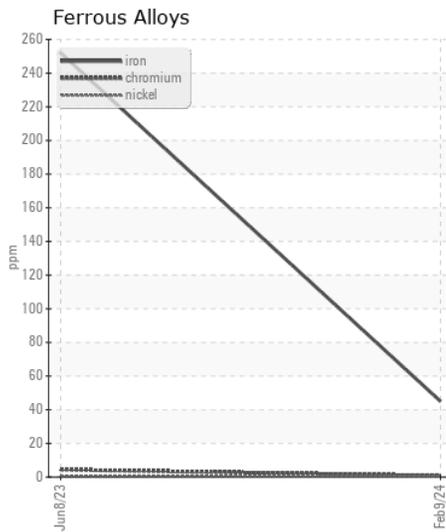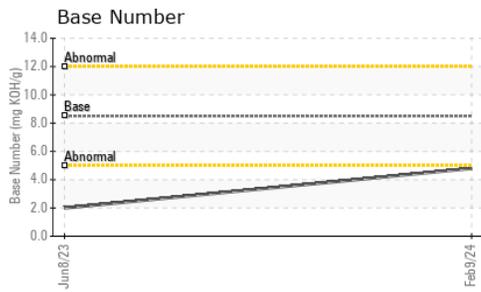

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0719749  
**Lab Number** : 06089257  
**Unique Number** : 10876702  
**Test Package** : FLEET

**Received** : 14 Feb 2024  
**Tested** : 15 Feb 2024  
**Diagnosed** : 16 Feb 2024 - Jonathan Hester

**ALMSTEAD TREE & SHRUB CARE CO**  
 58 BEECHWOOD AVE  
 NEW ROCHELLE, NY  
 US 10801  
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: