



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Machine Id

21

Component

Diesel Engine

Fluid

AMSOIL (ASL) SYN MOTOR OIL 5W30 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0632531	---	---
Sample Date		Client Info		23 Sep 2023	---	---
Machine Age	mls	Client Info		56669	---	---
Oil Age	mls	Client Info		5100	---	---
Filter Age	mls	Client Info		5100	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ATTENTION	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	4	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	2	---	---
Lead	ppm	ASTM D5185m	>40	0	---	---
Copper	ppm	ASTM D5185m	>330	1	---	---
Tin	ppm	ASTM D5185m	>15	1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	9	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0	---	---
Nitration	Abs/cm	*ASTM D7624	>20	11.5	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.0	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m		▲ 40	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		▲ 72	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		▲ 952	---	---
Calcium	ppm	ASTM D5185m		▲ 1106	---	---
Phosphorus	ppm	ASTM D5185m		▲ 670	---	---
Zinc	ppm	ASTM D5185m		▲ 811	---	---
Sulfur	ppm	ASTM D5185m		▲ 2844	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.1	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	12.2	6.0	---	---
Visc @ 100°C	cSt	ASTM D445	10.7	10.4	---	---

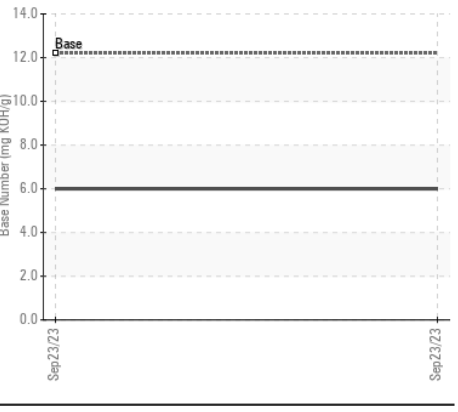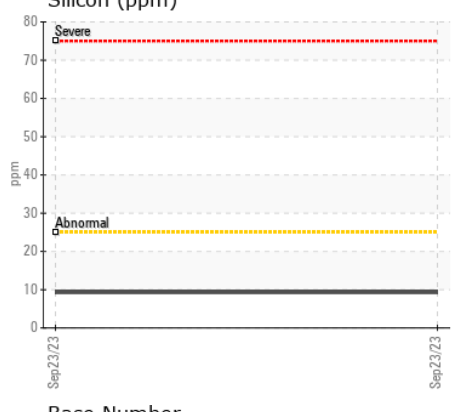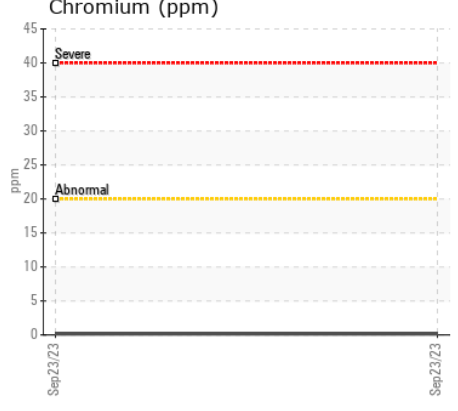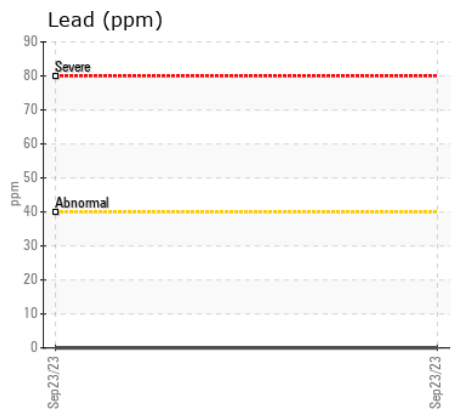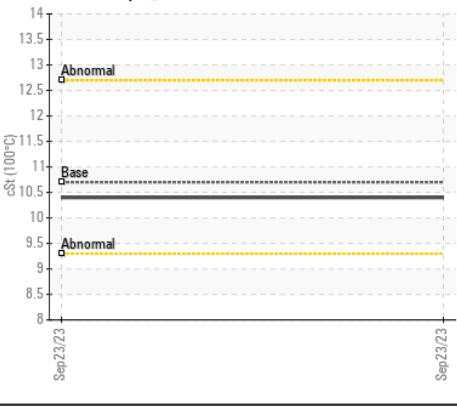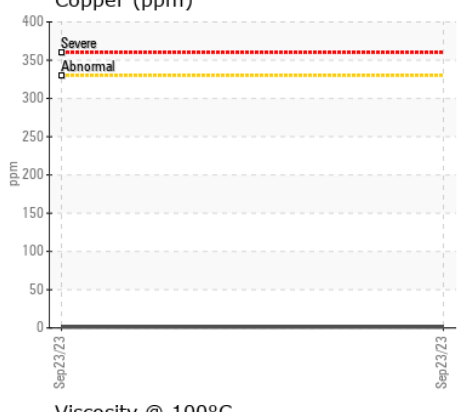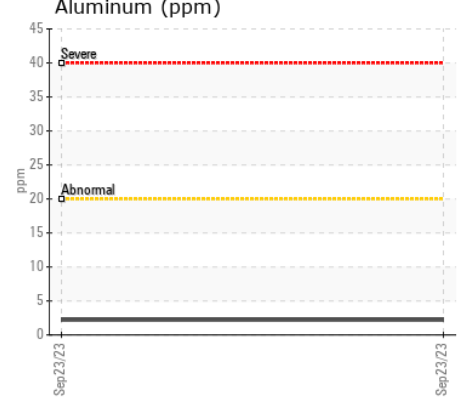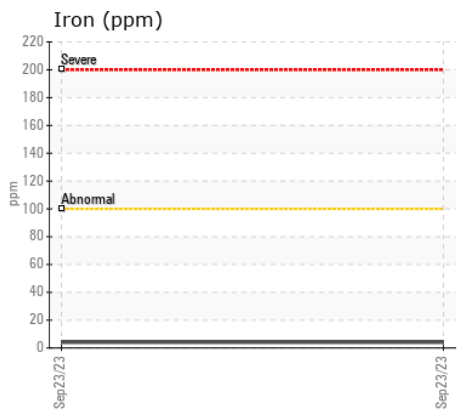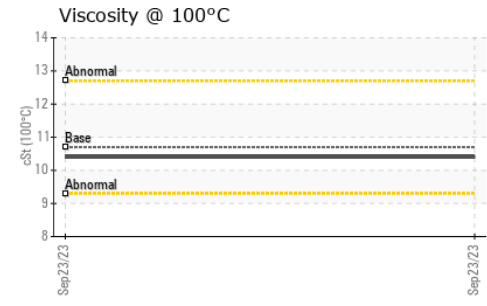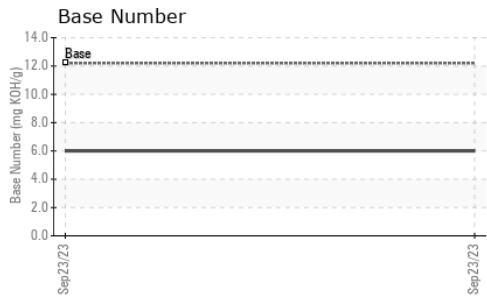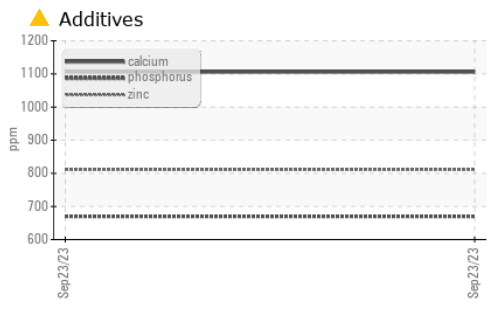

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0632531 **Received** : 14 Feb 2024
Lab Number : 06089285 **Tested** : 15 Feb 2024
Unique Number : 10876730 **Diagnosed** : 16 Feb 2024 - Jonathan Hester
Test Package : MOB 1 (Additional Tests: TBN)

PRO-CARE IRRIGATION & TURF
 5746 OLD LIBERTY RD
 FRANKLINVILLE, NC
 US 27248
 Contact: DEREK ROUTH
 derekrouth72@gmail.com
 T: (336)736-6652
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)