



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	SEVERE
FLUID CONDITION	ABNORMAL

Area
[62005758879]

Machine Id

6

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 15W40 (--- QTS)

RECOMMENDATION

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0828076	WC0828110	WC0799989
Sample Date		Client Info		05 Feb 2024	11 Oct 2023	04 Apr 2023
Machine Age	mls	Client Info		139108	134335	129348
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				SEVERE	SEVERE	SEVERE

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	8	31	25
Chromium	ppm	ASTM D5185m	>20	<1	2	1
Nickel	ppm	ASTM D5185m	>4	<1	<1	0
Titanium	ppm	ASTM D5185m		65	41	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	6	11	11
Lead	ppm	ASTM D5185m	>40	1	2	1
Copper	ppm	ASTM D5185m	>330	<1	1	<1
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Silicon	ppm	ASTM D5185m	>25	5	7	5
Potassium	ppm	ASTM D5185m	>20	3	4	4
Fuel	%	ASTM D3524	>5	12.0	28.8	17.4
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.9	0.5
Nitration	Abs/cm	*ASTM D7624	>20	9.2	12.4	11.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.3	24.3	24.7
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185m	>158	<1	2	2
Boron	ppm	ASTM D5185m	250	103	52	49
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	6	8	9
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	382	356	591
Calcium	ppm	ASTM D5185m	3000	1373	1112	1125
Phosphorus	ppm	ASTM D5185m	1150	889	681	898
Zinc	ppm	ASTM D5185m	1350	1029	837	1046
Sulfur	ppm	ASTM D5185m	4250	3279	2517	3730
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.9	24.5	23.4
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.2	5.4	6.1
Visc @ 100°C	cSt	ASTM D445	14.4	11.2	8.5	9.8

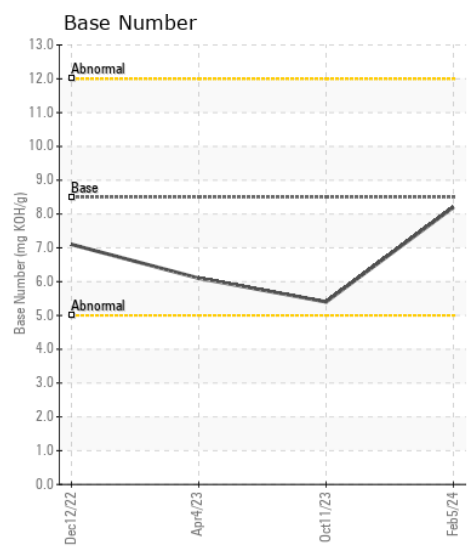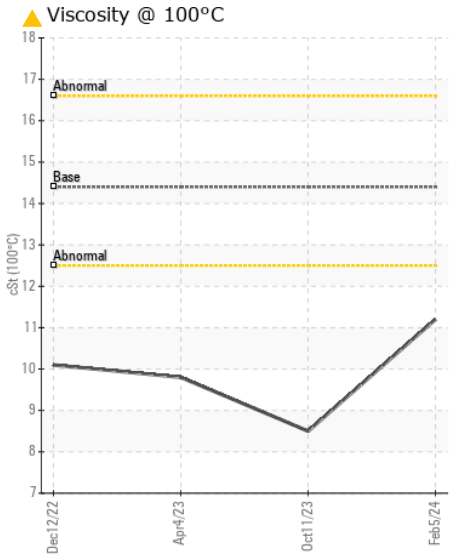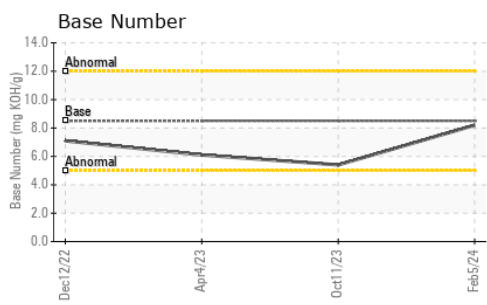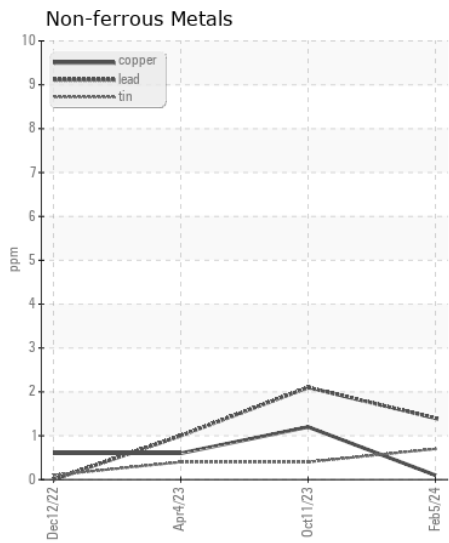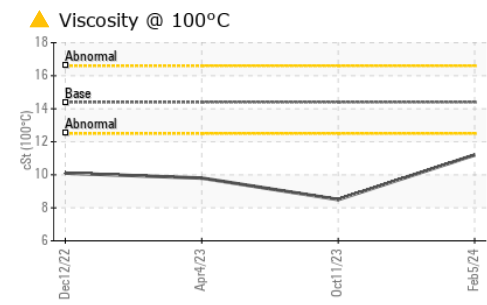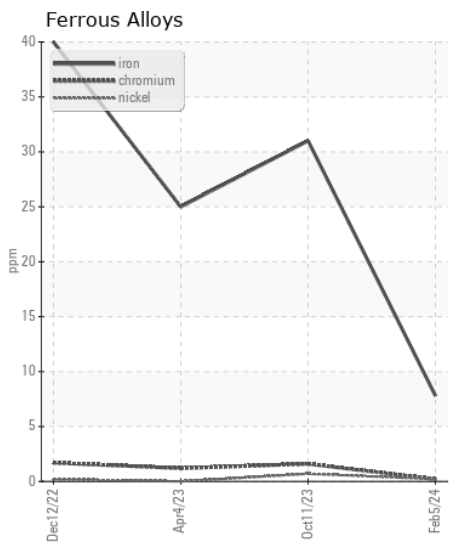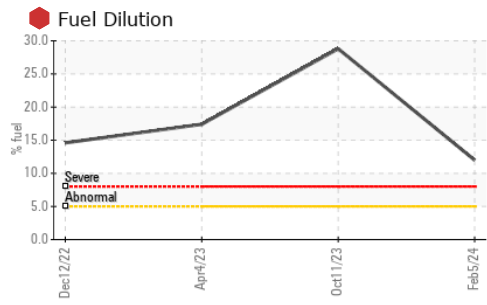

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0828076 **Received** : 14 Feb 2024
Lab Number : 06089488 **Tested** : 19 Feb 2024
Unique Number : 10876933 **Diagnosed** : 19 Feb 2024 - Wes Davis
Test Package : FLEET (Additional Tests: PercentFuel)

CASWELL COUNTY SCHOOL BUS
 353 COUNTY HOME ROAD
 YANCEYVILLE, NC
 US 27379
 Contact: DEBRA MOORE
 debra.moore@caswell.k12.nc.us
 T: (336)694-4116
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)