



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
333H
Component
Hydraulic System
Fluid
AW HYDRAULIC OIL ISO 32 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		KL0014000	KL0013269	---
Sample Date		Client Info		26 Jan 2024	11 Oct 2023	---
Machine Age	hrs	Client Info		17193	1855	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	8	9	---
Chromium	ppm	ASTM D5185m	>10	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>10	1	<1	---
Lead	ppm	ASTM D5185m	>10	0	0	---
Copper	ppm	ASTM D5185m	>75	<1	<1	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	3	4	---
Potassium	ppm	ASTM D5185m	>20	<1	2	---
Water		WC Method	>0.1	NEG	NEG	---
Particles >4µm		ASTM D7647		13624	---	---
Particles >6µm		ASTM D7647	>1300	901	---	---
Particles >14µm		ASTM D7647	>160	19	---	---
Particles >21µm		ASTM D7647	>40	5	---	---
Particles >38µm		ASTM D7647	>10	0	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>17/14	17/11	---	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	2	---
Boron	ppm	ASTM D5185m	5	0	0	---
Barium	ppm	ASTM D5185m	5	2	0	---
Molybdenum	ppm	ASTM D5185m	5	0	<1	---
Manganese	ppm	ASTM D5185m		0	<1	---
Magnesium	ppm	ASTM D5185m	25	9	8	---
Calcium	ppm	ASTM D5185m	200	56	67	---
Phosphorus	ppm	ASTM D5185m	300	328	380	---
Zinc	ppm	ASTM D5185m	370	425	513	---
Sulfur	ppm	ASTM D5185m	2500	1002	1153	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.23	---	---
Visc @ 40°C	cSt	ASTM D445	32	31.8	31.5	---

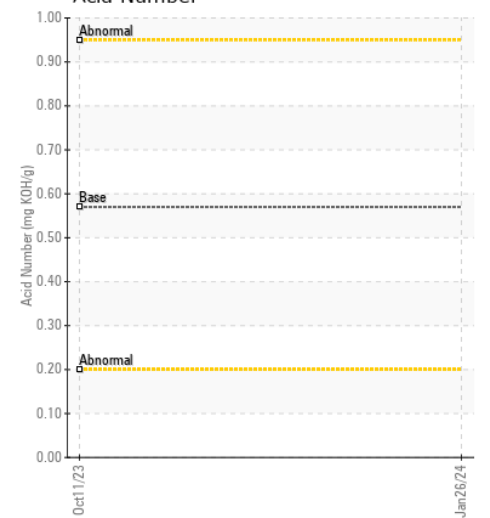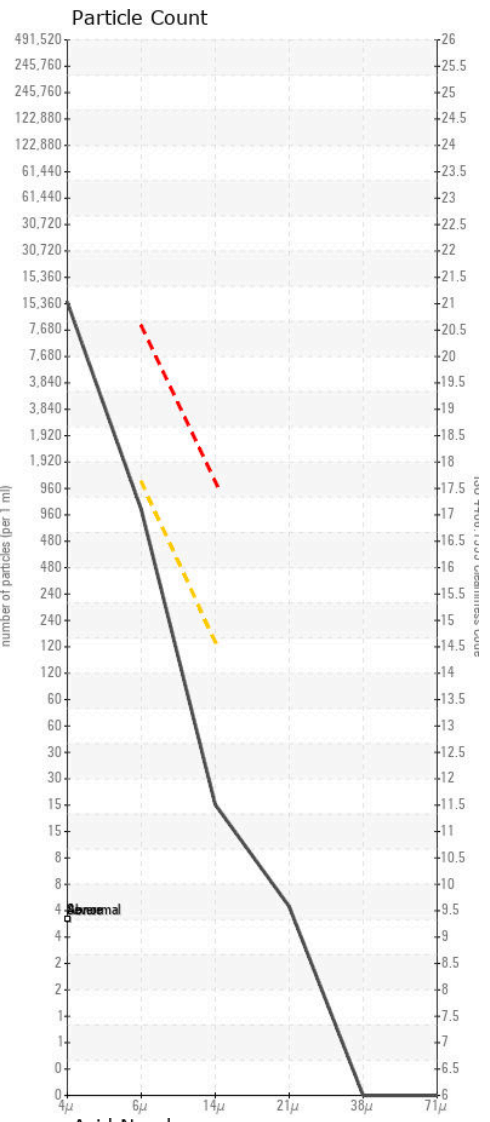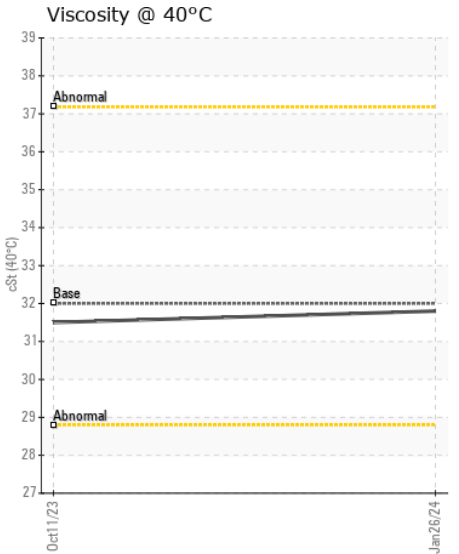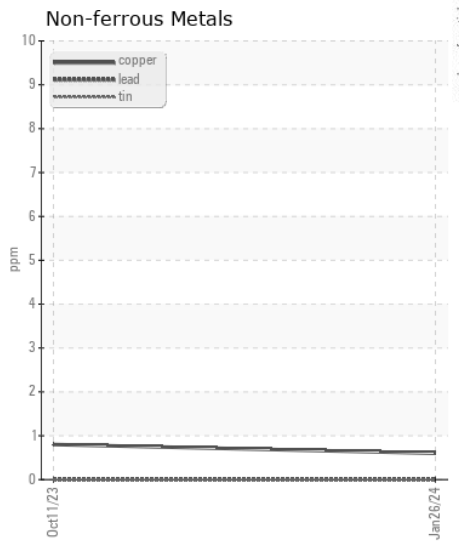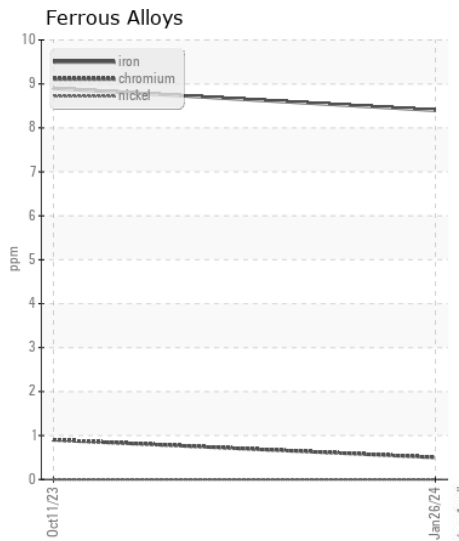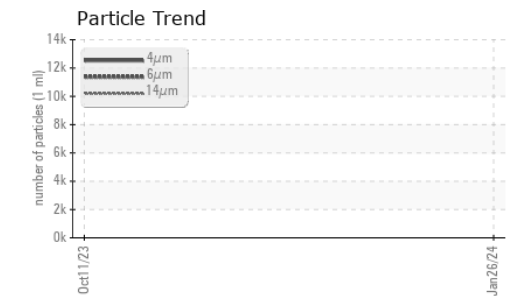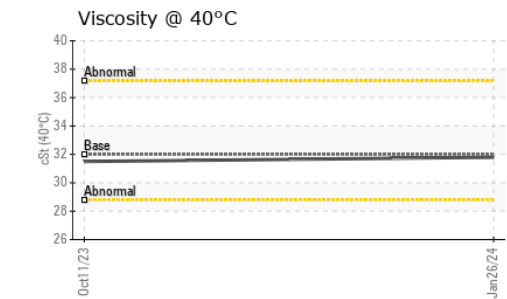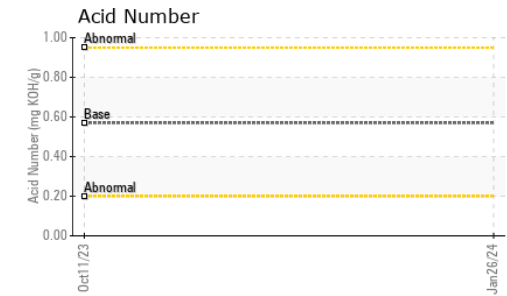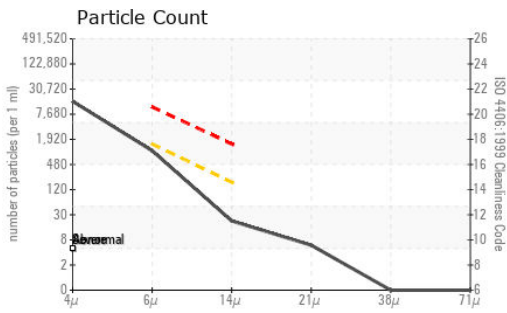

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0014000 **Received** : 14 Feb 2024
Lab Number : 06089528 **Tested** : 15 Feb 2024
Unique Number : 10876973 **Diagnosed** : 15 Feb 2024 - Wes Davis
Test Package : MOB 2

CITY OF ARTESIA
 P.O. BOX 1310
 ARTESIA, NM
 US 88211
 Contact: JIMMY L. BUSTAMANTE
 JBUSTAMANTE@ARTESIANM.GOV
 T: (575)748-8812
 F: (575)746-2390

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)