



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
INGERSOLL RAND WALL STREET 6
 Component
Compressor
 Fluid
SULLAIR SULLUBE (30 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		CCSI2014068	---	---
Sample Date		Client Info		13 Feb 2024	---	---
Machine Age	hrs	Client Info		34123	---	---
Oil Age	hrs	Client Info		4000	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	0	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m		0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	1	---	---
Lead	ppm	ASTM D5185m	>25	0	---	---
Copper	ppm	ASTM D5185m	>50	<1	---	---
Tin	ppm	ASTM D5185m	>15	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>25	<1	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>10000	1661	---	---
Particles >6µm		ASTM D7647	>2500	360	---	---
Particles >14µm		ASTM D7647	>320	27	---	---
Particles >21µm		ASTM D7647	>80	9	---	---
Particles >38µm		ASTM D7647	>20	1	---	---
Particles >71µm		ASTM D7647	>4	0	---	---
Oil Cleanliness		ISO 4406 (c)	>20/18/15	18/16/12	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		6	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m	745	453	---	---
Molybdenum	ppm	ASTM D5185m	0.0	0	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m	0.0	1	---	---
Calcium	ppm	ASTM D5185m	1	2	---	---
Phosphorus	ppm	ASTM D5185m	3	0	---	---
Zinc	ppm	ASTM D5185m	0.1	13	---	---
Sulfur	ppm	ASTM D5185m	240	201	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	.06	0.12	---	---
Visc @ 40°C	cSt	ASTM D445	38.1	42.8	---	---

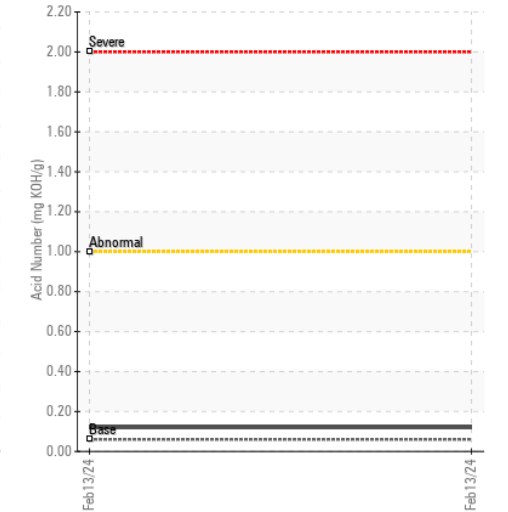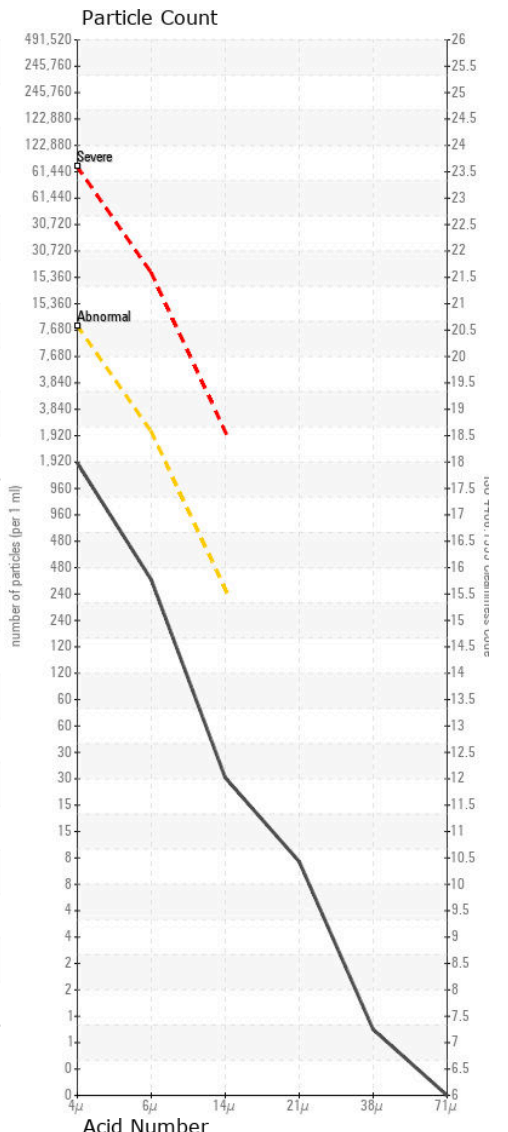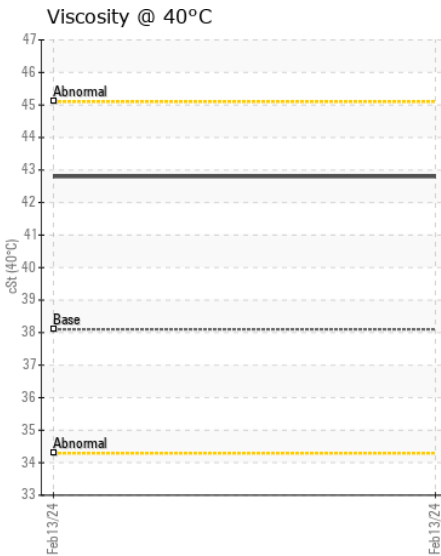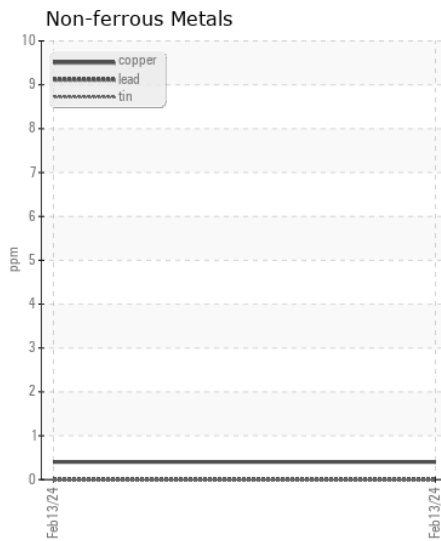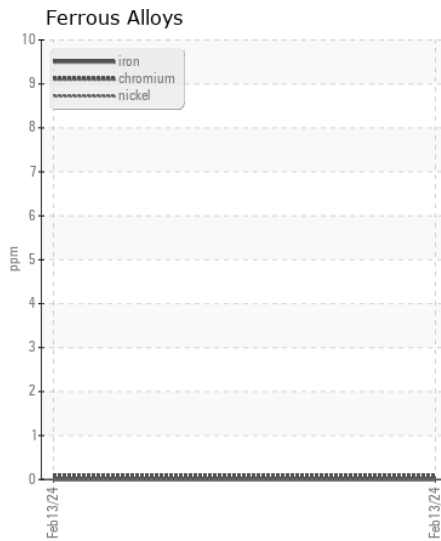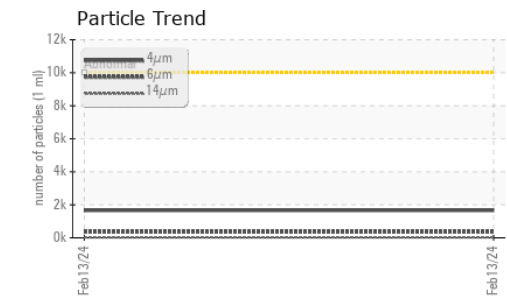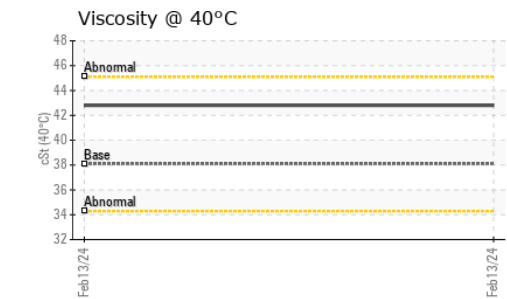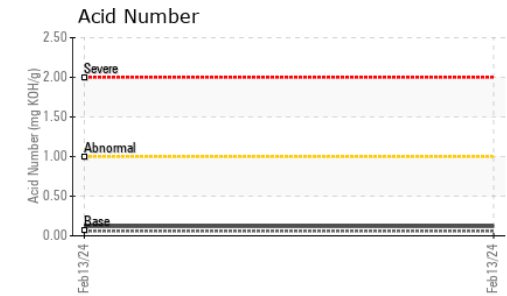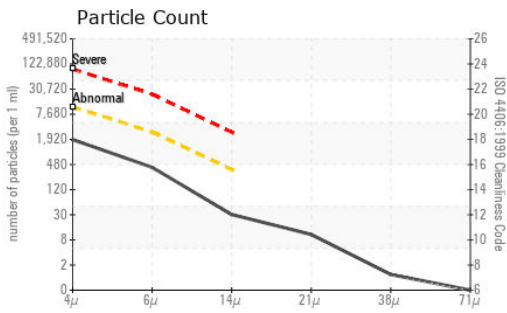

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : CCSI2014068 **Received** : 14 Feb 2024
Lab Number : 06089535 **Tested** : 15 Feb 2024
Unique Number : 10876980 **Diagnosed** : 16 Feb 2024 - Don Baldrige
Test Package : IND 2 (Additional Tests: PrtCount)

MOHAWK INDUSTRIES
 431 S GREEN ST
 DALTON, GA
 US 30721
 Contact: MICHAEL BRYANT
 michael_bryant@mohawkind.com
 T: (706)270-4325
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)