



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FALK MISS KATHY
Component
Port Reduction Gear
Fluid
MOBIL MOBILGEAR 600 XP 220 (135 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0044116	MW0044205	MW0044131
Sample Date		Client Info		01 Feb 2024	05 Dec 2023	01 Oct 2023
Machine Age	hrs	Client Info		48649	0	42000
Oil Age	hrs	Client Info		48649	0	2866
Filter Age	hrs	Client Info		450	373	0
Oil Changed		Client Info		Not Changd	N/A	N/A
Filter Changed		Client Info		N/A	Changed	None
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	16	18	17
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>10	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	<1	0
Lead	ppm	ASTM D5185m	>100	<1	<1	0
Copper	ppm	ASTM D5185m	>50	5	6	6
Tin	ppm	ASTM D5185m	>10	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	1	1	<1
Potassium	ppm	ASTM D5185m	>20	2	3	2
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	2	2
Boron	ppm	ASTM D5185m		8	8	8
Barium	ppm	ASTM D5185m		5	0	0
Molybdenum	ppm	ASTM D5185m		2	0	<1
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		6	1	5
Calcium	ppm	ASTM D5185m		20	19	7
Phosphorus	ppm	ASTM D5185m		223	264	227
Zinc	ppm	ASTM D5185m		0	0	1
Sulfur	ppm	ASTM D5185m		5751	6383	5817
Acid Number (AN)	mg KOH/g	ASTM D8045		0.53	0.532	0.58
Visc @ 40°C	cSt	ASTM D445	220	225	223	227

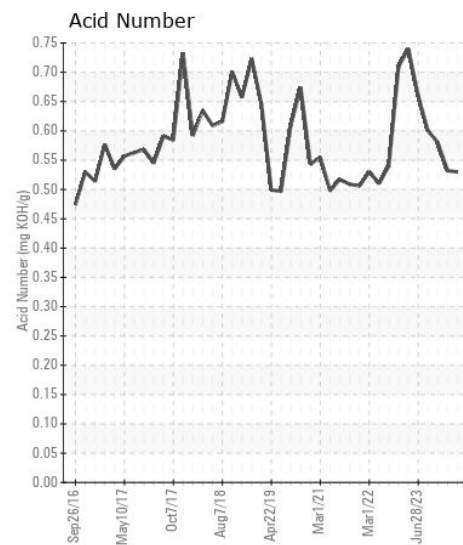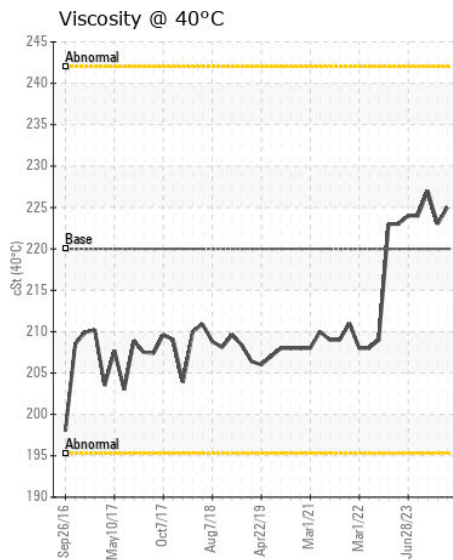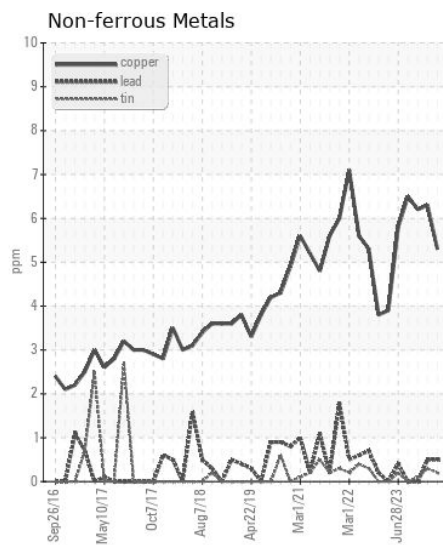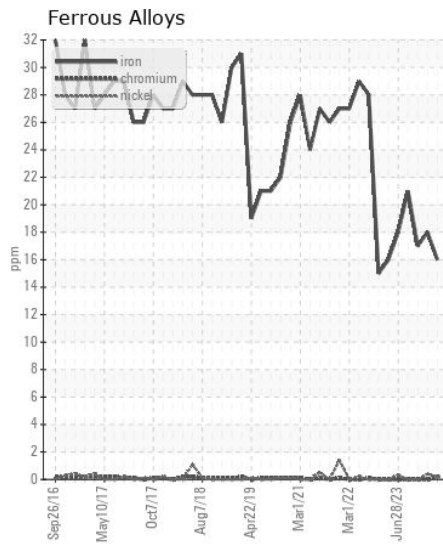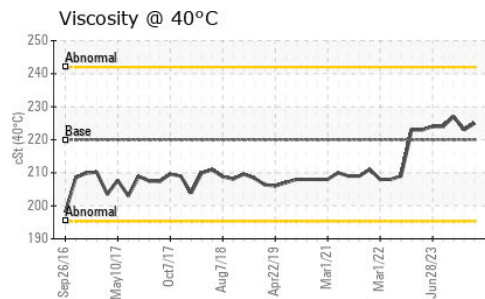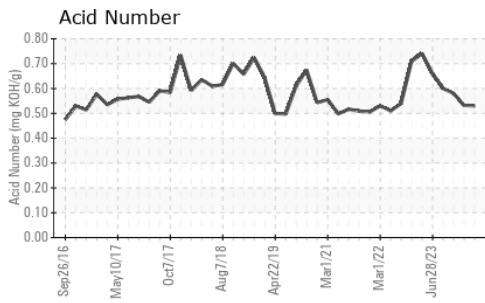

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0044116
Lab Number : 06089612
Unique Number : 10877057
Test Package : MAR 2

Received : 14 Feb 2024
Tested : 15 Feb 2024
Diagnosed : 16 Feb 2024 - Jonathan Hester

MAGNOLIA MARINE TRANSPORT
 697 HAINING ROAD
 VICKSBURG, MS
 US 39183
 Contact: MMT MAINTENANCE PLANNERS
 mmtmaintenanceplanners@ergon.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x:
 F: (601)638-8028