



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**35168**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 40 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>KL0014015</b>	KL0012071	KL0012066
Sample Date		Client Info		<b>01 Feb 2024</b>	31 Oct 2023	27 Jul 2023
Machine Age	mls	Client Info		<b>60242</b>	57979	46406
Oil Age	mls	Client Info		<b>57979</b>	0	0
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>40</b>	27	15
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>9</b>	5	3
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>330	<b>24</b>	23	26
Tin	ppm	ASTM D5185m	>15	<b>2</b>	2	2
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION










There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>25	<b>10</b>	6	4
Potassium	ppm	ASTM D5185m	>20	<b>28</b>	12	10
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>1.2</b>	0.9	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>12.3</b>	11.3	8.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>25.3</b>	24.0	20.4
Particles >4µm		ASTM D7647		<b>1435</b>	2427	1731
Particles >6µm		ASTM D7647	>5000	<b>782</b>	1322	943
Particles >14µm		ASTM D7647	>640	<b>133</b>	225	161
Particles >21µm		ASTM D7647	>160	<b>45</b>	76	54
Particles >38µm		ASTM D7647	>40	<b>7</b>	12	8
Particles >71µm		ASTM D7647	>10	<b>1</b>	1	1
Oil Cleanliness		ISO 4406 (c)	>19/16	<b>17/14</b>	18/15	17/15
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	<b>4</b>	4	2
Boron	ppm	ASTM D5185m	250	<b>16</b>	20	55
Barium	ppm	ASTM D5185m	10	<b>11</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>61</b>	59	60
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>1074</b>	1179	1120
Calcium	ppm	ASTM D5185m	3000	<b>1017</b>	1119	1111
Phosphorus	ppm	ASTM D5185m	1150	<b>962</b>	1093	1049
Zinc	ppm	ASTM D5185m	1350	<b>1220</b>	1362	1295
Sulfur	ppm	ASTM D5185m	4250	<b>2848</b>	2933	3818
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>23.7</b>	21.7	16.4
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>9.09</b>	10.66	11.28
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.1</b>	12.7	12.8

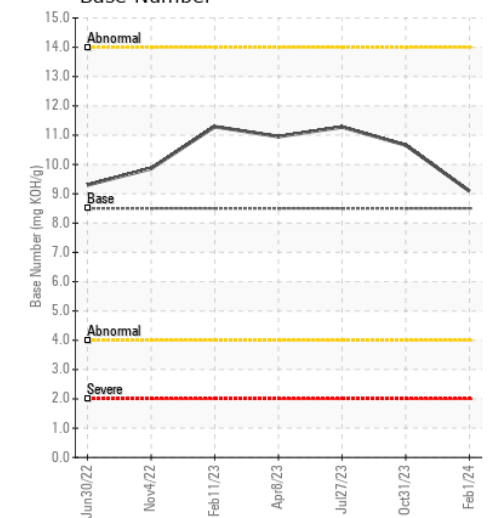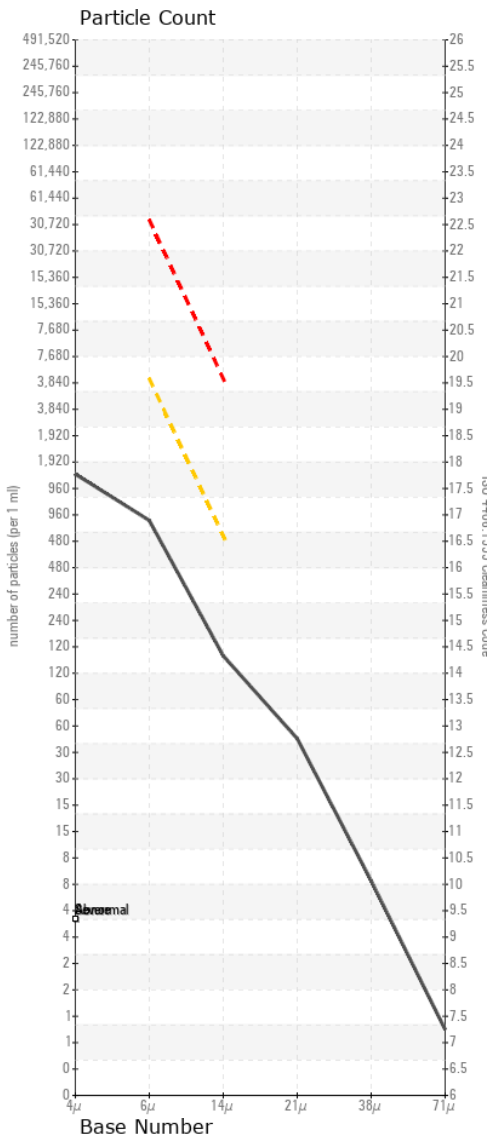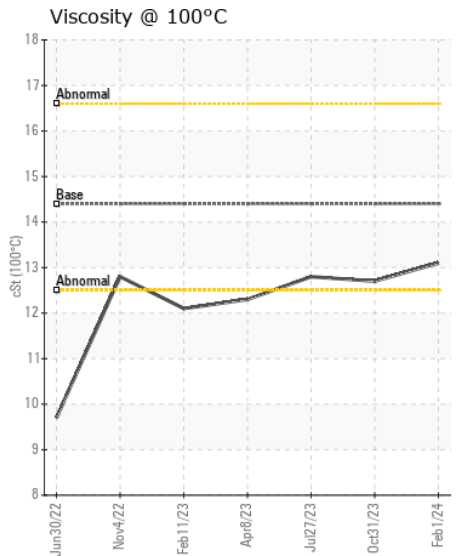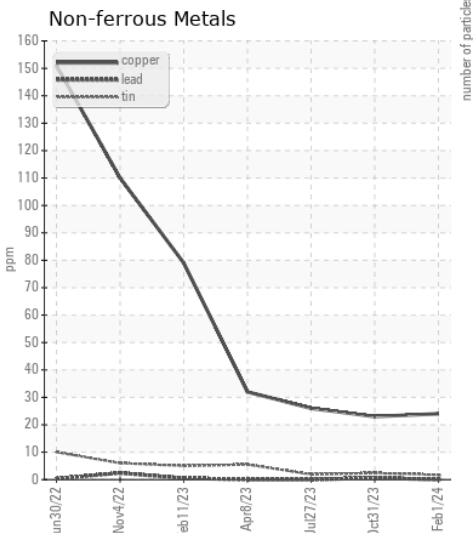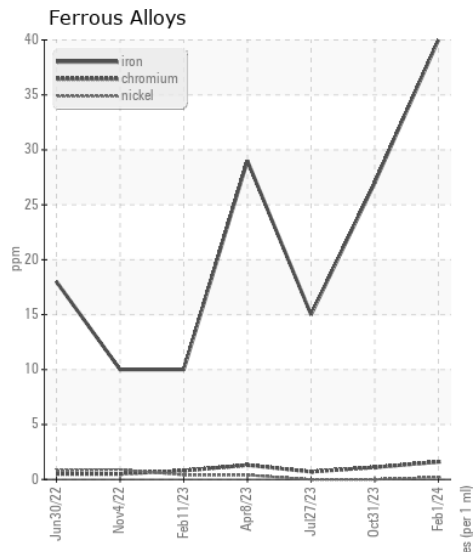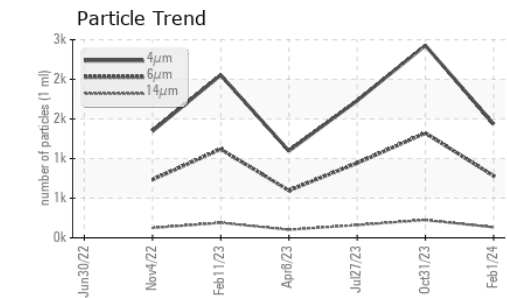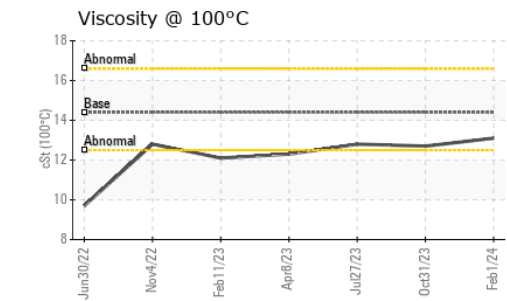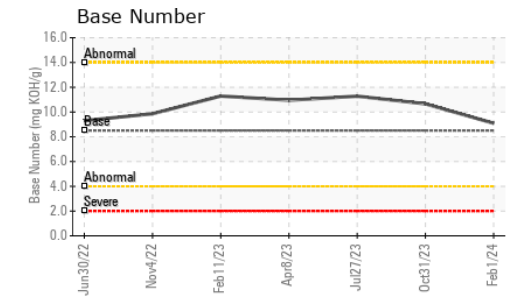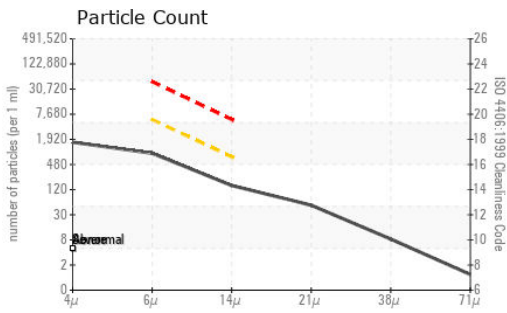

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KL0014015 **Received** : 14 Feb 2024  
**Lab Number** : 06089639 **Tested** : 16 Feb 2024  
**Unique Number** : 10877084 **Diagnosed** : 16 Feb 2024 - Jonathan Hester  
**Test Package** : MOB 2 ( Additional Tests: PrtCount )

**CITY & COUNTY HONOLULU**  
 99-999 IWAENA RD  
 AIEA, HI  
 US 96701  
 Contact: CLYDE OMIJA  
 comija@honolulu.gov  
 T: (575)623-9952  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)