



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Area
LES GRIMM
Machine Id
[LES GRIMM] 001 569145-1
Component
Port Main Engine
Fluid
CHEVRON DELO 710 LE (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | MW0059881 | MW0059877 | MW0059875 |
| Sample Date | | Client Info | | 01 Feb 2024 | 01 Jan 2024 | 01 Dec 2023 |
| Machine Age | hrs | Client Info | | 34028 | 33275 | 32539 |
| Oil Age | hrs | Client Info | | 34028 | 33275 | 32539 |
| Filter Age | hrs | Client Info | | 1108 | 388 | 1032 |
| Oil Changed | | Client Info | | Not Changd | Not Changd | Not Changd |
| Filter Changed | | Client Info | | Changed | Changed | Not Changd |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >75 | 11 | 9 | 8 |
| Chromium | ppm | ASTM D5185m | >8 | <1 | 1 | <1 |
| Nickel | ppm | ASTM D5185m | >2 | 0 | 0 | <1 |
| Titanium | ppm | ASTM D5185m | >3 | <1 | 0 | <1 |
| Silver | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >15 | 1 | 2 | 2 |
| Lead | ppm | ASTM D5185m | >18 | 7 | 9 | 9 |
| Copper | ppm | ASTM D5185m | >80 | 19 | 17 | 19 |
| Tin | ppm | ASTM D5185m | >14 | 4 | 5 | 5 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION







There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >20 | 6 | 6 | 6 |
| Potassium | ppm | ASTM D5185m | >20 | 2 | <1 | 3 |
| Fuel | | WC Method | >4.0 | <1.0 | <1.0 | <1.0 |
| Water | | WC Method | >0.1 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | *ASTM D7844 | | 0.7 | 0.7 | 0.7 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 9.1 | 9.0 | 9.1 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 17.4 | 17.3 | 17.4 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG | NEG |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|-------------|------|------|
| Sodium | ppm | ASTM D5185m | >75 | 14 | 16 | 21 |
| Boron | ppm | ASTM D5185m | | 31 | 29 | 31 |
| Barium | ppm | ASTM D5185m | | 11 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 44 | 45 | 44 |
| Manganese | ppm | ASTM D5185m | | 0 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | | 18 | 15 | 16 |
| Calcium | ppm | ASTM D5185m | | 3149 | 3375 | 3356 |
| Phosphorus | ppm | ASTM D5185m | | 38 | 6 | 5 |
| Zinc | ppm | ASTM D5185m | 10 | 17 | 3 | 0 |
| Sulfur | ppm | ASTM D5185m | | 2425 | 2373 | 2271 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 9.4 | 9.3 | 9.0 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 9.2 | 9.02 | 9.14 | 8.96 |
| Visc @ 100°C | cSt | ASTM D445 | 15.5 | 14.4 | 14.5 | 14.5 |

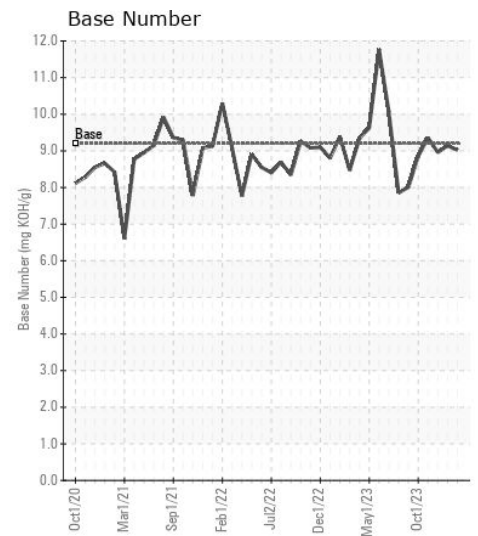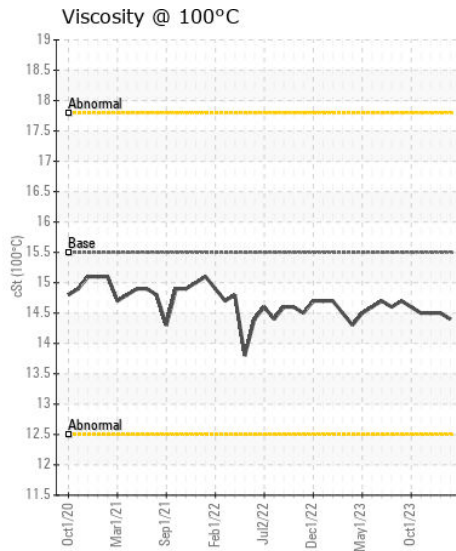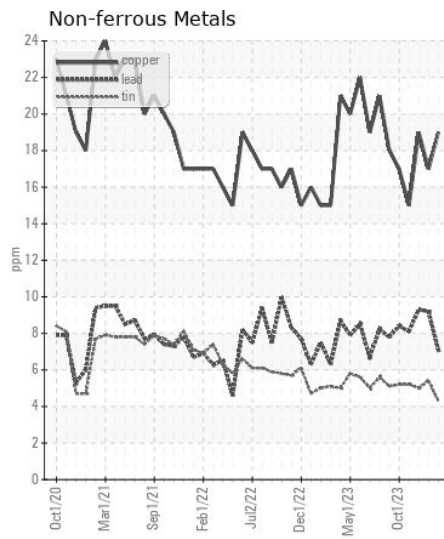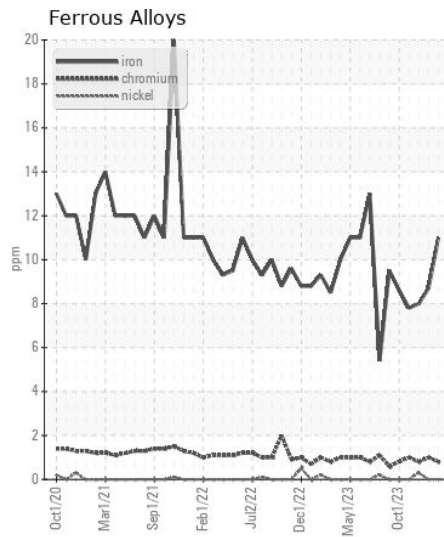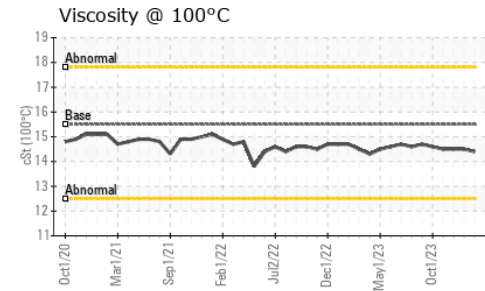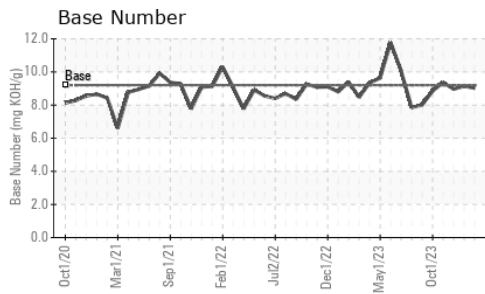

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : MW0059881

Lab Number : 06089654

Unique Number : 10877099

Test Package : MAR 2

Received : 14 Feb 2024

Tested : 16 Feb 2024

Diagnosed : 16 Feb 2024 - Wes Davis

INGRAM BARGE

900 S 3RD ST

PADUCAH, KY

US 42003

Contact: ANTHONY VAN CURA

anthony.vancura@ingrambarga.com

T: (270)415-4467

F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)