



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 410E 1DW410EBENF716069
Component
Front Differential
Fluid
TDH FLUID SAE 75W80 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0203891	JR0188891	JR0171079
Sample Date		Client Info		20 Feb 2024	20 Oct 2023	17 Jul 2023
Machine Age	hrs	Client Info		2043	1560	987
Oil Age	hrs	Client Info		2043	1560	480
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		Changed	Not Changd	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		16	11	16
Iron	ppm	ASTM D5185m	>500	36	<1	26
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	<1	<1
Lead	ppm	ASTM D5185m	>25	16	0	9
Copper	ppm	ASTM D5185m	>100	23	0	12
Tin	ppm	ASTM D5185m	>10	3	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	4	5	6
Potassium	ppm	ASTM D5185m	>20	0	<1	0
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	<1	6
Boron	ppm	ASTM D5185m	10	1	<1	1
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	10	<1	0	<1
Manganese	ppm	ASTM D5185m		1	<1	1
Magnesium	ppm	ASTM D5185m	100	88	105	100
Calcium	ppm	ASTM D5185m	3500	3350	3316	3600
Phosphorus	ppm	ASTM D5185m	1150	999	1046	1017
Zinc	ppm	ASTM D5185m	1150	1193	1317	1182
Sulfur	ppm	ASTM D5185m	5000	3353	3812	4195
Visc @ 40°C	cSt	ASTM D445	48	50.9	58.5	51.8

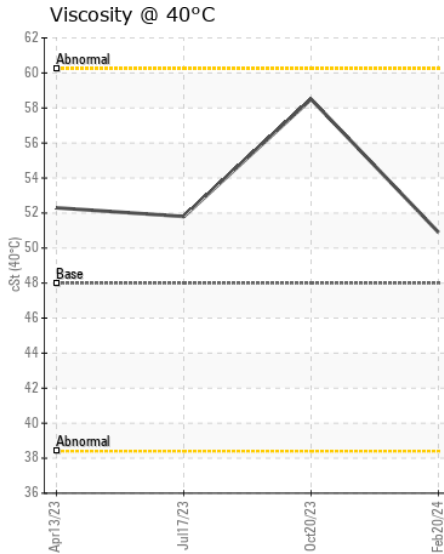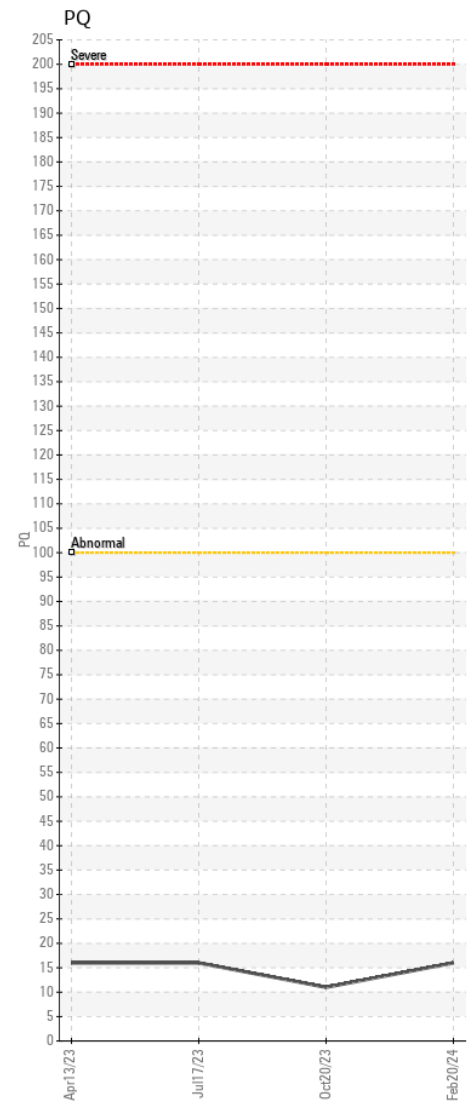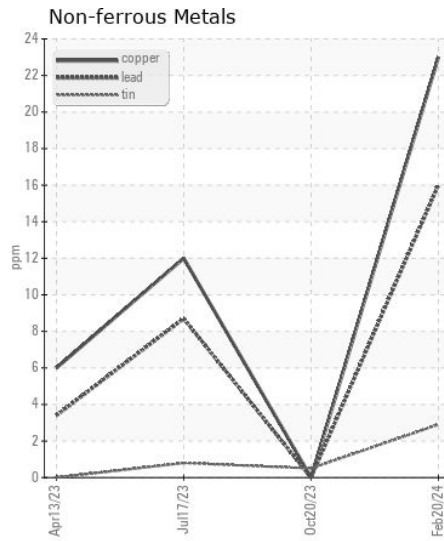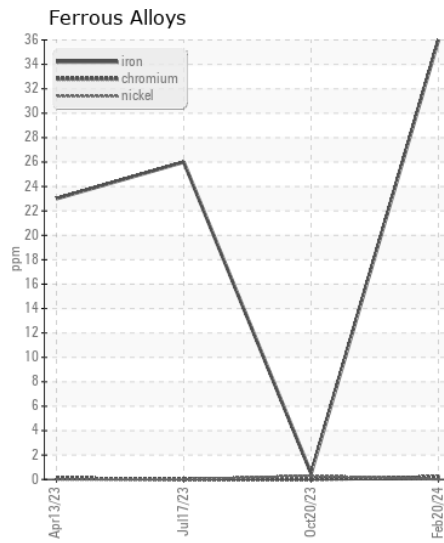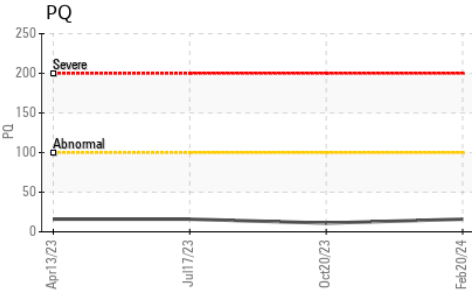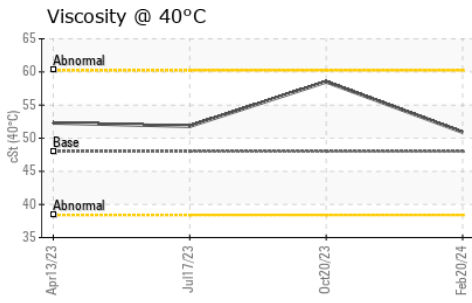

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0203891 **Received** : 22 Feb 2024
Lab Number : 06097262 **Tested** : 23 Feb 2024
Unique Number : 10890115 **Diagnosed** : 23 Feb 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269

Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (704)597-0211
 F: (704)596-6198