



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[A12121]
Machine Id
VOLVO L120H 633139
Component
Front Axle
Fluid
MOBIL WB 102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP440433	VCP416826	VCP393376
Sample Date		Client Info		14 Feb 2024	22 Aug 2023	04 Apr 2023
Machine Age	hrs	Client Info		4430	3210	2260
Oil Age	hrs	Client Info		2000	1000	1260
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	51	34	67
Chromium	ppm	ASTM D5185m	>20	1	<1	2
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	<1	<1	1
Lead	ppm	ASTM D5185m	>50	<1	<1	0
Copper	ppm	ASTM D5185m	>120	<1	0	<1
Tin	ppm	ASTM D5185m	>20	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	10	11	14
Potassium	ppm	ASTM D5185m	>20	0	1	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	<1	2
Boron	ppm	ASTM D5185m		95	121	138
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		5	5	3
Manganese	ppm	ASTM D5185m		2	2	3
Magnesium	ppm	ASTM D5185m		34	45	29
Calcium	ppm	ASTM D5185m		2960	3109	4258
Phosphorus	ppm	ASTM D5185m		993	1030	1351
Zinc	ppm	ASTM D5185m		1231	1293	1650
Sulfur	ppm	ASTM D5185m		3092	4462	4672
Visc @ 40°C	cSt	ASTM D445		43.8	44.5	42.5

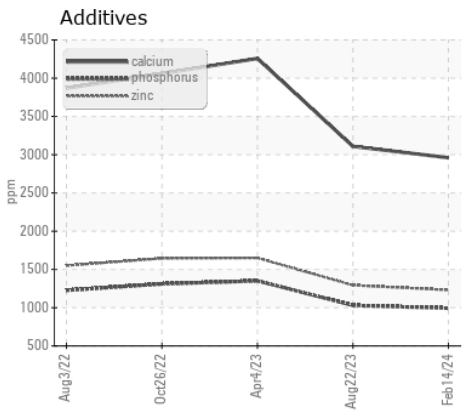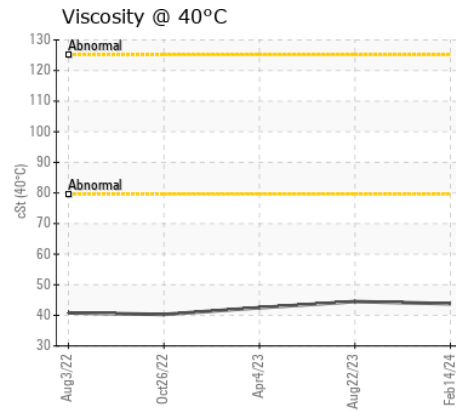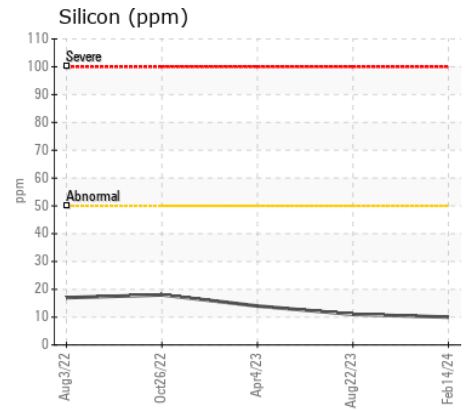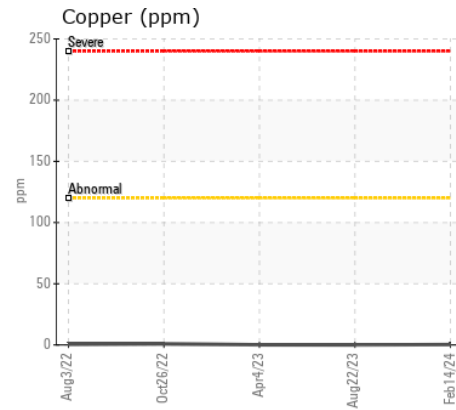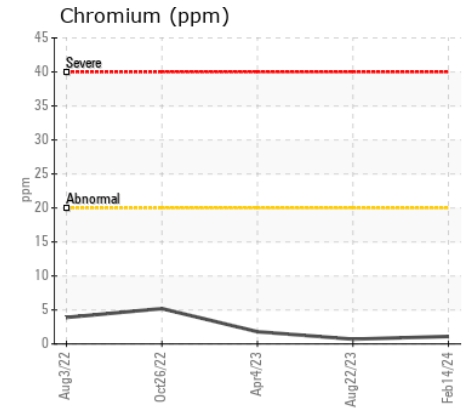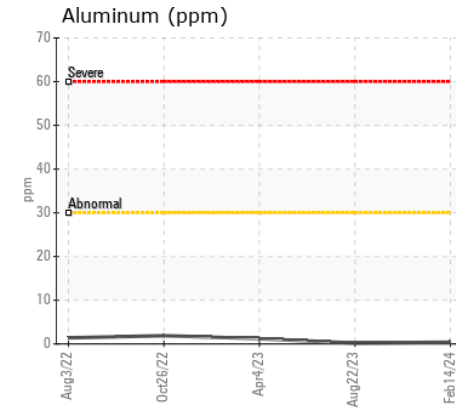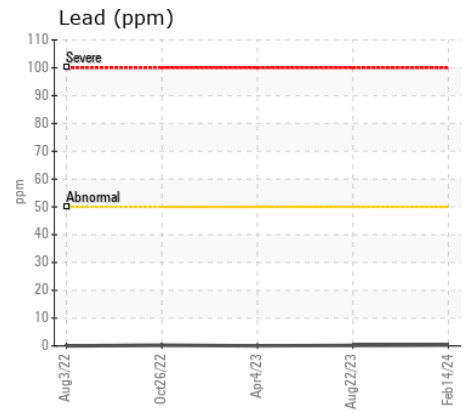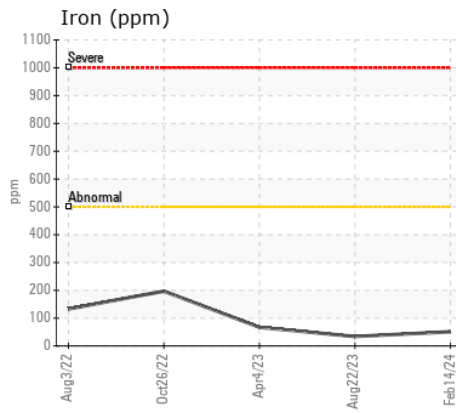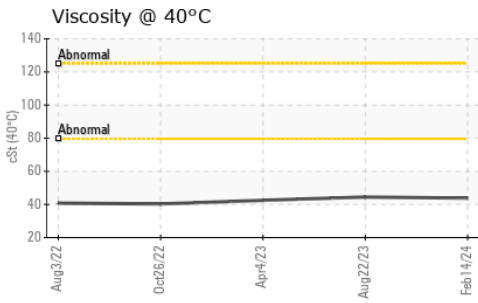

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP440433
Lab Number : 06097296
Unique Number : 10890149
Test Package : MOB 1

Received : 22 Feb 2024
Tested : 23 Feb 2024
Diagnosed : 23 Feb 2024 - Wes Davis

GOURMETS DELIGHT
 PO BOX 160
 AVONDALE, PA
 US 19311

Contact: GABE VALENTINO
 gabe.valentino@gourmetsfinest.com

T: (610)268-3578
 F: (610)268-2298

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)