



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ABNORMAL

Machine Id
CASE 2101 case 721 wheel loader (S/N NFF235162)
 Component
Center Transmission (Auto)
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0028437	---	---
Sample Date		Client Info		15 Feb 2024	---	---
Machine Age	hrs	Client Info		314	---	---
Oil Age	hrs	Client Info		314	---	---
Filter Age	hrs	Client Info		3145	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	22	---	---
Chromium	ppm	ASTM D5185m	>5	0	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>5	0	---	---
Aluminum	ppm	ASTM D5185m	>50	<1	---	---
Lead	ppm	ASTM D5185m	>50	<1	---	---
Copper	ppm	ASTM D5185m	>225	5	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

There is no indication of any contamination in the fluid.


Silicon	ppm	ASTM D5185m	>20	7	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION


The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		11	---	---
Boron	ppm	ASTM D5185m		51	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		0	---	---
Calcium	ppm	ASTM D5185m		2913	---	---
Phosphorus	ppm	ASTM D5185m		1038	---	---
Zinc	ppm	ASTM D5185m		1258	---	---
Sulfur	ppm	ASTM D5185m		3517	---	---
Visc @ 40°C	cSt	ASTM D445		▲ 40.8	---	---


▲ Viscosity @ 40°C

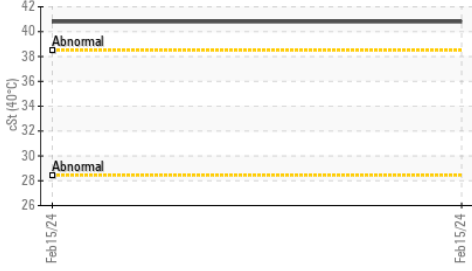


Iron (ppm)

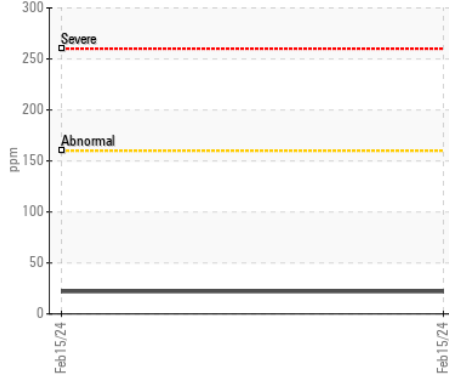


Lead (ppm)

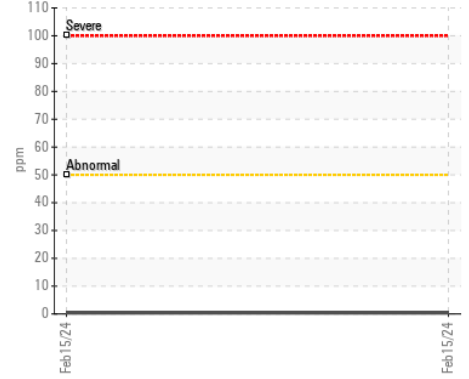


Aluminum (ppm)

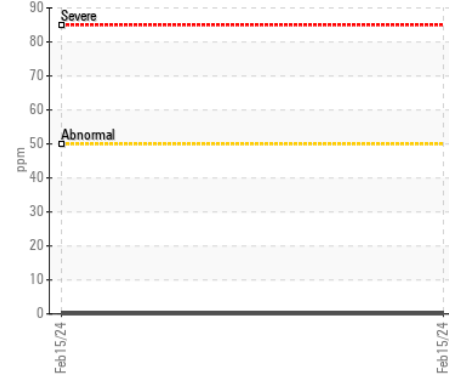


Chromium (ppm)

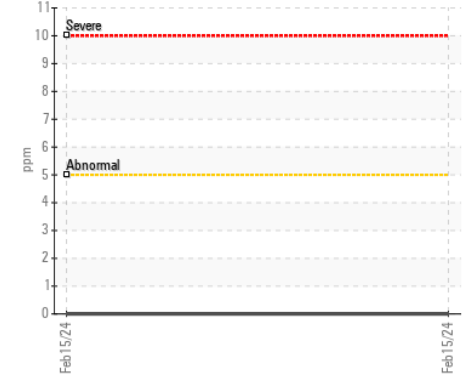


Copper (ppm)

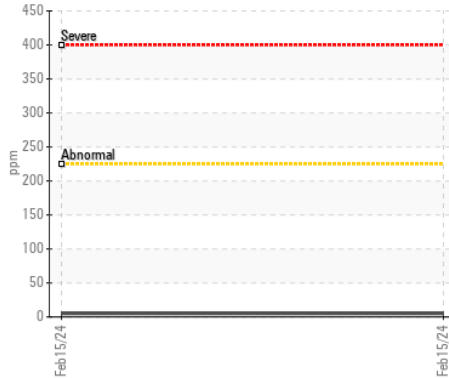


Silicon (ppm)

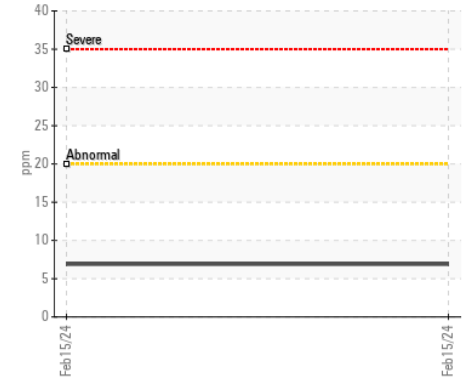

▲ Viscosity @ 40°C

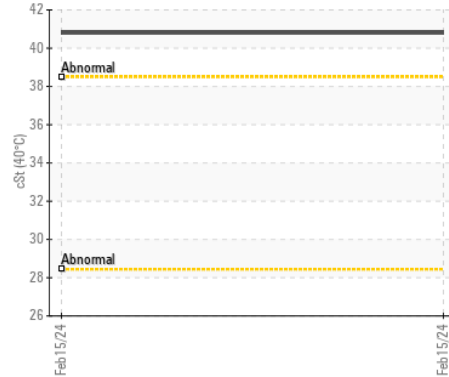

Additives

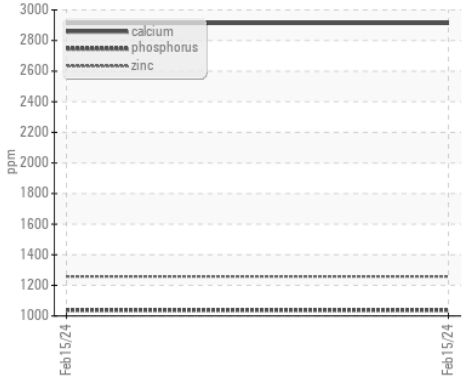

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : DC0028437

Lab Number : 06097329

Unique Number : 10890182

Test Package : MOB 1

Received : 22 Feb 2024

Tested : 23 Feb 2024

Diagnosed : 24 Feb 2024 - Don Baldrige

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

AARON LEASING LLC

300 CLOVERLEAF ROAD

YORK, PA

US 17406

Contact: NATHAN KENNEDY

nkennedy@aaronleasingcompany.com

T: (717)577-5477

F: