



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**CASE 2101 case 721 wheel loader (S/N NFF235162)**  
 Component  
**Hydraulic System**  
 Fluid  
**DURALENE Trans-Flo UTF (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0028436	---	---
Sample Date		Client Info		15 Feb 2024	---	---
Machine Age	hrs	Client Info		3145	---	---
Oil Age	hrs	Client Info		500	---	---
Filter Age	hrs	Client Info		500	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>65	6	---	---
Chromium	ppm	ASTM D5185m	>6	<1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>5	<1	---	---
Lead	ppm	ASTM D5185m	>45	8	---	---
Copper	ppm	ASTM D5185m	>120	19	---	---
Tin	ppm	ASTM D5185m	>4	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

**CONTAMINATION**










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>25	7	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

**FLUID CONDITION**

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		5	---	---
Boron	ppm	ASTM D5185m		23	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		11	---	---
Calcium	ppm	ASTM D5185m		2689	---	---
Phosphorus	ppm	ASTM D5185m		450	---	---
Zinc	ppm	ASTM D5185m		350	---	---
Sulfur	ppm	ASTM D5185m		2440	---	---
Visc @ 40°C	cSt	ASTM D445		42.5	---	---

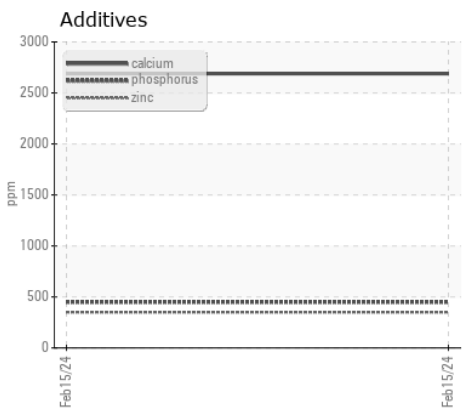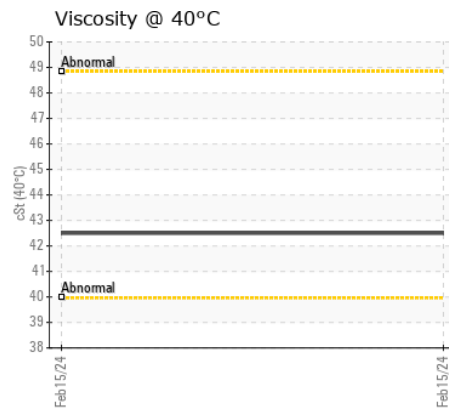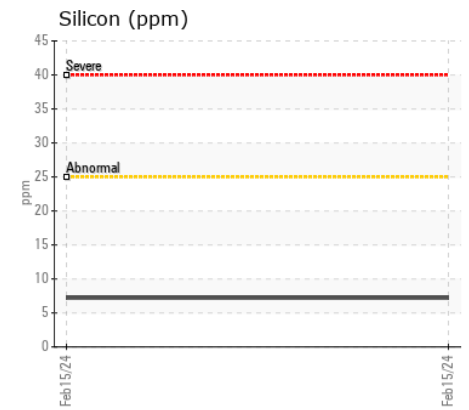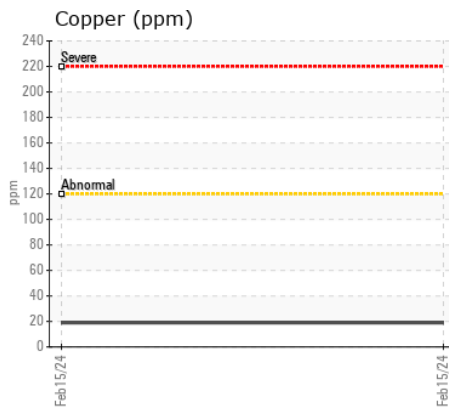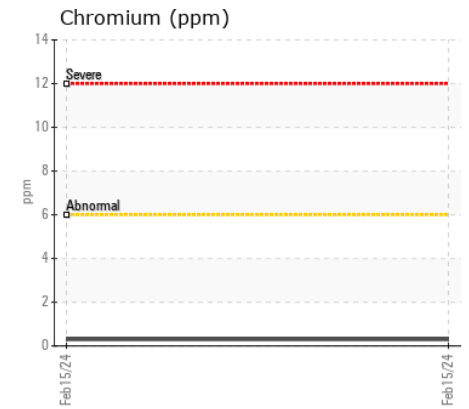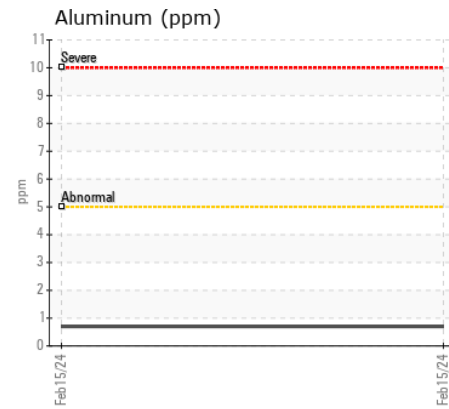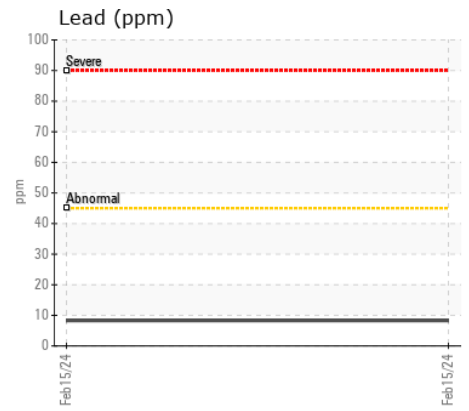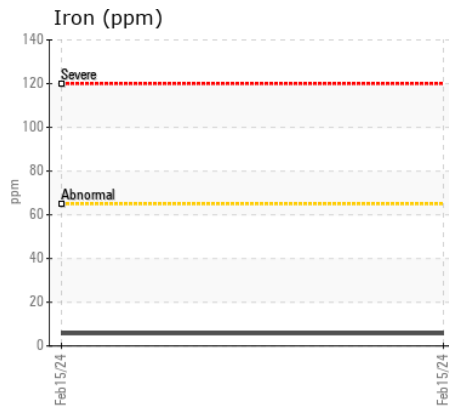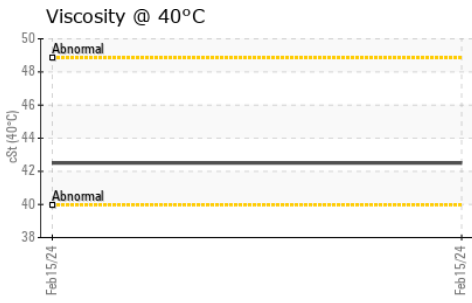

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : DC0028436  
**Lab Number** : 06097331  
**Unique Number** : 10890184  
**Test Package** : MOB 1

**Received** : 22 Feb 2024  
**Tested** : 23 Feb 2024  
**Diagnosed** : 24 Feb 2024 - Don Baldrige

**AARON LEASING LLC**  
 300 CLOVERLEAF ROAD  
 YORK, PA  
 US 17406

Contact: NATHAN KENNEDY  
 nkennedy@aaronleasingcompany.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (717)577-5477

F: