



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
3088
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0195533	JR0195090	---
Sample Date		Client Info		16 Feb 2024	27 Nov 2023	---
Machine Age	mls	Client Info		12179	6699	---
Oil Age	mls	Client Info		5000	6699	---
Filter Age	mls	Client Info		5000	6699	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	17	55	---
Chromium	ppm	ASTM D5185m	>20	<1	1	---
Nickel	ppm	ASTM D5185m	>4	0	<1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>3	0	<1	---
Aluminum	ppm	ASTM D5185m	>20	3	13	---
Lead	ppm	ASTM D5185m	>40	1	2	---
Copper	ppm	ASTM D5185m	>330	6	20	---
Tin	ppm	ASTM D5185m	>15	1	2	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	8	40	---
Potassium	ppm	ASTM D5185m	>20	10	▲ 65	---
Fuel		WC Method	>2.0	<1.0	1.2	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.1	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	6.9	7.1	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	16.9	19.8	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	<1	2	---
Boron	ppm	ASTM D5185m	250	8	101	---
Barium	ppm	ASTM D5185m	10	0	6	---
Molybdenum	ppm	ASTM D5185m	100	7	62	---
Manganese	ppm	ASTM D5185m		<1	5	---
Magnesium	ppm	ASTM D5185m	450	61	418	---
Calcium	ppm	ASTM D5185m	3000	2057	1651	---
Phosphorus	ppm	ASTM D5185m	1150	863	923	---
Zinc	ppm	ASTM D5185m	1350	1023	1145	---
Sulfur	ppm	ASTM D5185m	4250	3457	4327	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	10.2	15.9	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.8	8.6	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.0	11.3	---

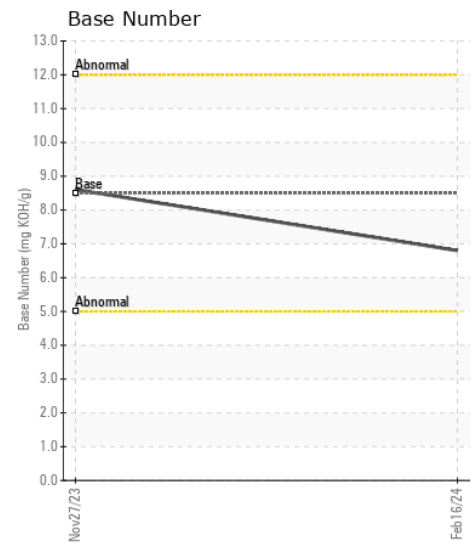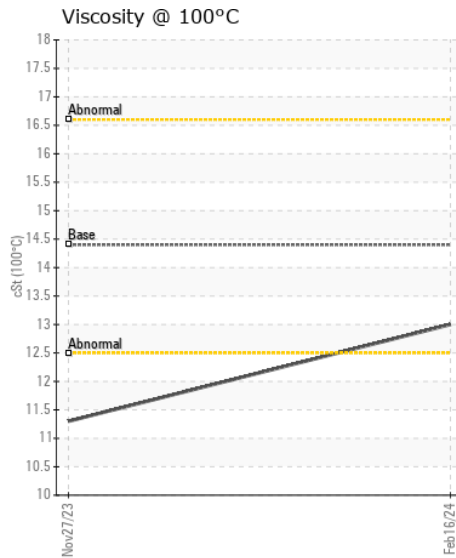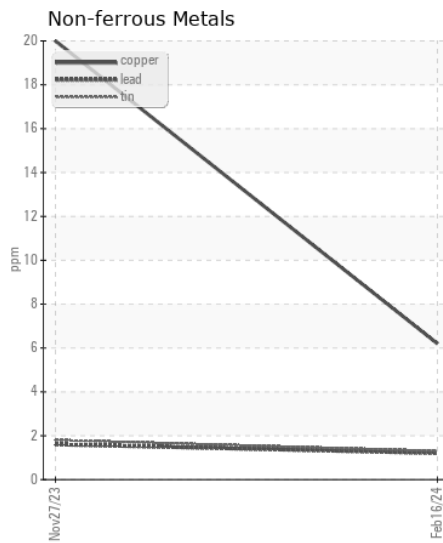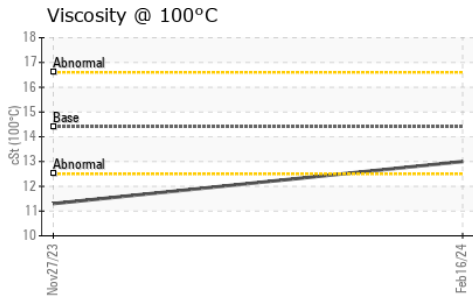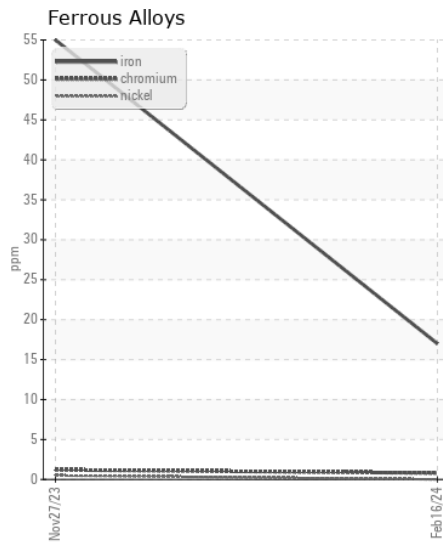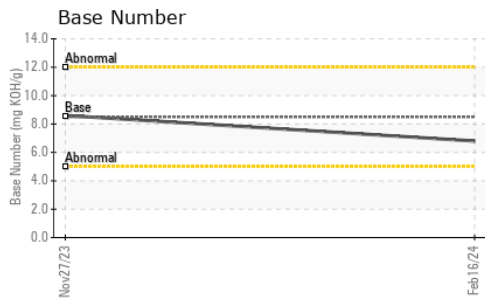

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0195533 **Received** : 22 Feb 2024
Lab Number : 06097398 **Tested** : 23 Feb 2024
Unique Number : 10890251 **Diagnosed** : 23 Feb 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

PATRIOT DEVELOPMENT CORP
 22721 LADBROOK DRIVE STE 120
 STERLING, VA
 US 20166
 Contact: ROBERT MOSS
 robert.moss@patriotdev.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: