



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id

473

Component

Diesel Engine

Fluid

PETRO CANADA DURON HP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0906240	WC0792820	WC0727314
Sample Date		Client Info		15 Feb 2024	01 Aug 2023	16 Feb 2023
Machine Age	mls	Client Info		215046	204398	198880
Oil Age	mls	Client Info		0	5000	0
Filter Age	mls	Client Info		0	5000	0
Oil Changed		Client Info		Not Changd	Not Changd	N/A
Filter Changed		Client Info		Not Changd	Not Changd	N/A
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	5	50	3
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	<1	8	<1
Lead	ppm	ASTM D5185m	>40	<1	<1	<1
Copper	ppm	ASTM D5185m	>330	<1	3	<1
Tin	ppm	ASTM D5185m	>15	<1	<1	0
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	2	4	2
Potassium	ppm	ASTM D5185m	>20	0	▲ 94	2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.8	0.1
Nitration	Abs/cm	*ASTM D7624	>20	5.6	7.7	5.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.4	19.4	17.1
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	30	4
Boron	ppm	ASTM D5185m		7	9	20
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		56	75	63
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m		869	968	852
Calcium	ppm	ASTM D5185m		1122	1282	1165
Phosphorus	ppm	ASTM D5185m		964	1036	1017
Zinc	ppm	ASTM D5185m		1179	1351	1251
Sulfur	ppm	ASTM D5185m		2980	3676	3409
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.0	14.3	12.3
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	8.4	8.6	9.2
Visc @ 100°C	cSt	ASTM D445	15.6	13.6	13.2	13.3

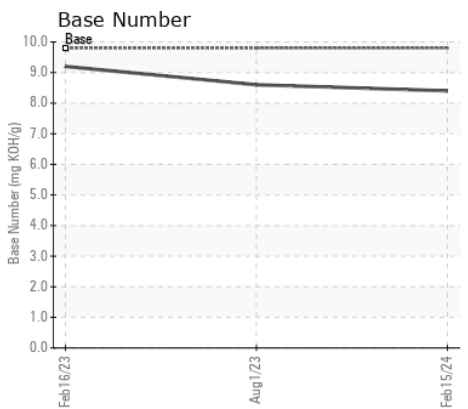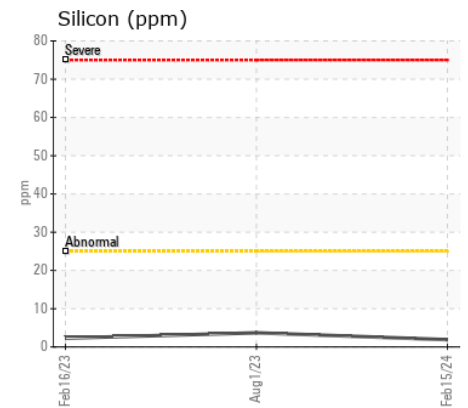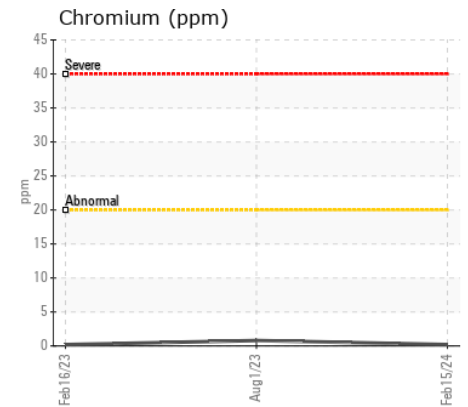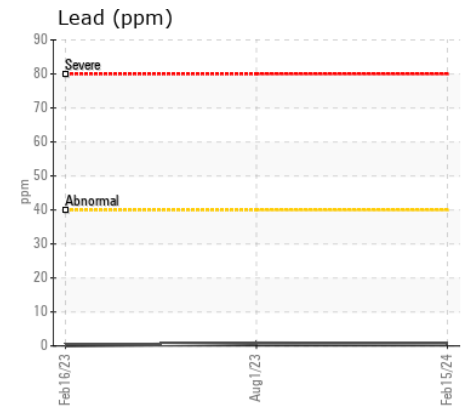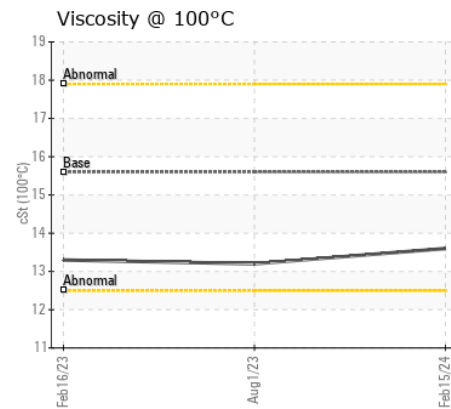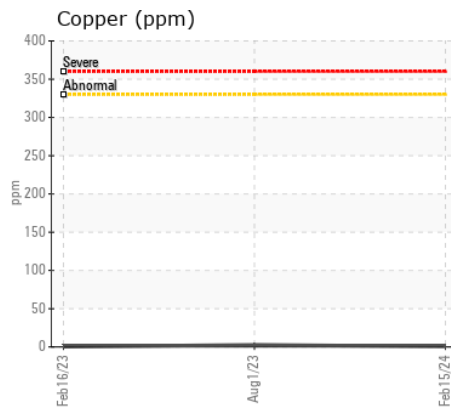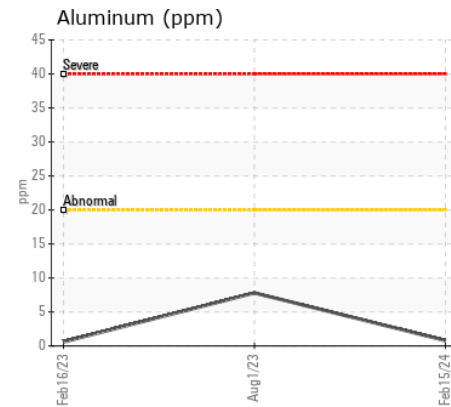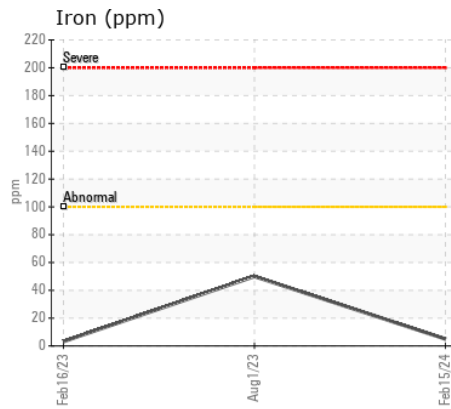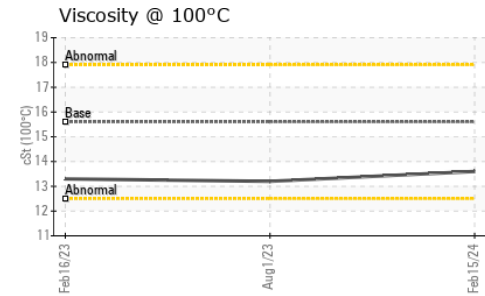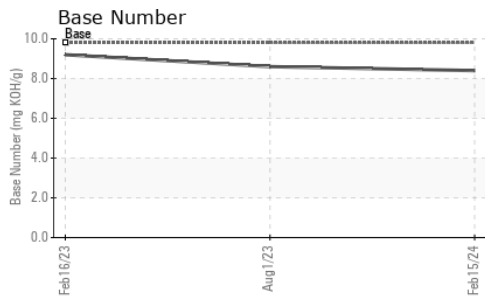

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0906240 **Received** : 22 Feb 2024
Lab Number : 06097495 **Tested** : 23 Feb 2024
Unique Number : 10890348 **Diagnosed** : 23 Feb 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

WAYNE CO SCHOOL BUS GARAGE
 1603 SALEM CHURCH RD
 GOLDSBORO, NC
 US 27530
 Contact: BRANDON BRIGGS
 brandonbriggs@wcps.org

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: