WEAR CONTAMINATION FLUID CONDITION

NORMAL ATTENTION NORMAL




## [HANSON AGGREGATES VA] Machine Id CATERPILLAR 962K C205537 (S/N 962KHFLL00354)

Component Hydraulic System

{not provided} (--- GAL)

RECOMMENDATION	Test	UOM	Method	Limit/Abn	Current	History1	History2
We recommend you service the filters on this component. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.	Sample Number		Client Info		JR0194958		
	Sample Date		Client Info		20 Feb 2024		
	Machine Age	hrs	Client Info		14350		
	Oil Age	hrs	Client Info		0		
	Filter Age	hrs	Client Info		0		
	Oil Changed		Client Info		Not Changd		
	Filter Changed		Client Info		Not Changd		
	Sample Status				ATTENTION		
WEAD			AOTH DOLO		40		
WEAR	PQ		ASTM D8184	00	13		
All component wear rates are normal.	Iron	ppm	ASTM D5185m		4		
	Chromium	ppm	ASTM D5185m		<1		
	Nickel	ppm	ASTM D5185m	>10	0		
	Titanium	ppm	ASTM D5185m		0		
	Silver	ppm	ASTM D5185m		0		
	Aluminum	ppm	ASTM D5185m		<1		
	Lead	ppm	ASTM D5185m		0		
	Copper	ppm	ASTM D5185m		1		
	Tin	ppm	ASTM D5185m	>10	0		
	Vanadium	ppm	ASTM D5185m		0		
	White Metal	scalar	*Visual	NONE	NONE		
	Yellow Metal	scalar	*Visual	NONE	NONE		
CONTANUNATION	0:::		AOTA DE40E	00			
CONTAMINATION	Silicon	ppm	ASTM D5185m		2		
There is a light amount of silt (particulates < 14 microns in size) present in the oil.	Potassium	ppm	ASTM D5185m		0		
	Water		WC Method		NEG		
	Particles >4µm		ASTM D7647		<b>▲</b> 6711		
	Particles >6µm		ASTM D7647		<b>1736</b>		
	Particles >14µm		ASTM D7647		95		
	Particles >21µm		ASTM D7647		20		
	Particles >38µm		ASTM D7647		1		
	Particles >71μm		ASTM D7647		0		
	Oil Cleanliness		ISO 4406 (c)		20/18/14		
	Silt	scalar	*Visual	NONE	NONE		
	Debris	scalar	*Visual	NONE	NONE		
	Sand/Dirt	scalar	*Visual	NONE	NONE		
	Appearance	scalar	*Visual	NORML	NORML		
	Odor	scalar	*Visual	NORML	NORML		
	Emulsified Water	scalar	*Visual	>0.1	NEG		
FLUID CONDITION	Sodium	ppm	ASTM D5185m		<1		
I LOID CONDITION	Boron	ppm	ASTM D5185m		0		
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.	Barium	ppm	ASTM D5185m		0		
	Molybdenum		ASTM D5185m		0		
	Manganese	ppm	ASTM D5185m		0		
	Magnesium		ASTM D5185m		5		
	Calcium	ppm	ASTM D5185m		5 517		
	Phosphorus	ppm	ASTM D5185m		774		
	Zinc	ppm	ASTM D5185m		972		
	Sulfur	ppm	ASTM D5185m		1859		
	Acid Number (AN)		ASTM D3163111 ASTM D8045				
	. ,	mg KOH/g			0.64		
	Visc @ 40°C	cSt	ASTM D445		41.8		

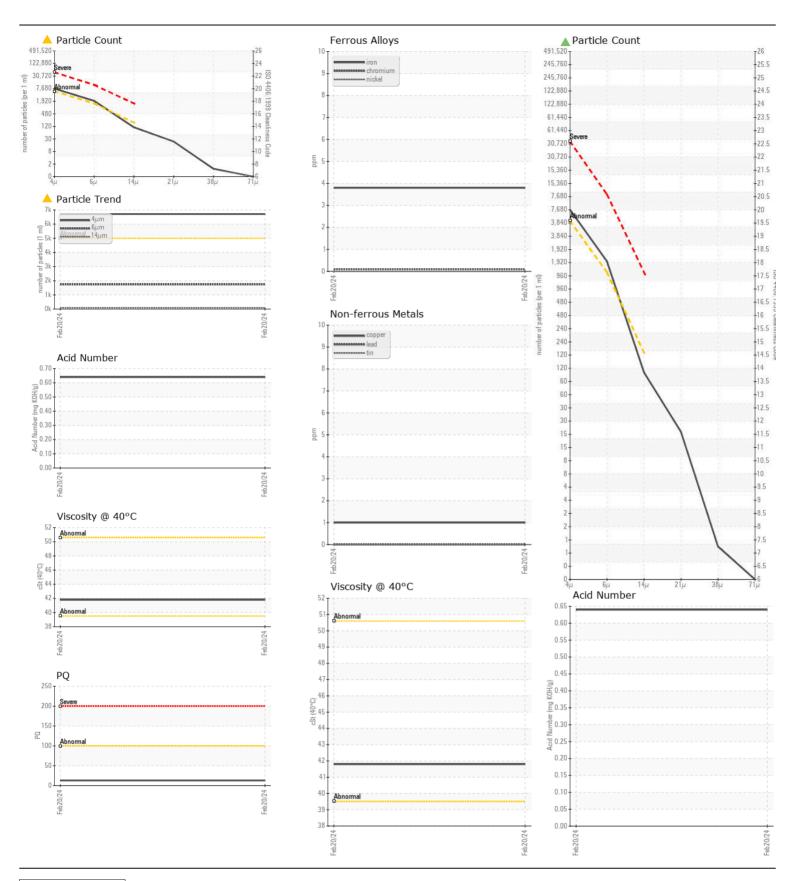



Certificate L2367

Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : JR0194958 Lab Number : 06097616

Unique Number : 10890469

Received : 22 Feb 2024 Tested Diagnosed

: 23 Feb 2024 : 23 Feb 2024 - Wes Davis

JRE - STEPHENSON 245 YARDMASTER COURT STEPHENSON, VA US 22656-1761

Contact: PHIL DAUGHERTY pdaugherty@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Test Package : CONST ( Additional Tests: PQ )

T: x: F: (540)693-2588 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)