



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
MATTEI 094660
 Component
Compressor
 Fluid
ROTOROIL 8000 (1 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.








CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		AN25482	AN25347	AN38863
Sample Date		Client Info		26 Jan 2024	17 Aug 2023	26 Sep 2022
Machine Age	hrs	Client Info		16620	15911	8534
Oil Age	hrs	Client Info		709	3565	0
Filter Age	hrs	Client Info		709	3565	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	NORMAL
Iron	ppm	ASTM D5185m	>50	<1	1	2
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m		<1	<1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	0	1
Lead	ppm	ASTM D5185m	>25	<1	<1	0
Copper	ppm	ASTM D5185m	>50	2	2	<1
Tin	ppm	ASTM D5185m	>15	<1	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185m	>25	3	9	10
Potassium	ppm	ASTM D5185m	>20	<1	2	0
Water	%	ASTM D6304	>0.1	0.016	▲ 0.233	0.042
ppm Water	ppm	ASTM D6304	>1000	164	▲ 2336.5	429.7
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Sodium	ppm	ASTM D5185m		0	4	7
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		5	1	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		0	4	0
Calcium	ppm	ASTM D5185m		3	15	<1
Phosphorus	ppm	ASTM D5185m	884	673	648	5
Zinc	ppm	ASTM D5185m		76	271	64
Sulfur	ppm	ASTM D5185m		0	145	58
Acid Number (AN)	mg KOH/g	ASTM D8045	0.1	0.47	1.02	0.70
Visc @ 40°C	cSt	ASTM D445	87.69	70.9	70.5	96.3

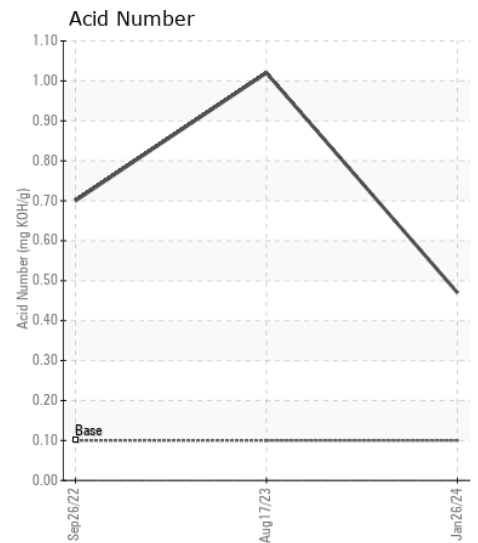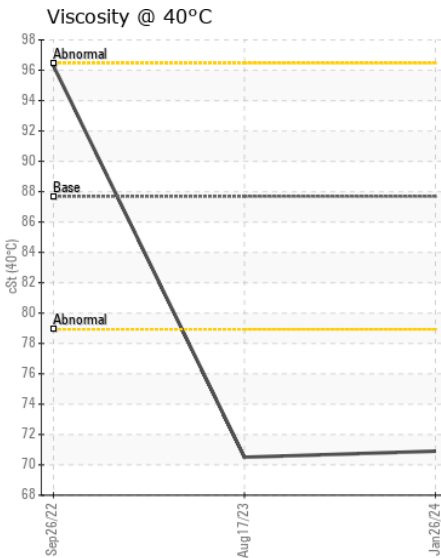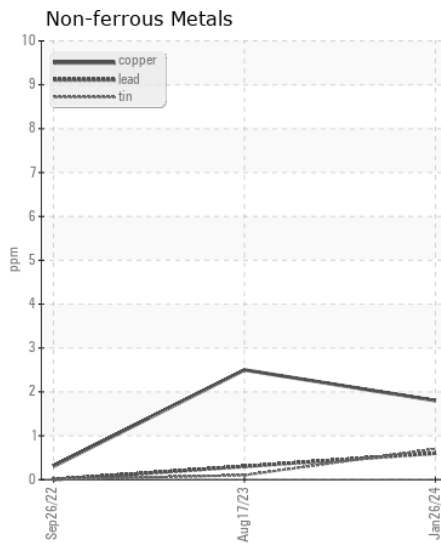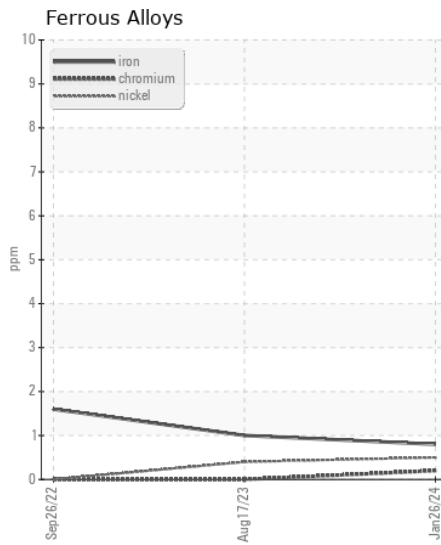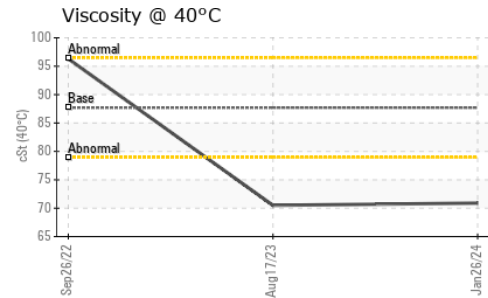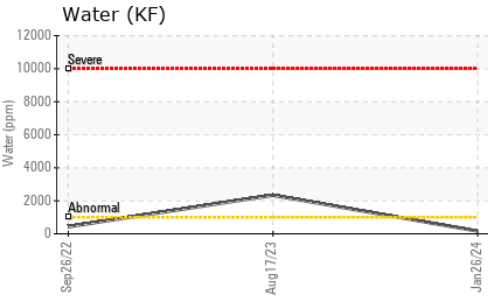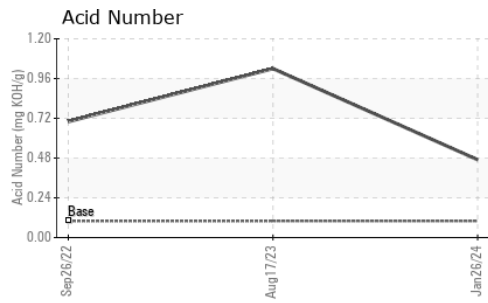

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : AN25482
Lab Number : 06097801
Unique Number : 10896031
Test Package : IND 2
Received : 22 Feb 2024
Tested : 25 Feb 2024
Diagnosed : 25 Feb 2024 - Doug Bogart

MATTEI COMPRESSORS--OEM
 9635 LIBERTY ROAD, SUITE E
 RANDALLSTOWN, MD
 US 21133
 Contact: MARTY WARD
 jward@matteicomp.com
 T: (410)521-7020
 F: (410)521-7024

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)