



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[05W45053]
 Machine Id
JOHN DEERE 410L 1T0410LXLMF398469
 Component
Rear Differential
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (16 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0190155	JR0166271	---
Sample Date		Client Info		20 Feb 2024	24 Mar 2023	---
Machine Age	hrs	Client Info		1449	944	---
Oil Age	hrs	Client Info		1449	944	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		N/A	None	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		78	56	---
Iron	ppm	ASTM D5185m	>500	189	137	---
Chromium	ppm	ASTM D5185m	>10	2	1	---
Nickel	ppm	ASTM D5185m	>10	2	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		<1	0	---
Aluminum	ppm	ASTM D5185m	>25	<1	2	---
Lead	ppm	ASTM D5185m	>25	<1	0	---
Copper	ppm	ASTM D5185m	>100	44	33	---
Tin	ppm	ASTM D5185m	>10	2	1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	MODER	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	16	12	---
Potassium	ppm	ASTM D5185m	>20	2	0	---
Water		WC Method	>.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	▲ MODER	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	8	---
Boron	ppm	ASTM D5185m	6	3	3	---
Barium	ppm	ASTM D5185m	0	10	2	---
Molybdenum	ppm	ASTM D5185m	0	1	<1	---
Manganese	ppm	ASTM D5185m		6	4	---
Magnesium	ppm	ASTM D5185m	145	92	96	---
Calcium	ppm	ASTM D5185m	3570	3188	3312	---
Phosphorus	ppm	ASTM D5185m	1290	978	961	---
Zinc	ppm	ASTM D5185m	1640	1106	1133	---
Sulfur	ppm	ASTM D5185m		4384	4007	---
Visc @ 40°C	cSt	ASTM D445	57.0	53.3	47.9	---

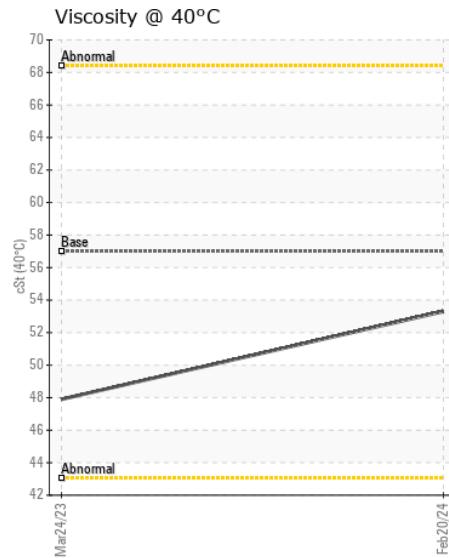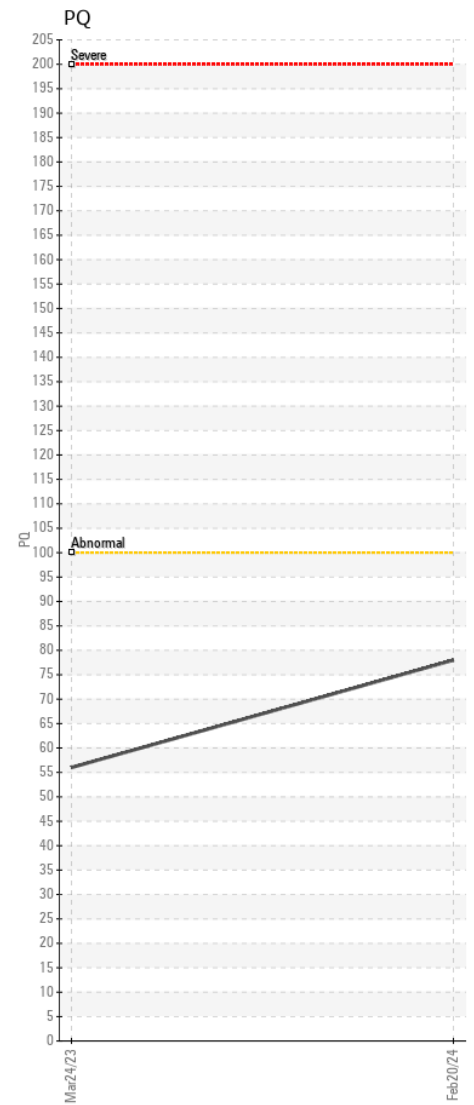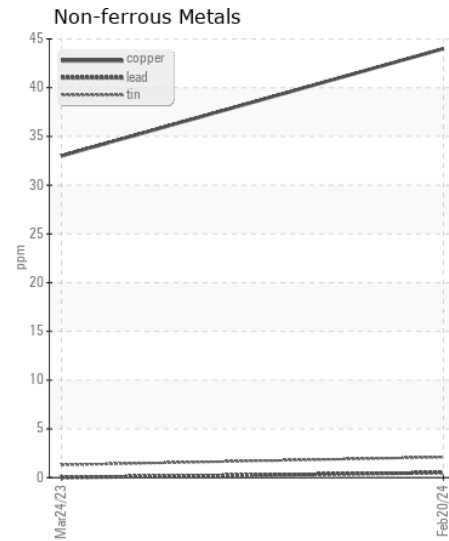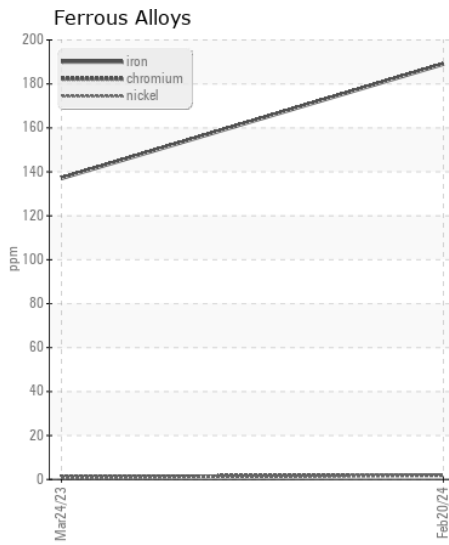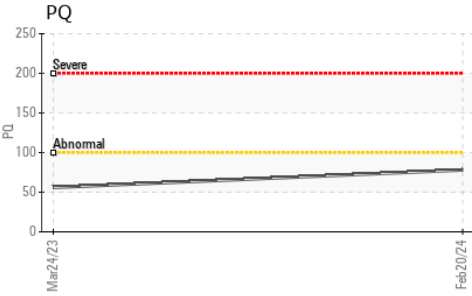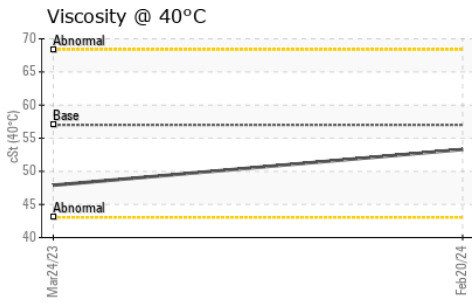

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0190155 **Received** : 22 Feb 2024
Lab Number : 06097940 **Tested** : 23 Feb 2024
Unique Number : 10896170 **Diagnosed** : 23 Feb 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

JRE - MANASSAS PARK
 9107 OWENS DRIVE
 MANASSAS PARK, VA
 US 20111

Contact: DON VEST
 dvest@jamesriverequipment.com
 T: (703)631-8500
 F: (703)631-4715

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)