



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
1FF245GXCMF802178

Component
Swing Drive

Fluid
JOHN DEERE GL-5 80W90 (6 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0203003	JR0195845	---
Sample Date		Client Info		21 Feb 2024	29 Dec 2023	---
Machine Age	hrs	Client Info		4071	3830	---
Oil Age	hrs	Client Info		4071	3830	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Not Changd	---
Filter Changed		Client Info		None	None	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		31	31	---
Iron	ppm	ASTM D5185m	>400	84	70	---
Chromium	ppm	ASTM D5185m	>10	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	<1	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		<1	0	---
Aluminum	ppm	ASTM D5185m	>25	<1	0	---
Lead	ppm	ASTM D5185m	>50	<1	0	---
Copper	ppm	ASTM D5185m	>200	1	0	---
Tin	ppm	ASTM D5185m	>10	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m	>50	10	9	---
Potassium	ppm	ASTM D5185m	>20	1	0	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m		0	0	---
Boron	ppm	ASTM D5185m		25	21	---
Barium	ppm	ASTM D5185m		7	0	---
Molybdenum	ppm	ASTM D5185m		2	0	---
Manganese	ppm	ASTM D5185m		2	1	---
Magnesium	ppm	ASTM D5185m		3	0	---
Calcium	ppm	ASTM D5185m		22	15	---
Phosphorus	ppm	ASTM D5185m		303	370	---
Zinc	ppm	ASTM D5185m		16	0	---
Sulfur	ppm	ASTM D5185m		16807	17143	---
Visc @ 40°C	cSt	ASTM D445		148	147	---

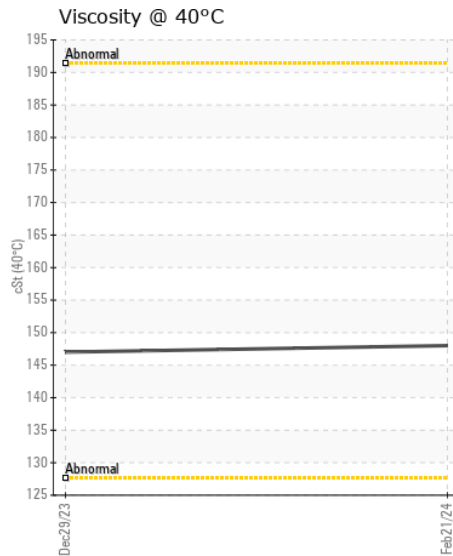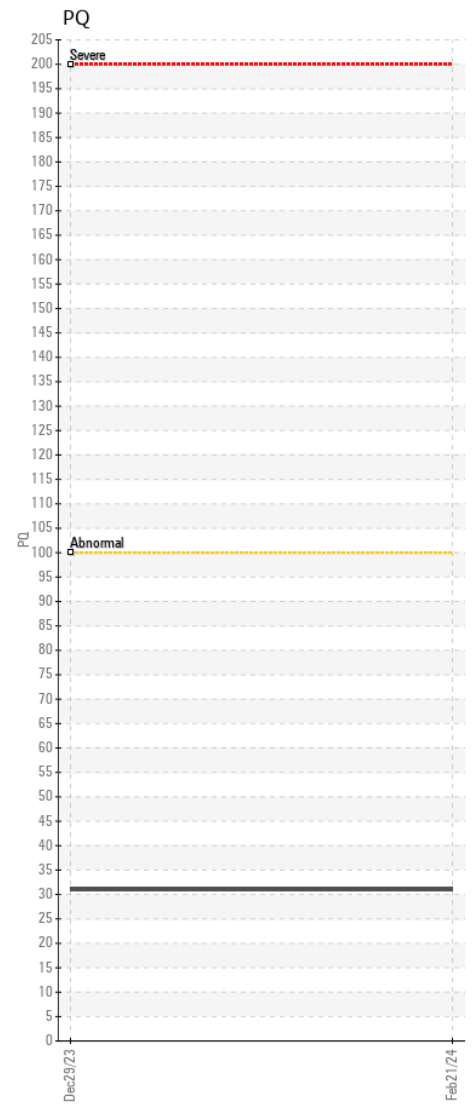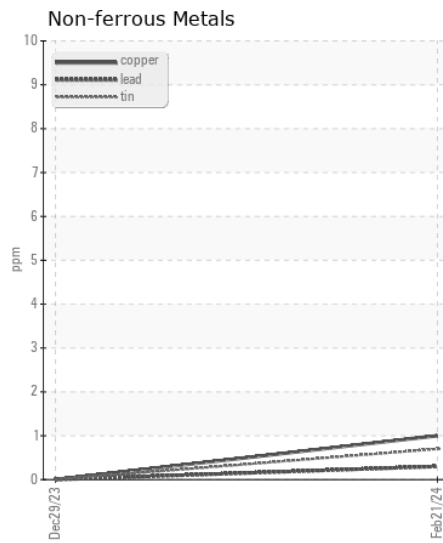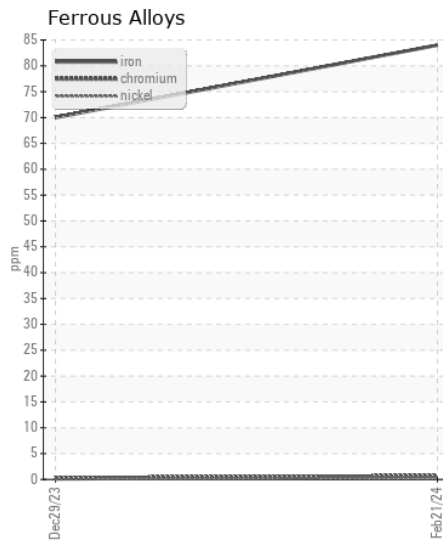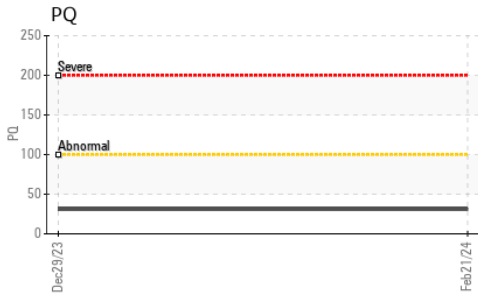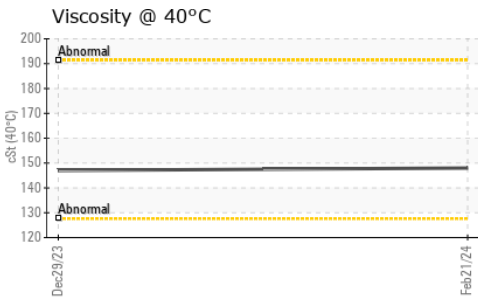

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0203003 **Received** : 22 Feb 2024
Lab Number : 06097961 **Tested** : 23 Feb 2024
Unique Number : 10896191 **Diagnosed** : 25 Feb 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - MANASSAS PARK
 9107 OWENS DRIVE
 MANASSAS PARK, VA
 US 20111

Contact: TECHNICIAN ACCOUNT
 catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (703)631-4715