



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Machine Id
VOLVO A30G C296862 (S/N A30G742386)
Component
Middle Differential
Fluid
JOHN DEERE GL-5 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0192864	JR0188112	JR0172116
Sample Date		Client Info		20 Feb 2024	26 Oct 2023	11 Jul 2023
Machine Age	hrs	Client Info		7009	569	6035
Oil Age	hrs	Client Info		7009	6035	6035
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Changed	Not Changed	N/A
Sample Status				ATTENTION	ATTENTION	ATTENTION

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		85	9	19
Iron	ppm	ASTM D5185m	>900	148	2	29
Chromium	ppm	ASTM D5185m	>20	2	<1	<1
Nickel	ppm	ASTM D5185m	>10	2	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>30	<1	2	9
Lead	ppm	ASTM D5185m	>50	<1	<1	0
Copper	ppm	ASTM D5185m	>150	9	<1	2
Tin	ppm	ASTM D5185m	>20	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m	>50	5	4	11
Potassium	ppm	ASTM D5185m	>20	1	2	1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The oil viscosity is lower than normal. Confirm oil type.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m		0	0	4
Boron	ppm	ASTM D5185m		271	<1	215
Barium	ppm	ASTM D5185m		5	4	2
Molybdenum	ppm	ASTM D5185m		2	<1	8
Manganese	ppm	ASTM D5185m		4	<1	<1
Magnesium	ppm	ASTM D5185m		<1	67	15
Calcium	ppm	ASTM D5185m		55	2246	59
Phosphorus	ppm	ASTM D5185m		2190	1012	2208
Zinc	ppm	ASTM D5185m		31	825	38
Sulfur	ppm	ASTM D5185m		29844	11309	29653
Visc @ 40°C	cSt	ASTM D445		▲ 51.4	▲ 82.5	▲ 49.9

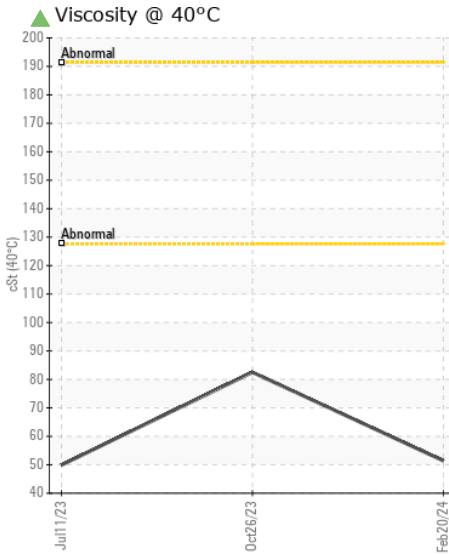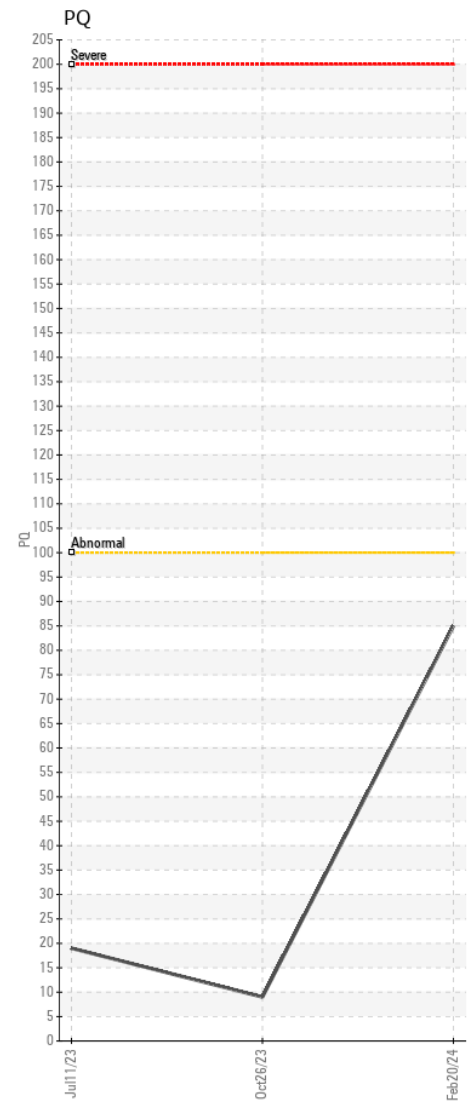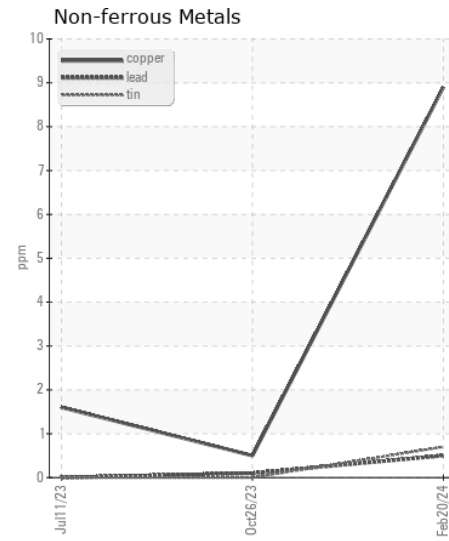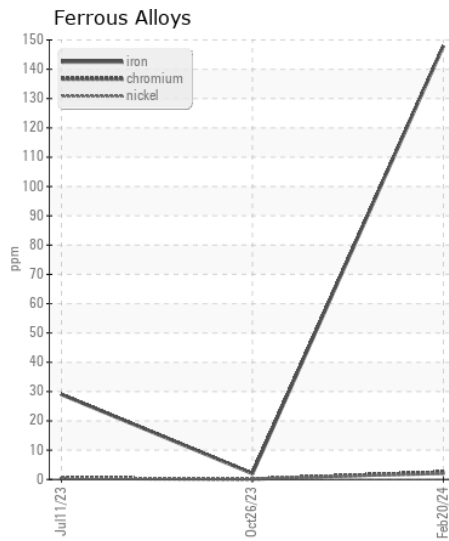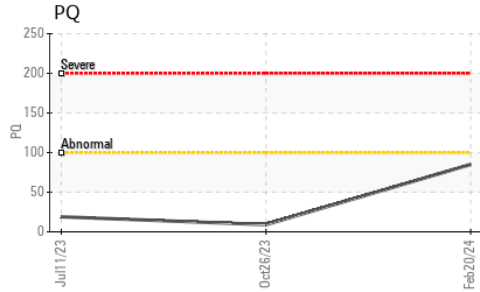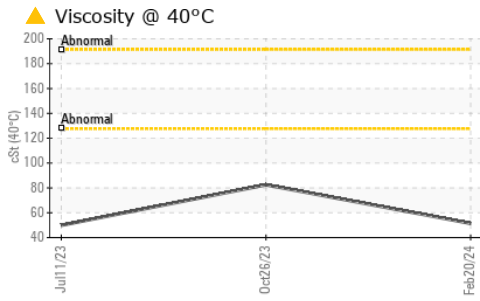

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0192864 **Received** : 22 Feb 2024
Lab Number : 06097981 **Tested** : 23 Feb 2024
Unique Number : 10896211 **Diagnosed** : 25 Feb 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com
 T: (704)597-0211
 F: (704)596-6198

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)