



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**Volvo VNR 1926707**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (38 QTS)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PCA0118709</b>	PCA0002454	---
Sample Date		Client Info		<b>14 Feb 2024</b>	11 Jun 2019	---
Machine Age	mls	Client Info		<b>364855</b>	23273	---
Oil Age	mls	Client Info		<b>41509</b>	23273	---
Filter Age	mls	Client Info		<b>22729</b>	23273	---
Oil Changed		Client Info		<b>Changed</b>	Diff Oil	---
Filter Changed		Client Info		<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	ABNORMAL	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>17</b>	37	---
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	1	---
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	1	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	1	---
Aluminum	ppm	ASTM D5185m	>25	<b>3</b>	▲ 20	---
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>330	<b>3</b>	▲ 462	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>4</b>	▲ 33	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	▲ 61	---
Fuel		WC Method	>6.0	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.1</b>	9	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.5</b>	23.6	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>8</b>	6	---
Boron	ppm	ASTM D5185m	2	<b>3</b>	25	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	<1	---
Molybdenum	ppm	ASTM D5185m	50	<b>53</b>	38	---
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	5	---
Magnesium	ppm	ASTM D5185m	950	<b>829</b>	538	---
Calcium	ppm	ASTM D5185m	1050	<b>990</b>	1697	---
Phosphorus	ppm	ASTM D5185m	995	<b>945</b>	860	---
Zinc	ppm	ASTM D5185m	1180	<b>1145</b>	1040	---
Sulfur	ppm	ASTM D5185m	2600	<b>2706</b>	2276	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.2</b>	22.2	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>7.2</b>	8.9	---
Visc @ 100°C	cSt	ASTM D445	12.00	<b>10.9</b>	11.5	---

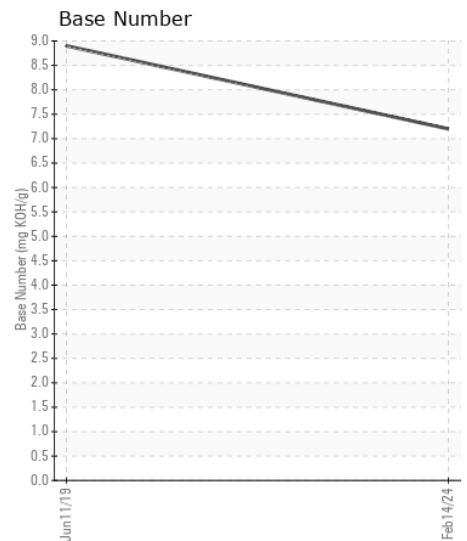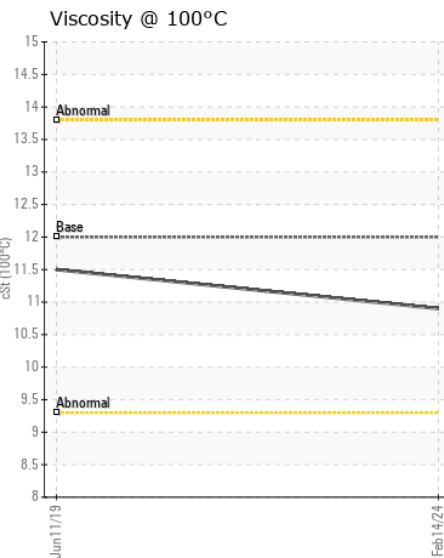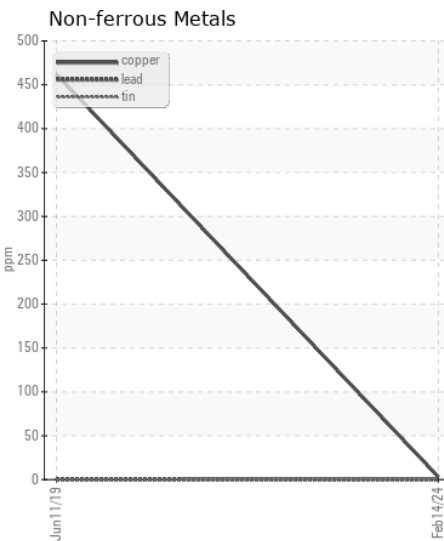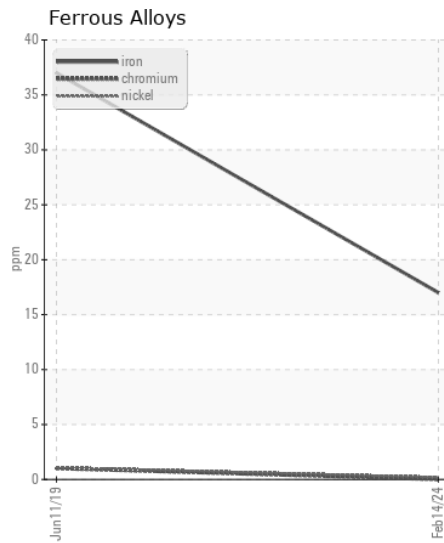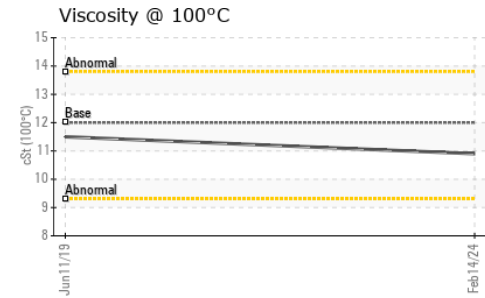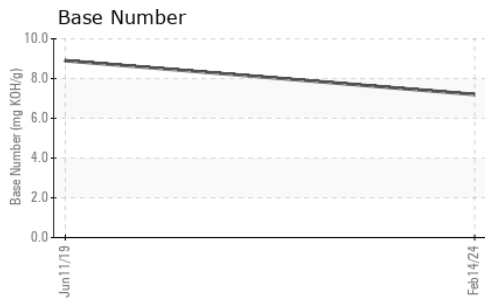

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0118709  
**Lab Number** : 06098125  
**Unique Number** : 10896355  
**Test Package** : FLEET

**Received** : 23 Feb 2024  
**Tested** : 25 Feb 2024  
**Diagnosed** : 25 Feb 2024 - Wes Davis

**PERDUE FARMS - ACCOMAC**  
 22520 LANKFORD HWY  
 ACCOMAC, VA  
 US 23301

Contact: PEGGY KIMES  
 peggy.kimes@perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (757)787-5304  
 F: (757)787-5208