



PacLease

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
859-1742
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0017727	RPL0016208	RPL0013175
Sample Date		Client Info		14 Feb 2024	20 Nov 2023	24 Aug 2023
Machine Age	mls	Client Info		246188	236095	222705
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Filter Changed		Client Info		Not Changd	Changed	Changed
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	16	49	37
Chromium	ppm	ASTM D5185m	>20	<1	3	2
Nickel	ppm	ASTM D5185m	>4	<1	0	0
Titanium	ppm	ASTM D5185m		<1	3	3
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	6	5	6
Lead	ppm	ASTM D5185m	>40	2	10	10
Copper	ppm	ASTM D5185m	>330	<1	1	1
Tin	ppm	ASTM D5185m	>15	<1	2	1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	8	8
Potassium	ppm	ASTM D5185m	>20	16	11	9
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.5	1.2	0.8
Nitration	Abs/cm	*ASTM D7624	>20	11.6	16.9	13.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.4	31.8	25.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	4	4
Boron	ppm	ASTM D5185m	0	51	31	34
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	107	34	43
Manganese	ppm	ASTM D5185m		<1	1	<1
Magnesium	ppm	ASTM D5185m	0	628	541	573
Calcium	ppm	ASTM D5185m		1178	1548	1834
Phosphorus	ppm	ASTM D5185m		675	772	791
Zinc	ppm	ASTM D5185m		798	940	997
Sulfur	ppm	ASTM D5185m		2698	2276	2873
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.2	40.2	29.7
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	5.6	▲ 3.8	5.0
Visc @ 100°C	cSt	ASTM D445	14	13.2	15.8	14.0

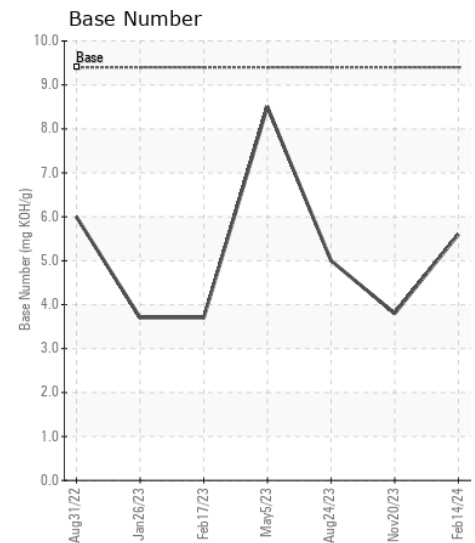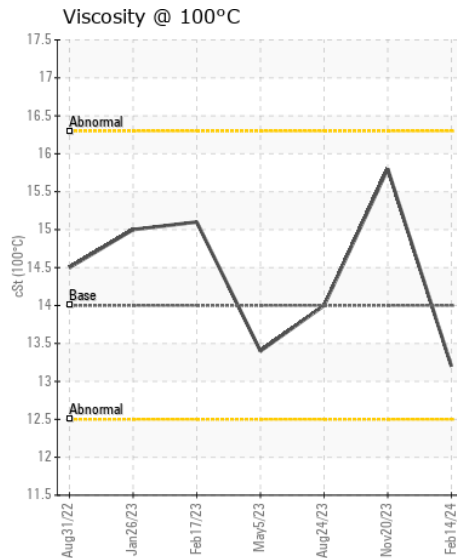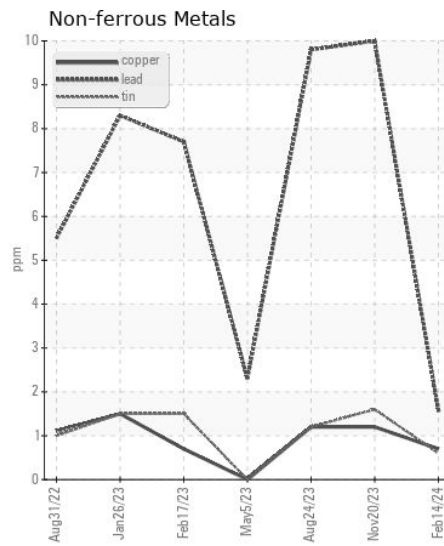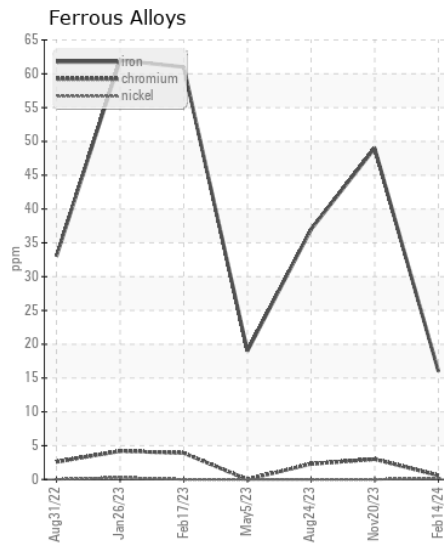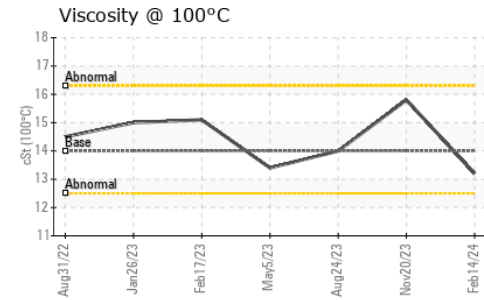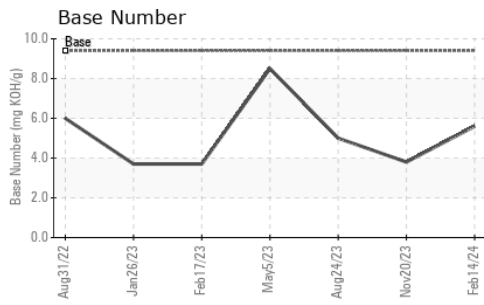

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0017727
Lab Number : 06098168
Unique Number : 10896398
Test Package : FLEET

Received : 23 Feb 2024
Tested : 25 Feb 2024
Diagnosed : 25 Feb 2024 - Wes Davis

RTL PACLEASE - 7051 - Las Vegas
 4150 Arctic Spring Ave
 North Las Vegas, NV
 US 89115
 Contact: Rudy Trevizo
 TrevizoR@RushEnterprises.Com
 T: (702)208-7164
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)