



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
MARK C
Machine Id
[MARK C] 004 543154-4
Component
Port Reduction Gear
Fluid
CHEVRON URSA SUPER PLUS 40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW06098606	MW0061700	MW0061655
Sample Date		Client Info		10 Jan 2024	02 Dec 2023	03 Nov 2023
Machine Age	hrs	Client Info		87657	86732	86009
Oil Age	hrs	Client Info		1657	732	34
Filter Age	hrs	Client Info		0	732	34
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	1	2	<1
Chromium	ppm	ASTM D5185m	>10	0	<1	0
Nickel	ppm	ASTM D5185m	>10	<1	0	<1
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m		1	2	2
Lead	ppm	ASTM D5185m		0	<1	<1
Copper	ppm	ASTM D5185m		<1	2	0
Tin	ppm	ASTM D5185m		<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		4	4	4
Potassium	ppm	ASTM D5185m	>20	<1	2	2
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	0	0
Boron	ppm	ASTM D5185m		285	340	327
Barium	ppm	ASTM D5185m		0	8	0
Molybdenum	ppm	ASTM D5185m		29	34	32
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		9	8	11
Calcium	ppm	ASTM D5185m		2315	2599	2505
Phosphorus	ppm	ASTM D5185m	1000	650	687	760
Zinc	ppm	ASTM D5185m	1090	757	809	862
Sulfur	ppm	ASTM D5185m		2823	3298	3414
Acid Number (AN)	mg KOH/g	ASTM D8045		1.11	1.66	0.43
Visc @ 40°C	cSt	ASTM D445	143	132	132	132

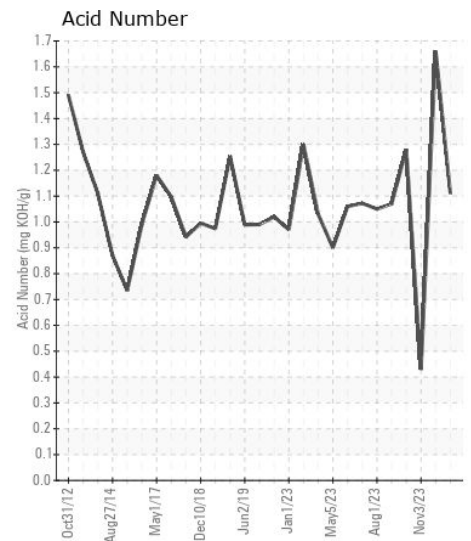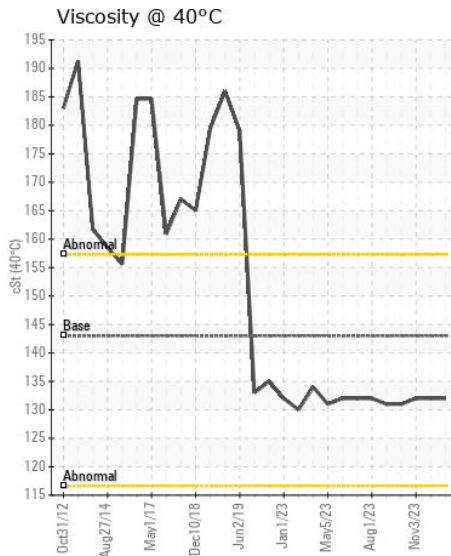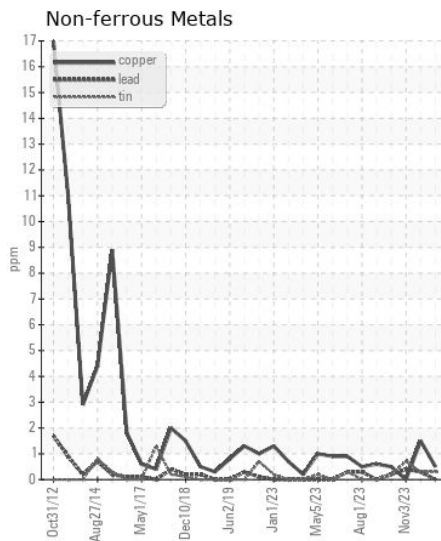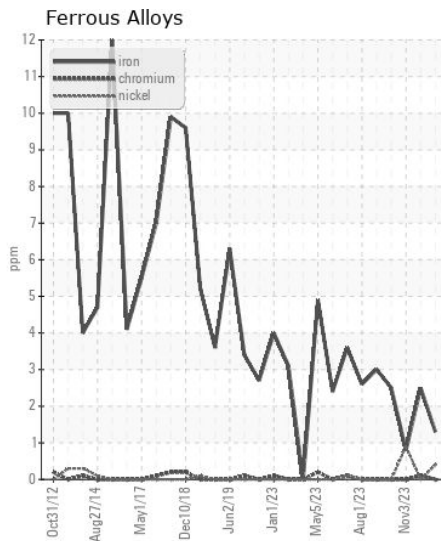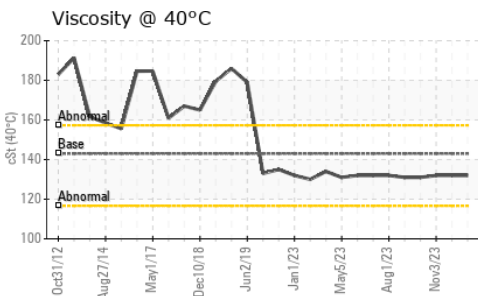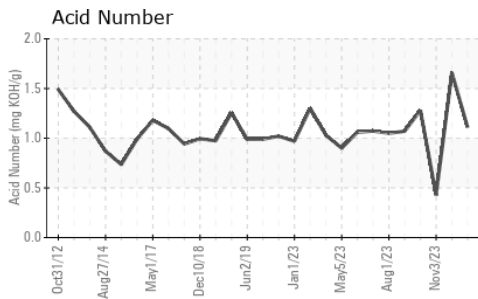

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW06098606
Lab Number : 06098606
Unique Number : 10896836
Test Package : MAR 2

Received : 23 Feb 2024
Tested : 26 Feb 2024
Diagnosed : 26 Feb 2024 - Wes Davis

INGRAM BARGE
 900 S 3RD ST
 PADUCAH, KY
 US 42003

Contact: TONY HUCKABEE
 tony.huckabee@ingrambarge.com
 T: (270)415-4467
 F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)