



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
427
Component
Diesel Engine
Fluid
PETRO CANADA DURON HP 15W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RW0005142	RW0002433	---
Sample Date		Client Info		19 Feb 2024	09 Sep 2021	---
Machine Age	hrs	Client Info		1182	1032	---
Oil Age	hrs	Client Info		150	250	---
Filter Age	hrs	Client Info		150	250	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	17	9	---
Chromium	ppm	ASTM D5185m	>20	3	1	---
Nickel	ppm	ASTM D5185m	>4	<1	0	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	<1	---
Aluminum	ppm	ASTM D5185m	>20	5	2	---
Lead	ppm	ASTM D5185m	>40	0	<1	---
Copper	ppm	ASTM D5185m	>330	<1	<1	---
Tin	ppm	ASTM D5185m	>15	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	12	6	---
Potassium	ppm	ASTM D5185m	>20	1	0	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.2	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	6.4	7	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.2	18	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	2	---
Boron	ppm	ASTM D5185m		5	21	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		55	58	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		940	878	---
Calcium	ppm	ASTM D5185m		977	1137	---
Phosphorus	ppm	ASTM D5185m		982	948	---
Zinc	ppm	ASTM D5185m		1228	1130	---
Sulfur	ppm	ASTM D5185m		2969	2692	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.2	14.1	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	10.14	9.24	---
Visc @ 100°C	cSt	ASTM D445	15.6	13.5	13.1	---

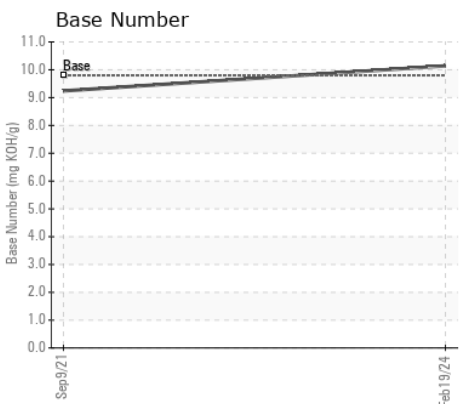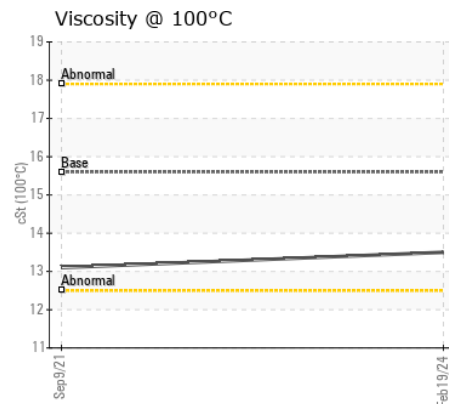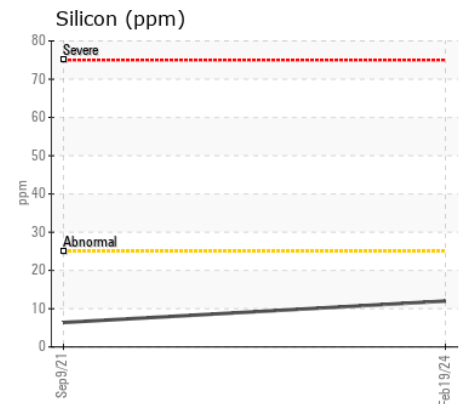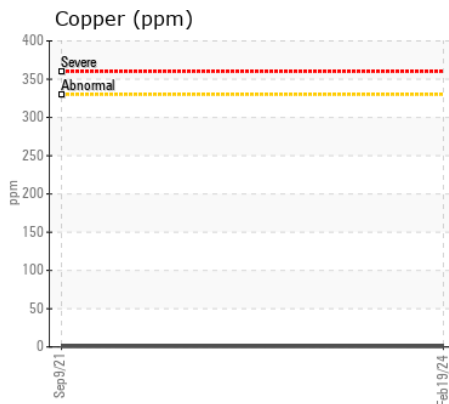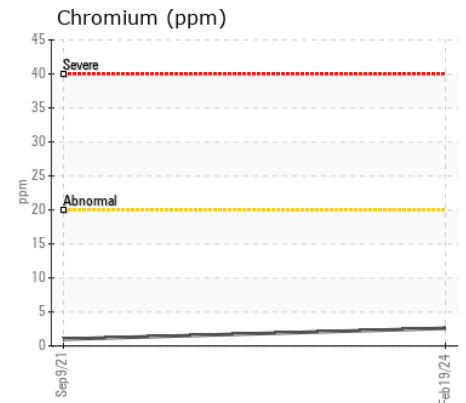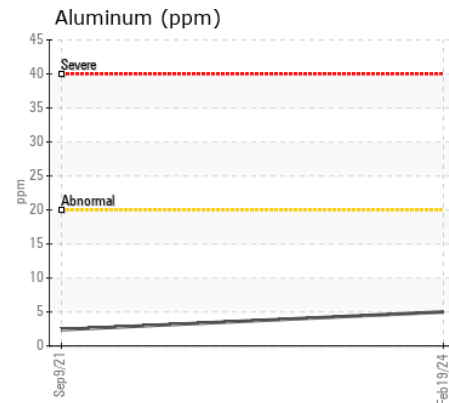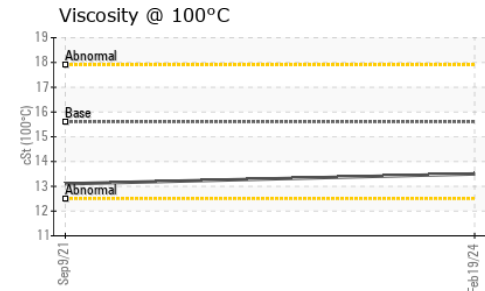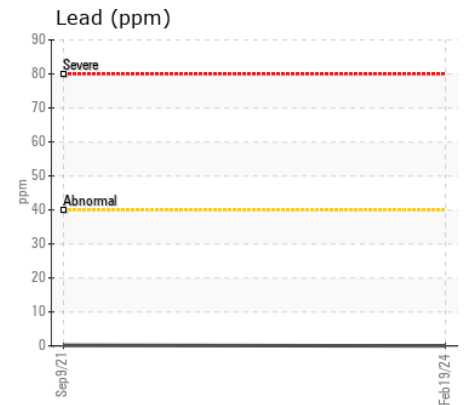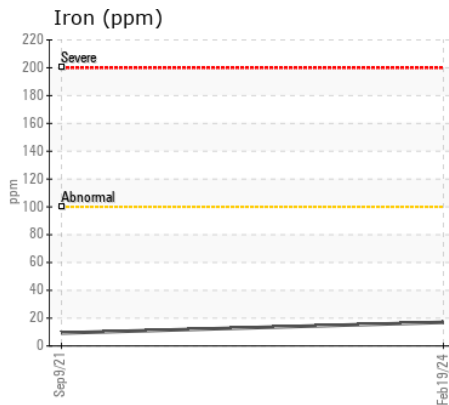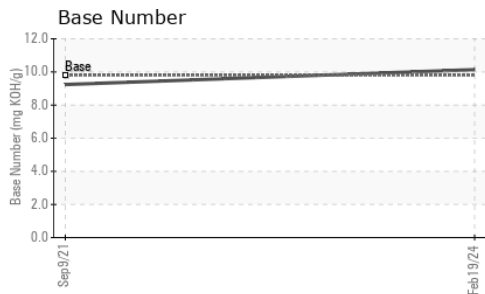

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RW0005142 **Received** : 23 Feb 2024
Lab Number : 06098641 **Tested** : 26 Feb 2024
Unique Number : 10896871 **Diagnosed** : 26 Feb 2024 - Wes Davis
Test Package : MOB 2

NEWKIRK ELECTRIC
 1875 ROBERTS ST.
 MUSKEGON, MI
 US 49442
 Contact: ERIC KING
 ewking@newkirk-electric.com
 T: (231)206-6131
 F: (231)724-4090

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)