



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 843L 1DW843LBKMF710970

Component
Front Differential

Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WE0006267	WE0000296	---
Sample Date		Client Info		22 Feb 2024	08 Aug 2021	---
Machine Age	hrs	Client Info		5817	539	---
Oil Age	hrs	Client Info		0	539	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	Not Changd	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		11	---	---
Iron	ppm	ASTM D5185m	>500	0	260	---
Chromium	ppm	ASTM D5185m	>10	0	2	---
Nickel	ppm	ASTM D5185m	>10	<1	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	1	2	---
Lead	ppm	ASTM D5185m	>25	0	4	---
Copper	ppm	ASTM D5185m	>100	0	13	---
Tin	ppm	ASTM D5185m	>10	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION






There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	5	11	---
Potassium	ppm	ASTM D5185m	>20	0	2	---
Water		WC Method	>.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	LIGHT	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	3	---
Boron	ppm	ASTM D5185m	6	<1	5	---
Barium	ppm	ASTM D5185m	0	0	3	---
Molybdenum	ppm	ASTM D5185m	0	0	<1	---
Manganese	ppm	ASTM D5185m		<1	6	---
Magnesium	ppm	ASTM D5185m	145	107	114	---
Calcium	ppm	ASTM D5185m	3570	3318	3948	---
Phosphorus	ppm	ASTM D5185m	1290	1001	1119	---
Zinc	ppm	ASTM D5185m	1640	1265	1279	---
Sulfur	ppm	ASTM D5185m		3477	3756	---
Visc @ 40°C	cSt	ASTM D445	57.0	60.7	55.0	---

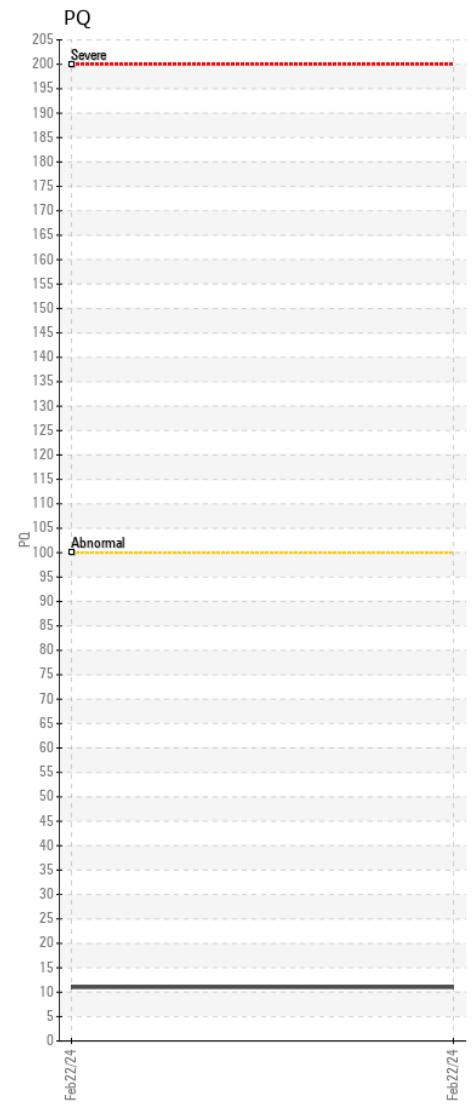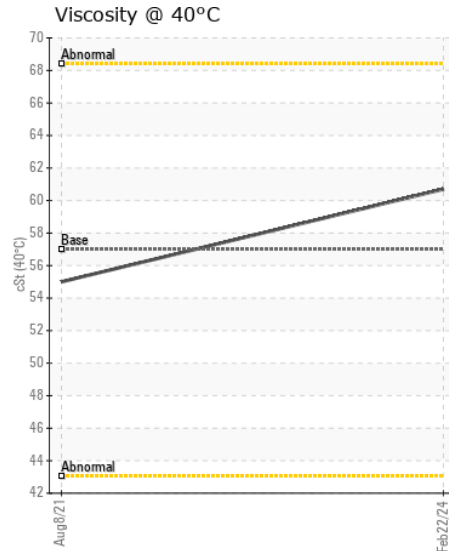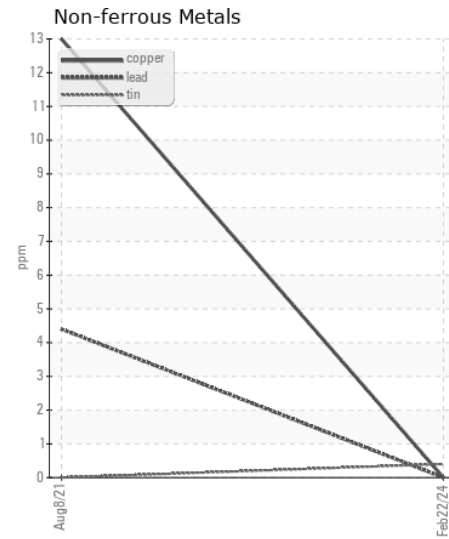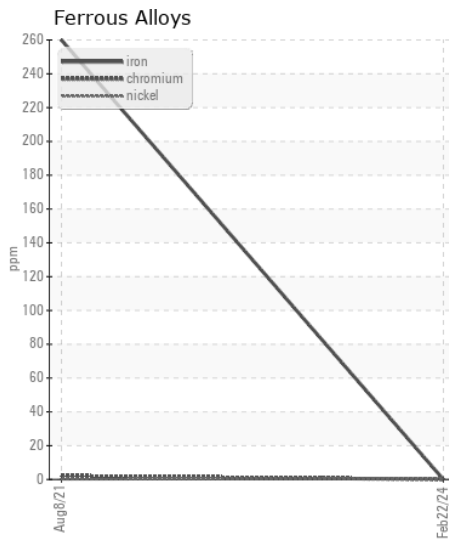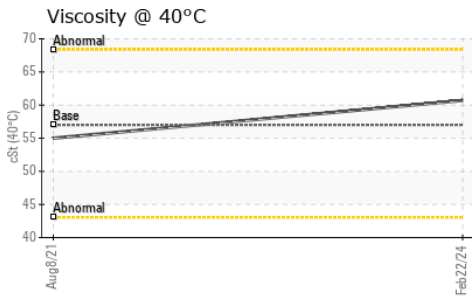

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WE0006267 **Received** : 23 Feb 2024
Lab Number : 06098670 **Tested** : 26 Feb 2024
Unique Number : 10896900 **Diagnosed** : 26 Feb 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

WARRIOR TRACTOR AND EQUIPMENT - NORTHPORT
 P.O. BOX 412
 NORTHPORT, AL
 US 35476
 Contact: SCOTT GOOD
 sgood@warriortractor.com
 T: (205)339-0300
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)