



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 460P 1DW460PAPPFB06219

Component
Front Differential

Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WE0006351	WE0005831	WE0005095
Sample Date		Client Info		21 Feb 2024	10 Nov 2023	03 Aug 2023
Machine Age	hrs	Client Info		1471	1037	540
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Not Changd	N/A
Filter Changed		Client Info		N/A	Not Changd	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		15	16	18
Iron	ppm	ASTM D5185m	>500	26	28	21
Chromium	ppm	ASTM D5185m	>10	0	0	<1
Nickel	ppm	ASTM D5185m	>10	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>25	2	<1	3
Lead	ppm	ASTM D5185m	>25	6	15	11
Copper	ppm	ASTM D5185m	>100	51	7	8
Tin	ppm	ASTM D5185m	>10	4	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	4	4	5
Potassium	ppm	ASTM D5185m	>20	<1	0	2
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	LIGHT
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	5	4
Boron	ppm	ASTM D5185m	6	2	<1	<1
Barium	ppm	ASTM D5185m	0	3	<1	0
Molybdenum	ppm	ASTM D5185m	0	0	0	<1
Manganese	ppm	ASTM D5185m		2	2	2
Magnesium	ppm	ASTM D5185m	145	103	100	103
Calcium	ppm	ASTM D5185m	3570	3450	3490	3878
Phosphorus	ppm	ASTM D5185m	1290	1002	1058	1109
Zinc	ppm	ASTM D5185m	1640	1252	1256	1353
Sulfur	ppm	ASTM D5185m		3438	3667	4296
Visc @ 40°C	cSt	ASTM D445	57.0	54.0	53.7	54.7

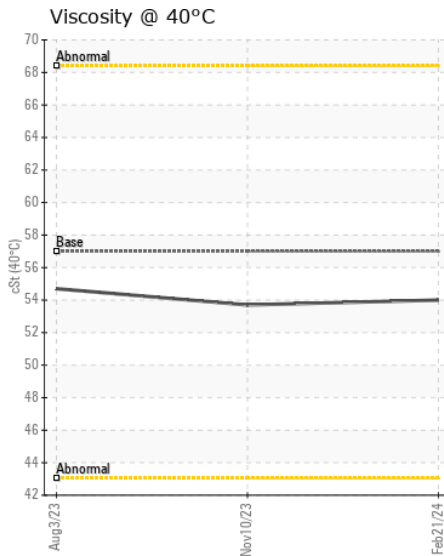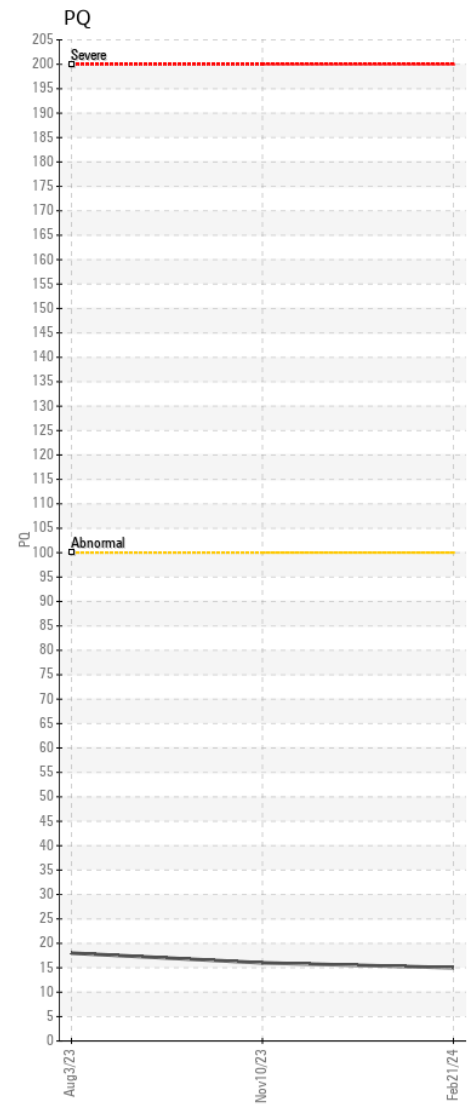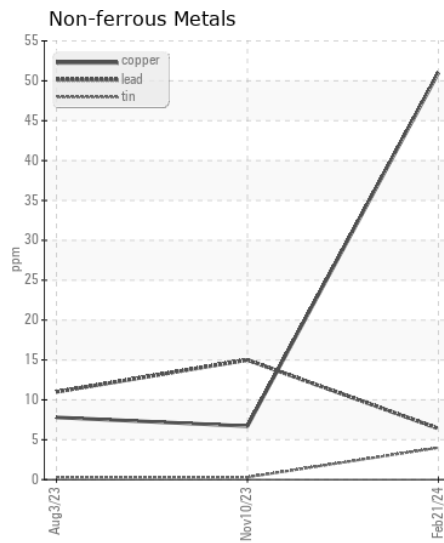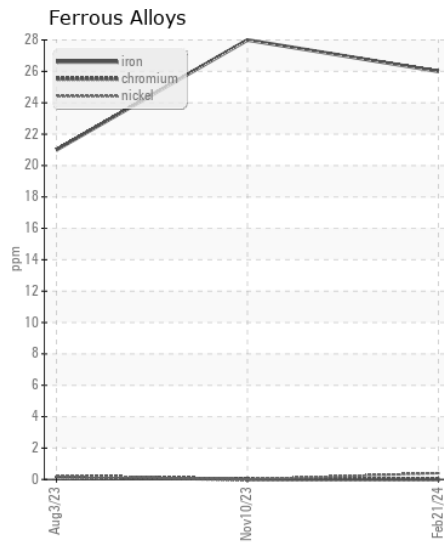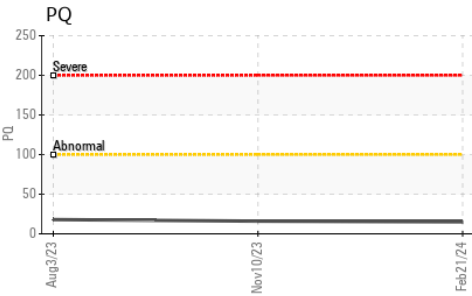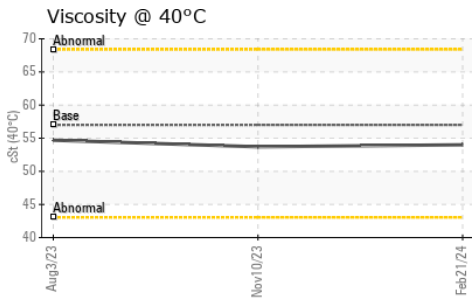

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WE0006351 **Received** : 23 Feb 2024
Lab Number : 06098674 **Tested** : 26 Feb 2024
Unique Number : 10896904 **Diagnosed** : 26 Feb 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

WARRIOR TRACTOR AND EQUIPMENT - NORTHPORT
 P.O. BOX 412
 NORTHPORT, AL
 US 35476
 Contact: CRAIG ANDOE
 serve01@warriortractor.com
 T: (205)339-0300
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)