



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area  
**[660752 NORTHSTAR BLU]**  
 Machine Id  
**SENNEBOGEN 850 3139**  
 Component  
**Rear Left Final Drive**  
 Fluid  
**VOLVO PREMIUM GEAR OIL 80W-90 GL-5 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP445857	VCP416285	VCP382919
Sample Date		Client Info		13 Feb 2024	26 Jul 2023	06 Feb 2023
Machine Age	hrs	Client Info		3118	1921	952
Oil Age	hrs	Client Info		1118	1000	500
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	46	29	16
Chromium	ppm	ASTM D5185m	>10	0	0	<1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>25	0	<1	0
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	2	5	2
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

**CONTAMINATION**










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	2	4	3
Potassium	ppm	ASTM D5185m	>20	0	<1	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	0	<1
Boron	ppm	ASTM D5185m	379	10	59	135
Barium	ppm	ASTM D5185m	0.0	1	6	46
Molybdenum	ppm	ASTM D5185m	0.8	0	0	0
Manganese	ppm	ASTM D5185m	0.0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	31	0	0	<1
Calcium	ppm	ASTM D5185m	38	8	0	4
Phosphorus	ppm	ASTM D5185m	1077	473	1809	1734
Zinc	ppm	ASTM D5185m	46	2	4	4
Sulfur	ppm	ASTM D5185m	23526	16534	18403	18054
Visc @ 40°C	cSt	ASTM D445	139	132	152	152

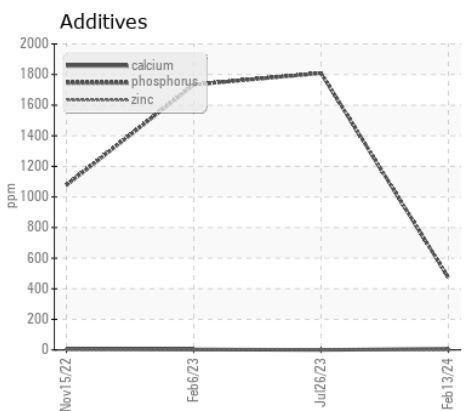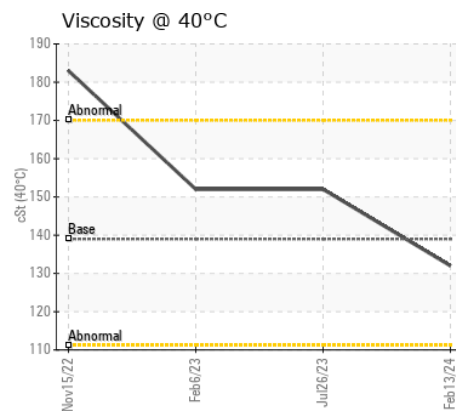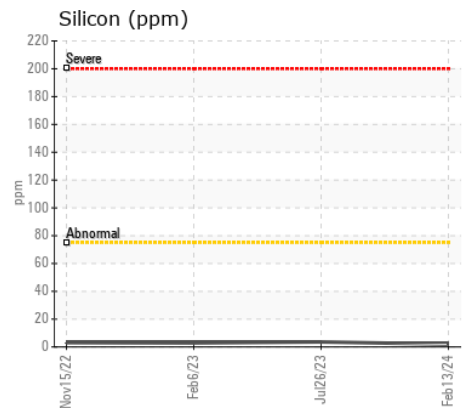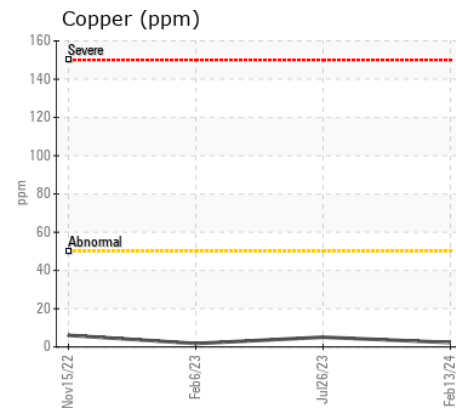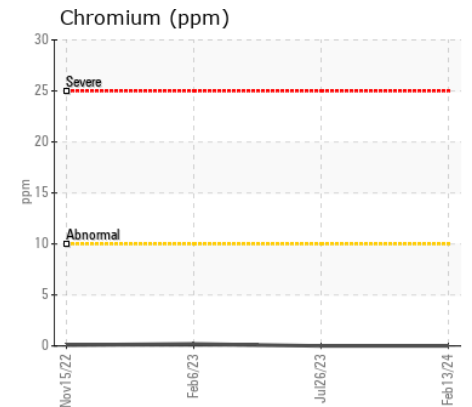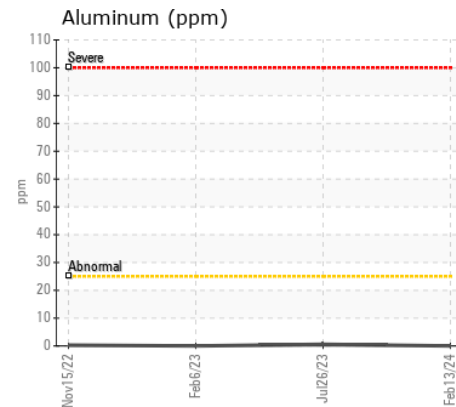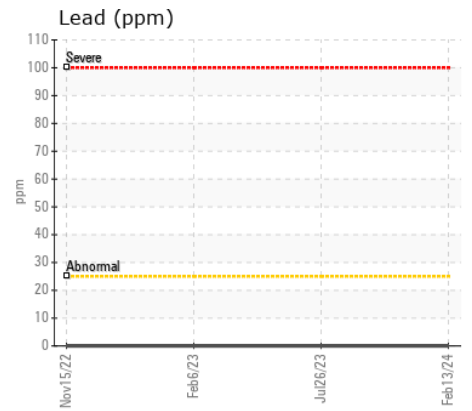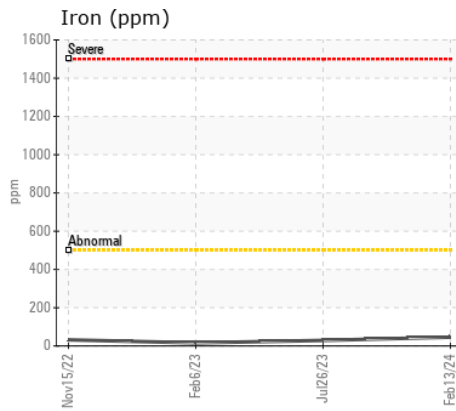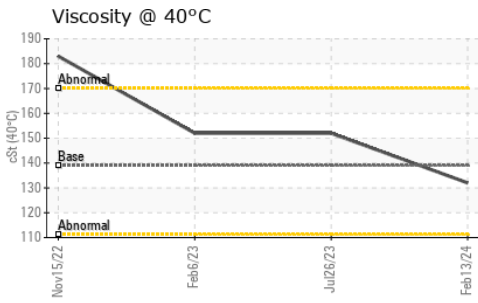

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP445857  
**Lab Number** : 06098709  
**Unique Number** : 10896939  
**Test Package** : MOB 1

**Received** : 23 Feb 2024  
**Tested** : 26 Feb 2024  
**Diagnosed** : 26 Feb 2024 - Sean Felton

**ALTA EQUIPMENT COMPANY - METRO WEST**  
 56195 PONTIAC TRAIL  
 NEW HUDSON, MI  
 US 48165  
 Contact: PAUL CONZ  
 paul.conz@altg.com  
 T: (313)348-8861  
 F: (248)356-2029

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)