



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area  
**[660061 GLE]**  
 Machine Id  
**SENNEBOGEN 830 830.0.2758**  
 Component  
**Rear Right Final Drive**  
 Fluid  
**VOLVO PREMIUM GEAR OIL 80W-90 GL-5 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP445876	VCP406429	VCP341342
Sample Date		Client Info		19 Feb 2024	08 Feb 2023	08 Jun 2022
Machine Age	hrs	Client Info		8236	6106	4965
Oil Age	hrs	Client Info		1000	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	116	46	25
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	<1	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	0	<1
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	2	1	<1
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

**CONTAMINATION**










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	4	3	3
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	3	1
Boron	ppm	ASTM D5185m	379	72	123	145
Barium	ppm	ASTM D5185m	0.0	<1	0	0
Molybdenum	ppm	ASTM D5185m	0.8	<1	<1	0
Manganese	ppm	ASTM D5185m	0.0	1	<1	<1
Magnesium	ppm	ASTM D5185m	31	7	5	0
Calcium	ppm	ASTM D5185m	38	30	34	37
Phosphorus	ppm	ASTM D5185m	1077	1174	1543	2018
Zinc	ppm	ASTM D5185m	46	16	18	15
Sulfur	ppm	ASTM D5185m	23526	18430	22423	21627
Visc @ 40°C	cSt	ASTM D445	139	137	141	144

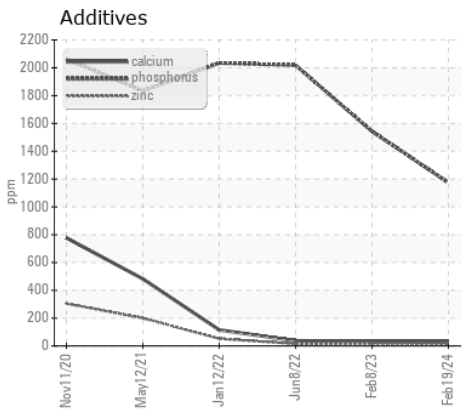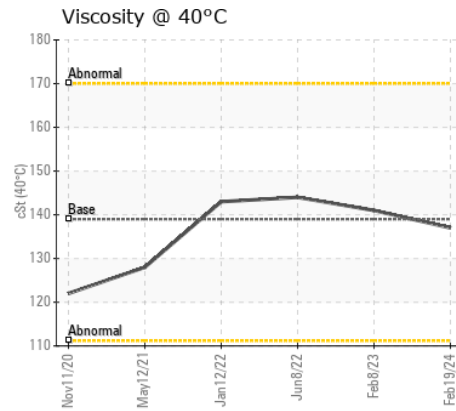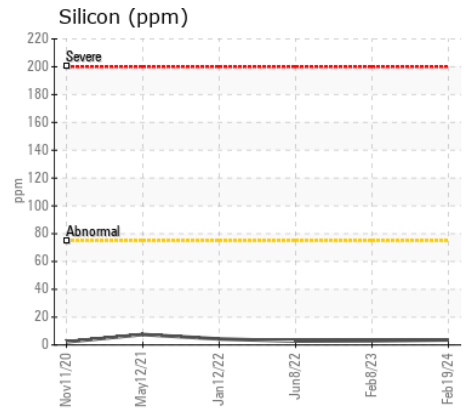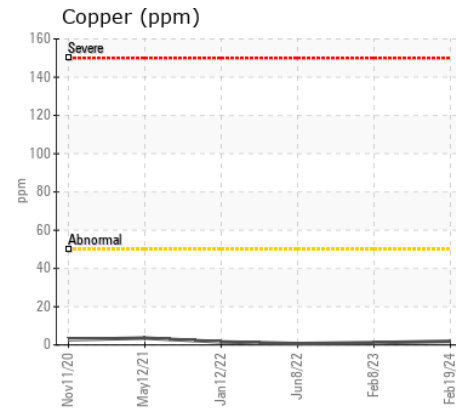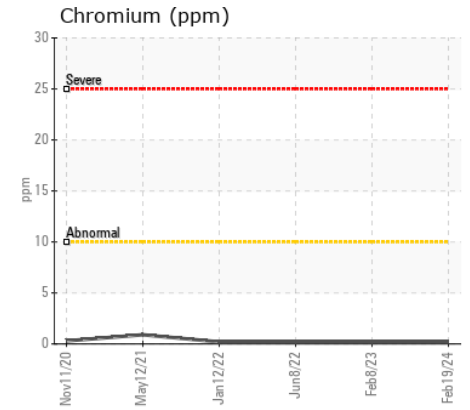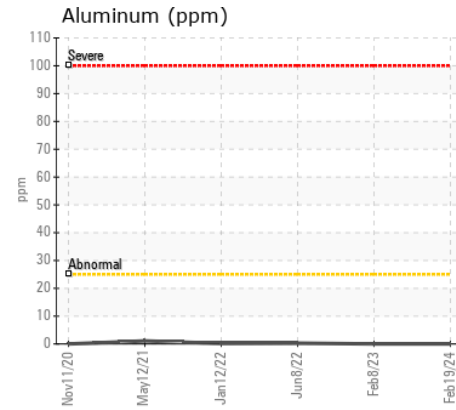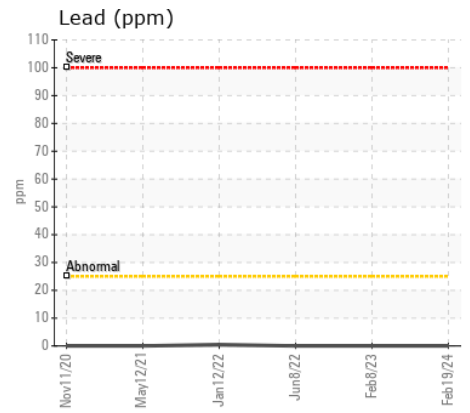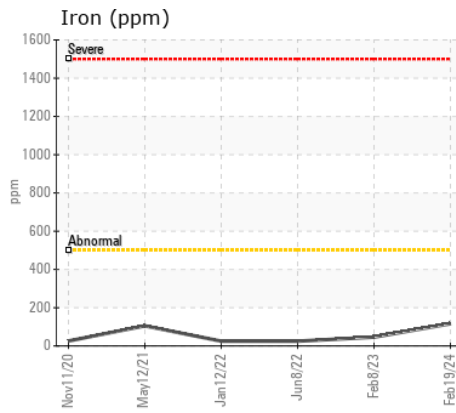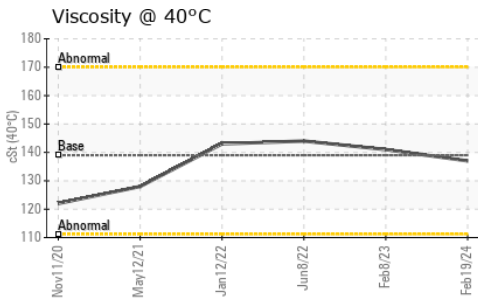

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP445876  
**Lab Number** : 06098714  
**Unique Number** : 10896944  
**Test Package** : MOB 1

**Received** : 23 Feb 2024  
**Tested** : 26 Feb 2024  
**Diagnosed** : 26 Feb 2024 - Wes Davis

**ALTA EQUIPMENT COMPANY - METRO WEST**  
 56195 PONTIAC TRAIL  
 NEW HUDSON, MI  
 US 48165  
 Contact: PAUL CONZ  
 paul.conz@altg.com  
 T: (313)348-8861  
 F: (248)356-2029

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)