



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[673135]

Machine Id

SENNEBOGEN 840 840.0.2369

Component

Rear Right Final Drive

Fluid

VOLVO PREMIUM GEAR OIL 80W-90 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP445849	VCP424549	---
Sample Date		Client Info		10 Feb 2024	10 Aug 2023	---
Machine Age	hrs	Client Info		2322	1119	---
Oil Age	hrs	Client Info		1322	1119	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Not Changed	Not Changed	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	22	28	---
Chromium	ppm	ASTM D5185m	>10	0	0	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	0	<1	---
Lead	ppm	ASTM D5185m	>25	0	0	---
Copper	ppm	ASTM D5185m	>50	4	13	---
Tin	ppm	ASTM D5185m	>10	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	3	7	---
Potassium	ppm	ASTM D5185m	>20	0	<1	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	▲ MODER	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	4	---
Boron	ppm	ASTM D5185m	379	16	157	---
Barium	ppm	ASTM D5185m	0.0	2	2	---
Molybdenum	ppm	ASTM D5185m	0.8	0	0	---
Manganese	ppm	ASTM D5185m	0.0	<1	1	---
Magnesium	ppm	ASTM D5185m	31	0	0	---
Calcium	ppm	ASTM D5185m	38	2	8	---
Phosphorus	ppm	ASTM D5185m	1077	503	1748	---
Zinc	ppm	ASTM D5185m	46	0	3	---
Sulfur	ppm	ASTM D5185m	23526	17482	25056	---
Visc @ 40°C	cSt	ASTM D445	139	132	141	---

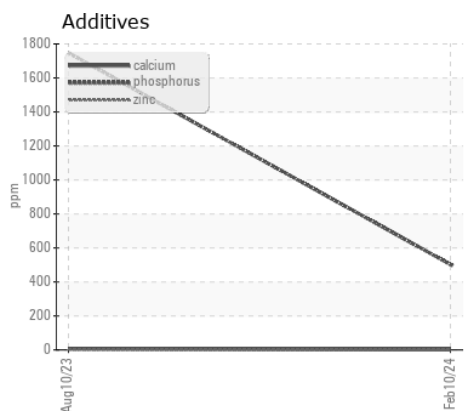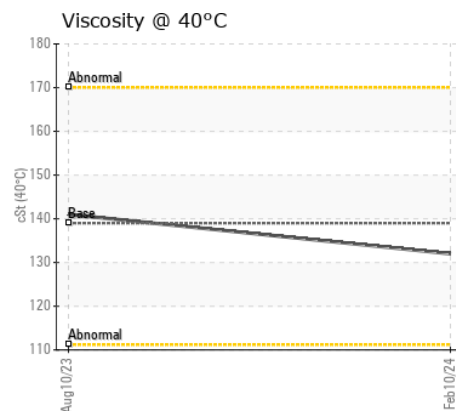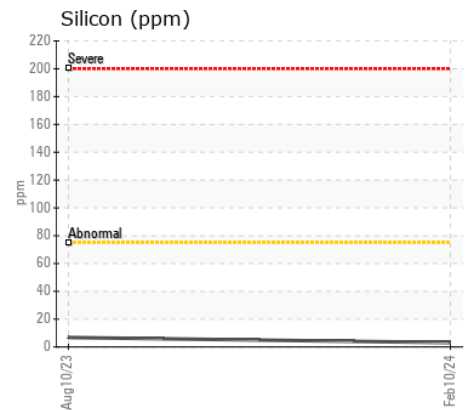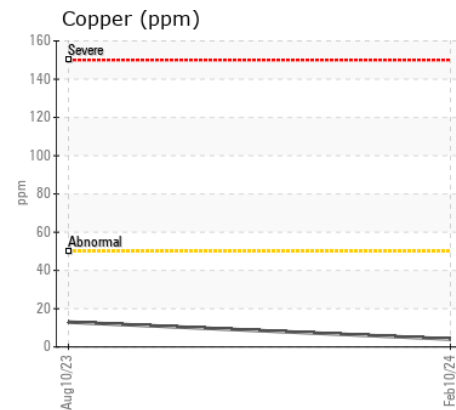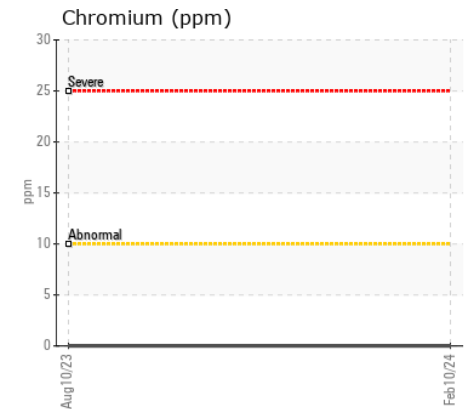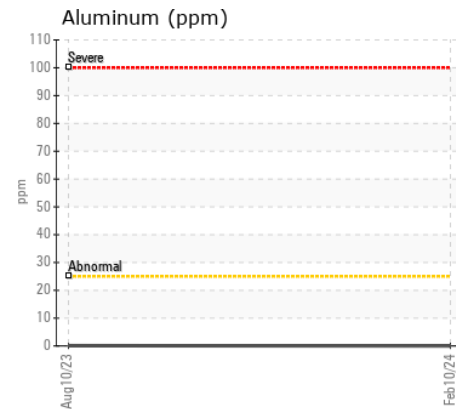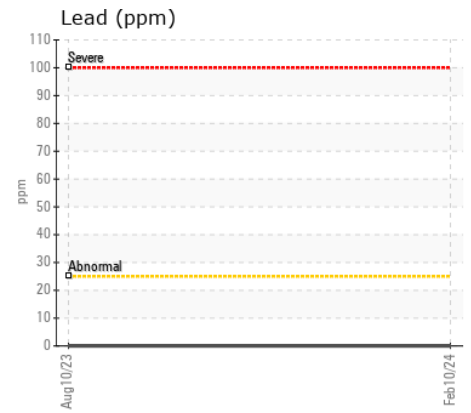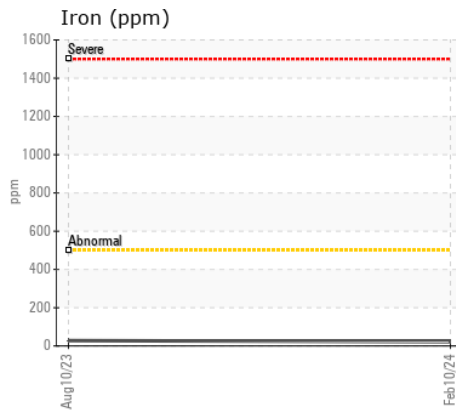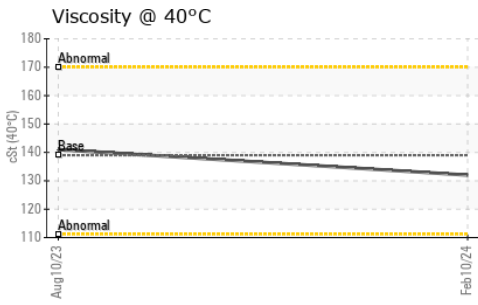

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP445849
Lab Number : 06098717
Unique Number : 10896947
Test Package : MOB 1

Received : 23 Feb 2024
Tested : 26 Feb 2024
Diagnosed : 26 Feb 2024 - Don Baldrige

FERROUS PROCESSING AND TRADING
 3400 E LAFAYETTE
 DETROIT, MI
 US 48207
 Contact: KEITH HALL
 keith.hall@fpt1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: