



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ABNORMAL

Area

[HILLS CREEK TIMBER]

Machine Id

JOHN DEERE 748L-II 717487

Component

Diesel Engine

Fluid

JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- QTS)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0177035	---	---
Sample Date		Client Info		21 Feb 2024	---	---
Machine Age	hrs	Client Info		481	---	---
Oil Age	hrs	Client Info		481	---	---
Filter Age	hrs	Client Info		481	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

WEAR

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>51	18	---	---
Chromium	ppm	ASTM D5185m	>11	<1	---	---
Nickel	ppm	ASTM D5185m	>5	1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>31	4	---	---
Lead	ppm	ASTM D5185m	>26	3	---	---
Copper	ppm	ASTM D5185m	>26	▲ 325	---	---
Tin	ppm	ASTM D5185m	>4	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

Tests indicate that there is no fuel present in the oil. There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	8	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Fuel	%	ASTM D3524	>2.1	0.3	---	---
Water		WC Method	>0.21	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.3	---	---
Nitration	Abs/cm	*ASTM D7624	>20	8.7	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.0	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---	---

FLUID CONDITION


The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m	>31	5	---	---
Boron	ppm	ASTM D5185m		144	---	---
Barium	ppm	ASTM D5185m		2	---	---
Molybdenum	ppm	ASTM D5185m		202	---	---
Manganese	ppm	ASTM D5185m		4	---	---
Magnesium	ppm	ASTM D5185m		631	---	---
Calcium	ppm	ASTM D5185m		1635	---	---
Phosphorus	ppm	ASTM D5185m		914	---	---
Zinc	ppm	ASTM D5185m		1086	---	---
Sulfur	ppm	ASTM D5185m		3159	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.7	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	8.1	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 10.8	---	---


▲ Viscosity @ 100°C

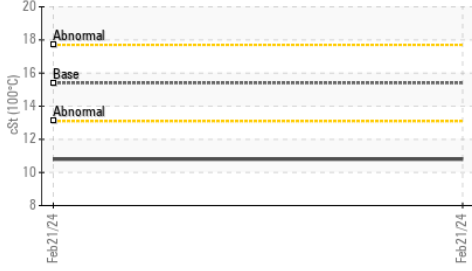


▲ Non-ferrous Metals

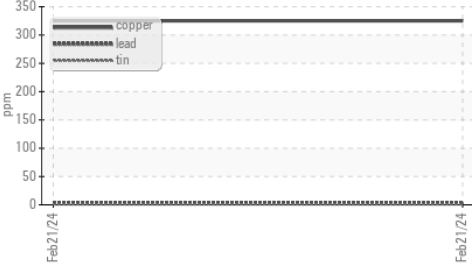


Fuel Dilution

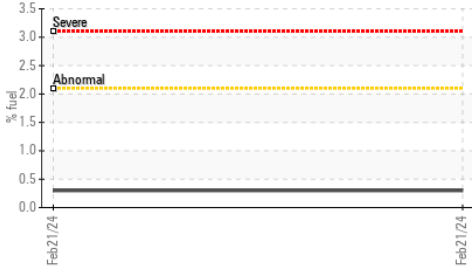


Base Number

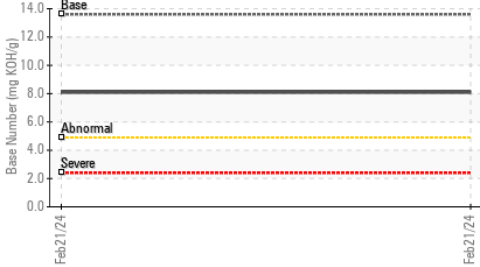


Ferrous Alloys

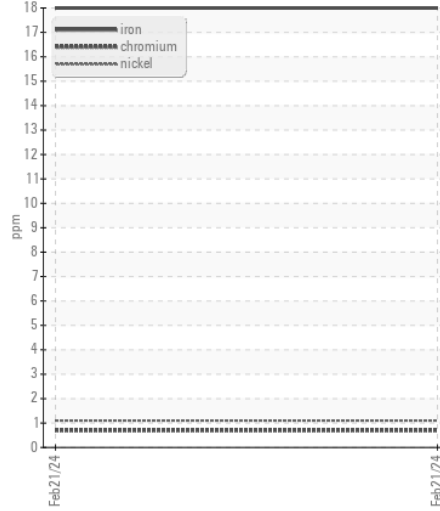


▲ Non-ferrous Metals

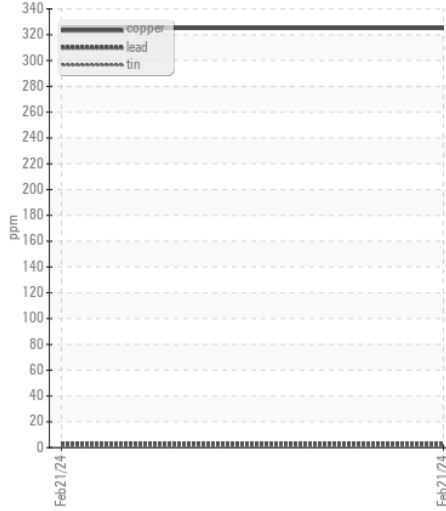

▲ Viscosity @ 100°C

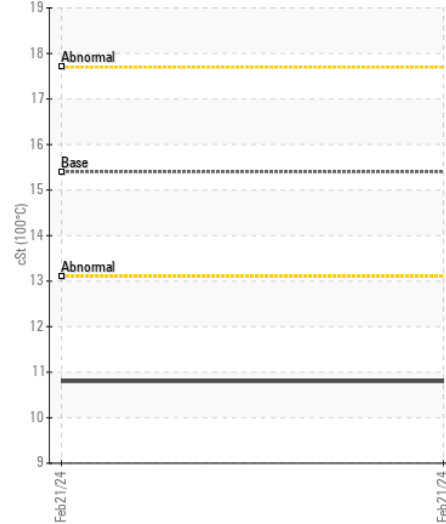

Base Number

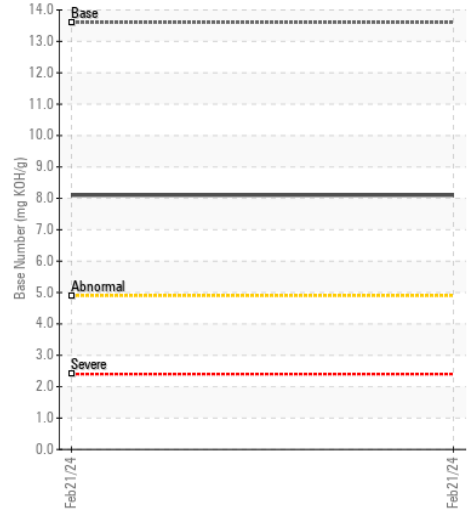

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0177035 **Received** : 23 Feb 2024
Lab Number : 06098907 **Tested** : 27 Feb 2024
Unique Number : 10897137 **Diagnosed** : 27 Feb 2024 - Sean Felton
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

JRE - MOUNT GILEAD
 305 NORTH MAIN STREET
 MOUNT GILEAD, NC
 US 27306

Contact: ADAM CRUMP
 adam.crump@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (910)439-4568