



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 5115M 1LV5115MCKR402746 (S/N 1LV3033RHJJ103537)**

Component  
**Diesel Engine**

Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0183660</b>	---	---
Sample Date		Client Info		<b>20 Feb 2024</b>	---	---
Machine Age	hrs	Client Info		<b>920</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>51	<b>10</b>	---	---
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>31	<b>5</b>	---	---
Lead	ppm	ASTM D5185m	>26	<b>2</b>	---	---
Copper	ppm	ASTM D5185m	>26	<b>3</b>	---	---
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	<b>6</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	---	---
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	---	---
Water		WC Method	>0.21	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	---	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.2</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.1</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	---	---

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<b>1</b>	---	---
Boron	ppm	ASTM D5185m		<b>235</b>	---	---
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>247</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>906</b>	---	---
Calcium	ppm	ASTM D5185m		<b>1570</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>894</b>	---	---
Zinc	ppm	ASTM D5185m		<b>1098</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>3112</b>	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.6</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.7</b>	---	---
Visc @ 100°C	cSt	ASTM D445		<b>13.6</b>	---	---

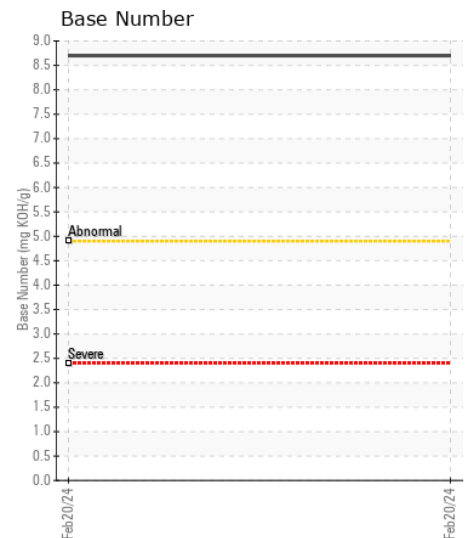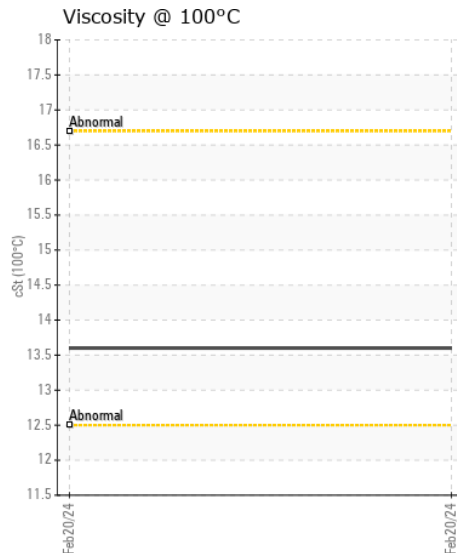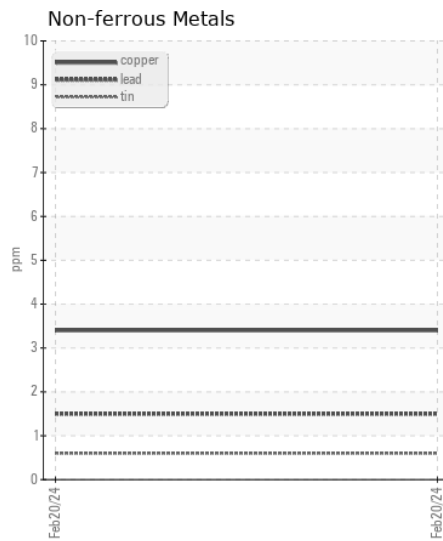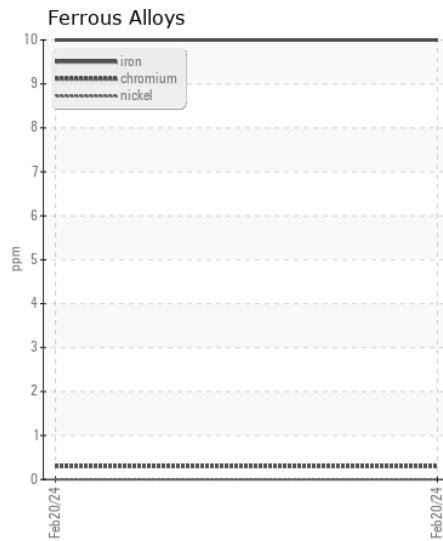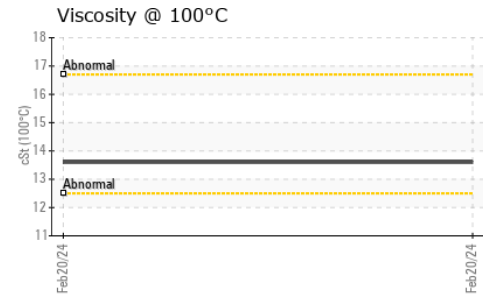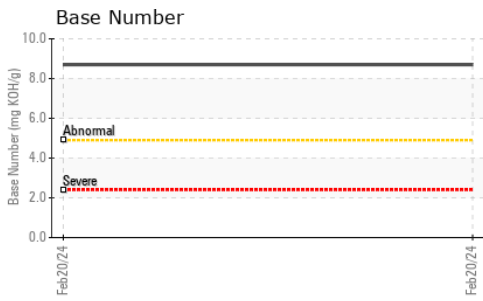

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : JR0183660

**Lab Number** : 06098916

**Unique Number** : 10897146

**Test Package** : CONST ( Additional Tests: TBN )

**Received** : 23 Feb 2024

**Tested** : 26 Feb 2024

**Diagnosed** : 26 Feb 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - HARRISONBURG**

1332 GARBERS CHURCH RD

HARRISONBURG, VA

US 22801

Contact: ETHAN SHEETS

ETHAN.SHEETS@JAMESRIVEREQUIPMENT.COM

T:

F: