



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id

**58**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON HP 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0867924</b>	WC0740555	---
Sample Date		Client Info		<b>07 Feb 2024</b>	12 Apr 2023	---
Machine Age	mls	Client Info		<b>49485</b>	39151	---
Oil Age	mls	Client Info		<b>0</b>	0	---
Filter Age	mls	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	---
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	---
Sample Status				<b>NORMAL</b>	NORMAL	---

## WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	<b>13</b>	26	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	---
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	8	---
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	---
Copper	ppm	ASTM D5185m	>330	<b>1</b>	4	---
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>4</b>	8	---
Potassium	ppm	ASTM D5185m	>20	<b>7</b>	12	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.6	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.1</b>	10.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.3</b>	21.6	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	3	---
Boron	ppm	ASTM D5185m		<b>5</b>	13	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>59</b>	71	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	2	---
Magnesium	ppm	ASTM D5185m		<b>883</b>	541	---
Calcium	ppm	ASTM D5185m		<b>1231</b>	1416	---
Phosphorus	ppm	ASTM D5185m		<b>993</b>	884	---
Zinc	ppm	ASTM D5185m		<b>1240</b>	1158	---
Sulfur	ppm	ASTM D5185m		<b>3220</b>	3294	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.0</b>	19.1	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.1</b>	5.7	---
Visc @ 100°C	cSt	ASTM D445	15.6	<b>13.2</b>	12.8	---

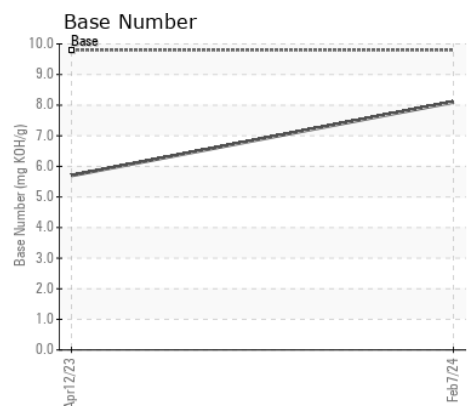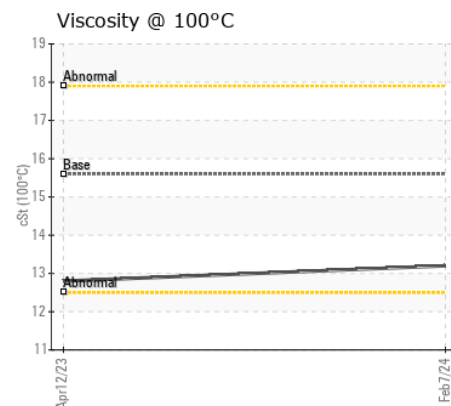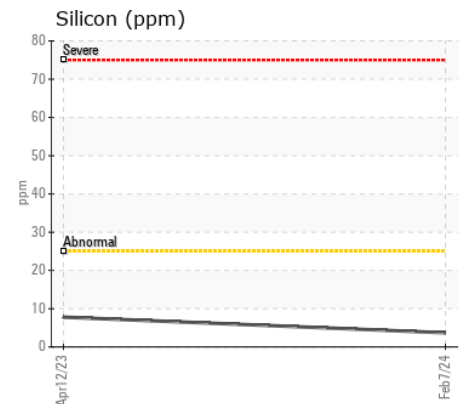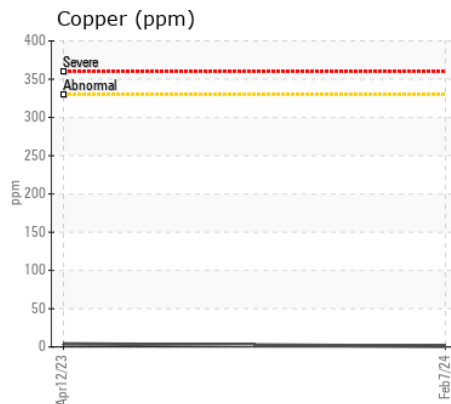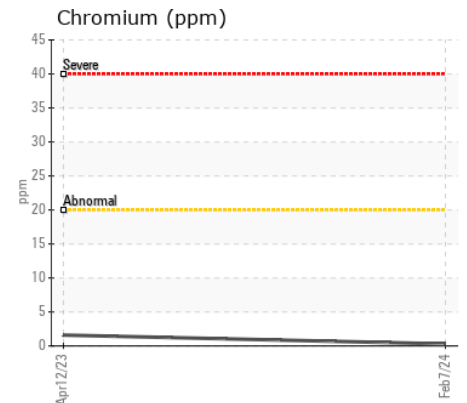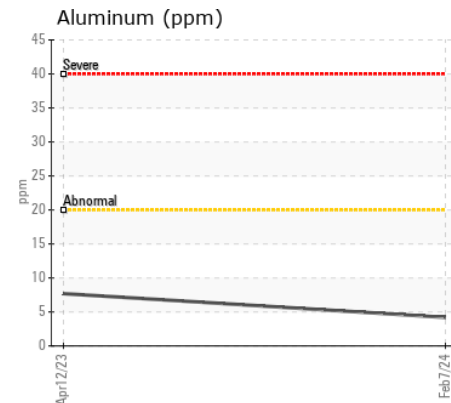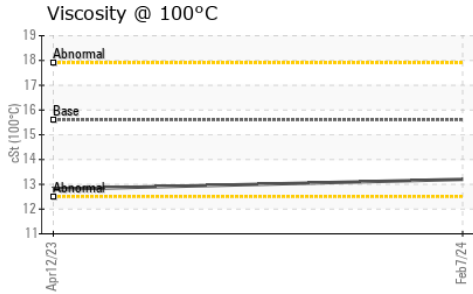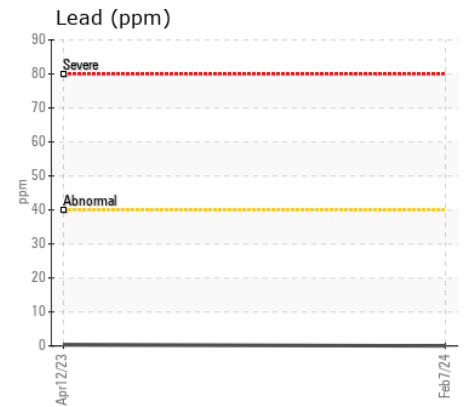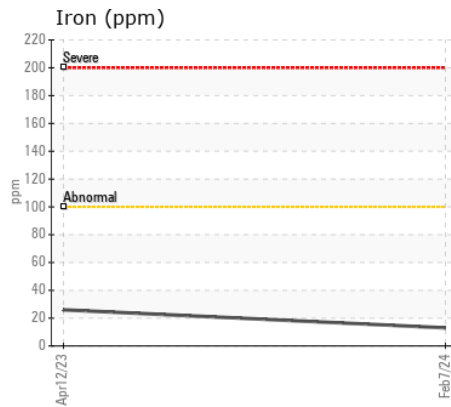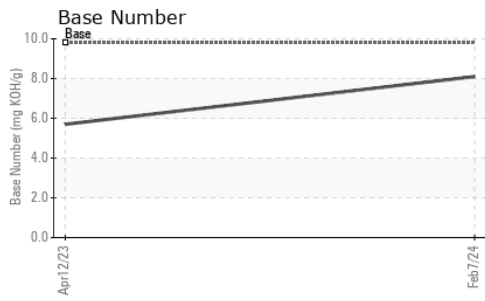

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0867924  
**Lab Number** : 06098956  
**Unique Number** : 10897186  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**Received** : 23 Feb 2024  
**Tested** : 26 Feb 2024  
**Diagnosed** : 26 Feb 2024 - Wes Davis

**ANSON CO SCHOOL BUS GARAGE**  
 89 BOGGAN CUT RD  
 WADESBORO, NC  
 US 28135  
 Contact: MATT POWELL  
 powell.berkeley@anson.k12.nc.us

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: