



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Y.S. CHI
Machine Id
[Y.S. CHI] 007 503877-7
Component
Port Genset
Fluid
CHEVRON DELO 400 XLE 15W40 (240 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0064555	MW0061233	MW0055176
Sample Date		Client Info		22 Jan 2024	22 Nov 2023	01 Sep 2023
Machine Age	hrs	Client Info		16401	15596	14473
Oil Age	hrs	Client Info		401	400	161
Filter Age	hrs	Client Info		401	400	161
Oil Changed		Client Info		Changed	Not Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	14	15	7
Chromium	ppm	ASTM D5185m	>4	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m		3	3	3
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>12	4	3	1
Lead	ppm	ASTM D5185m	>17	<1	0	<1
Copper	ppm	ASTM D5185m	>70	2	<1	<1
Tin	ppm	ASTM D5185m	>15	0	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	7	8	6
Potassium	ppm	ASTM D5185m	>20	1	2	2
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.5	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	9.9	9.4	7.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.8	23.2	22.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	<1	1
Boron	ppm	ASTM D5185m		242	283	316
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		120	126	114
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		747	722	708
Calcium	ppm	ASTM D5185m		1704	1672	1614
Phosphorus	ppm	ASTM D5185m	760	758	746	696
Zinc	ppm	ASTM D5185m	830	907	893	839
Sulfur	ppm	ASTM D5185m	2770	2685	2669	2598
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.9	18.9	16.5
Base Number (BN)	mg KOH/g	ASTM D2896	10.7	7.4	7.5	8.6
Visc @ 100°C	cSt	ASTM D445	14.9	13.6	13.1	13.3

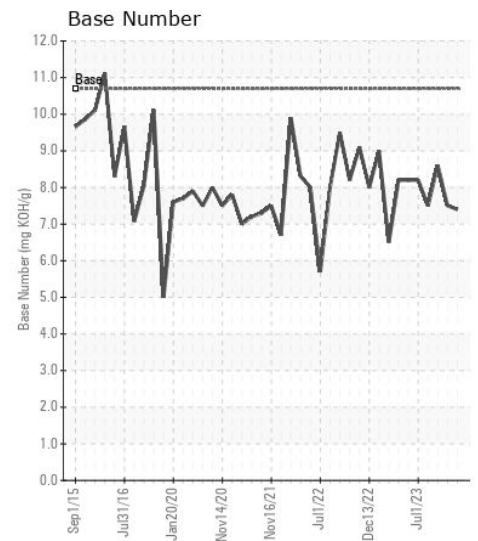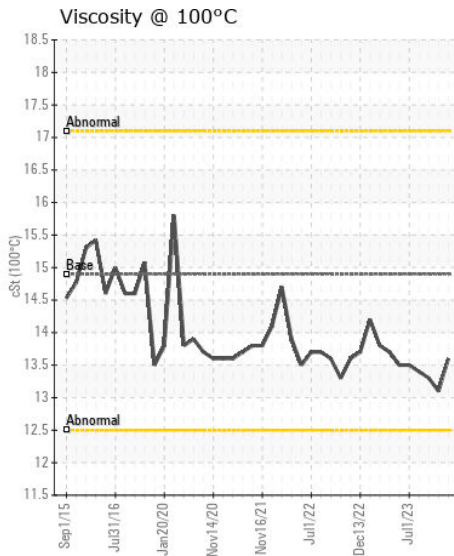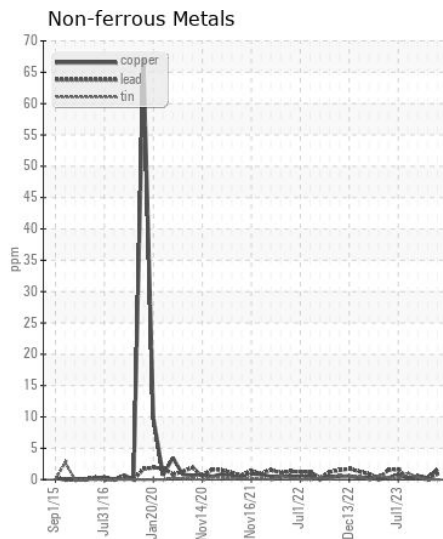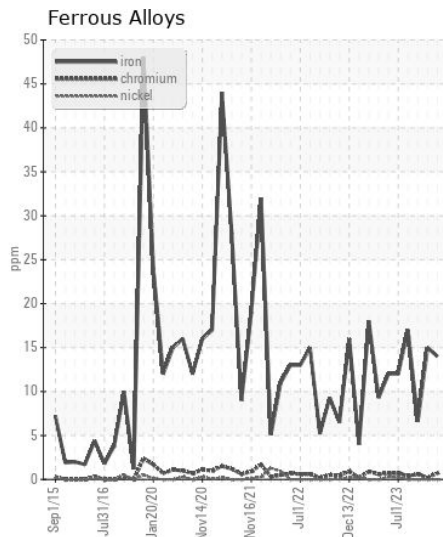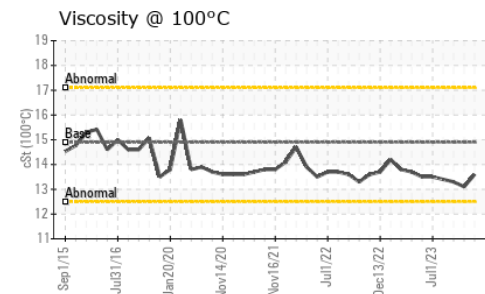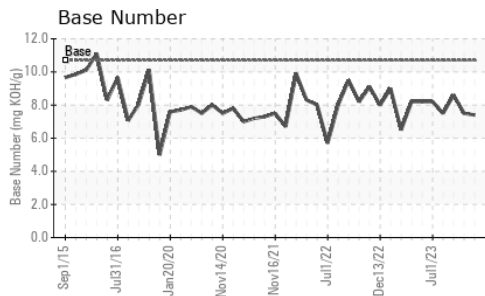

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0064555
Lab Number : 06098986
Unique Number : 10897216
Test Package : MAR 2

Received : 23 Feb 2024
Tested : 26 Feb 2024
Diagnosed : 26 Feb 2024 - Wes Davis

INGRAM BARGE
 900 S 3RD ST
 PADUCAH, KY
 US 42003

Contact: ANTHONY VAN CURA
 anthony.vancura@ingrambarga.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (270)415-4467
 F: (615)695-3697