



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

**SULLIVAN FARMS**

Machine Id

**JOHN DEERE 7730 JOHN DEERE 7730 TRACTOR (S/N 1RW7730ACAA032293)**

Component

**Diesel Engine**

Fluid

**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0910393	---	---
Sample Date		Client Info		21 Feb 2024	---	---
Machine Age	hrs	Client Info		9458	---	---
Oil Age	hrs	Client Info		9458	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

## WEAR

Metal levels are typical for a components first oil change.

Iron	ppm	ASTM D5185m	>51	4	---	---
Chromium	ppm	ASTM D5185m	>11	<1	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>31	3	---	---
Lead	ppm	ASTM D5185m	>26	<1	---	---
Copper	ppm	ASTM D5185m	>26	<1	---	---
Tin	ppm	ASTM D5185m	>4	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	7	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Fuel		WC Method	>2.1	<1.0	---	---
Water		WC Method	>0.21	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	5.6	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.5	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	1	---	---
Boron	ppm	ASTM D5185m		290	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		249	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		852	---	---
Calcium	ppm	ASTM D5185m		1435	---	---
Phosphorus	ppm	ASTM D5185m		955	---	---
Zinc	ppm	ASTM D5185m		1117	---	---
Sulfur	ppm	ASTM D5185m		3231	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.0	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	10.1	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	14.5	---	---

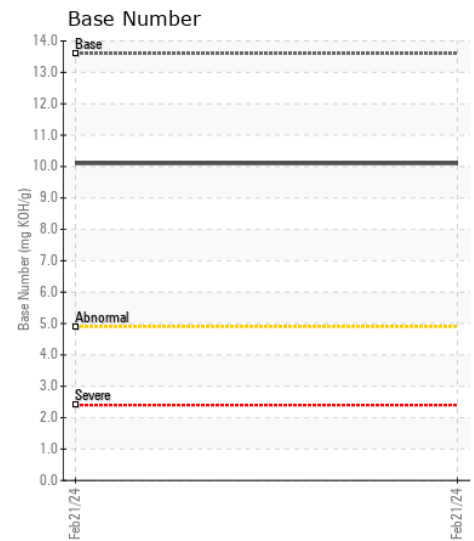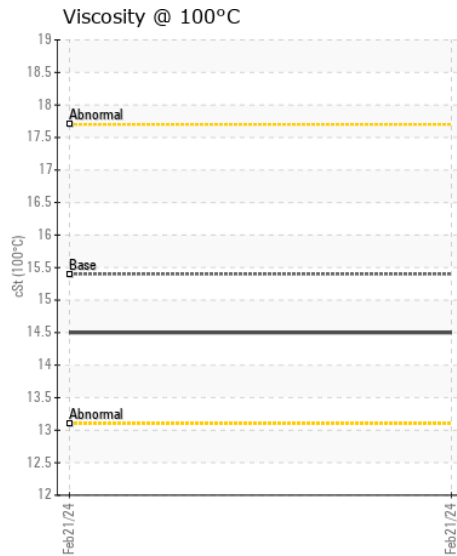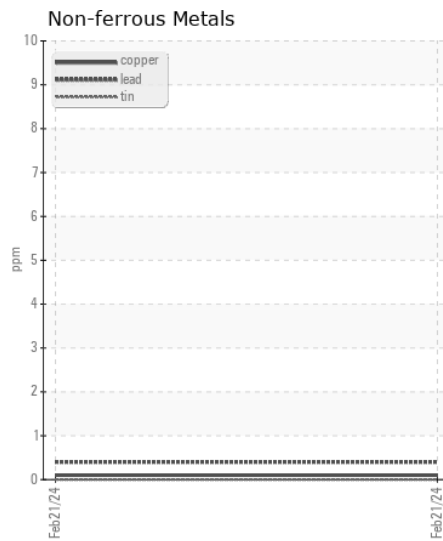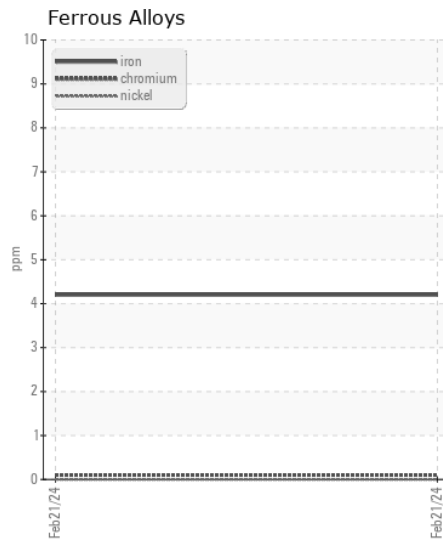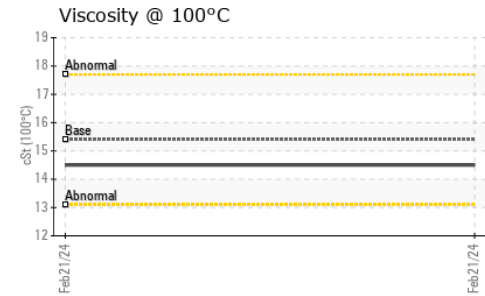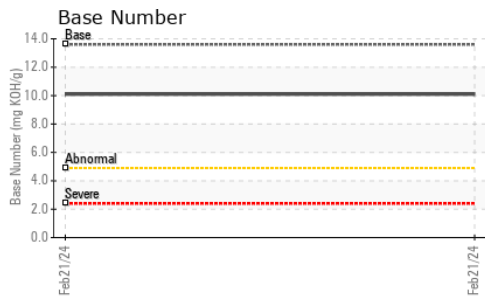

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0910393 **Received** : 23 Feb 2024  
**Lab Number** : 06099022 **Tested** : 26 Feb 2024  
**Unique Number** : 10897252 **Diagnosed** : 26 Feb 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**QUALITY EQUIPMENT**

1718 HWY 301 S  
WILSON, NC  
US 27893

Contact: BEXLEY EATMON  
beatmon@qualityequip.com

T: (252)291-0110

F: