



OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[147844]
 Machine Id
JOHN DEERE 210G 1FF210GXCMF529694
 Component
Diesel Engine
 Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (6 GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0048092	LEC0041850	LEC0035739
Sample Date		Client Info		21 Feb 2024	31 May 2023	28 Nov 2022
Machine Age	hrs	Client Info		1369	831	412
Oil Age	hrs	Client Info		538	831	412
Filter Age	hrs	Client Info		538	831	412
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

WEAR

Cylinder, crank, or cam shaft wear is indicated. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	▲ 53	24	53
Chromium	ppm	ASTM D5185m	>11	<1	<1	2
Nickel	ppm	ASTM D5185m	>5	4	3	8
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>31	5	5	5
Lead	ppm	ASTM D5185m	>26	<1	<1	6
Copper	ppm	ASTM D5185m	>26	20	▲ 68	▲ 489
Tin	ppm	ASTM D5185m	>4	1	1	2
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.




Silicon	ppm	ASTM D5185m	>120	9	8	12
Potassium	ppm	ASTM D5185m	>20	0	4	<1
Fuel		WC Method	>2.1	<1.0	<1.0	0.4
Water		WC Method	>0.21	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.6	0.5	0.6
Nitration	Abs/cm	*ASTM D7624	>20	9.6	9.4	10.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.8	23.6	26.7
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	NEG

FLUID CONDITION





The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>31	5	4	8
Boron	ppm	ASTM D5185m		198	209	178
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		267	244	253
Manganese	ppm	ASTM D5185m		1	2	6
Magnesium	ppm	ASTM D5185m		830	851	807
Calcium	ppm	ASTM D5185m		1610	1525	1503
Phosphorus	ppm	ASTM D5185m		932	931	842
Zinc	ppm	ASTM D5185m		1074	1174	1041
Sulfur	ppm	ASTM D5185m		2980	3283	3143
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.5	18.1	22.1
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	8.5	8.6	9.7
Visc @ 100°C	cSt	ASTM D445	15.4	13.5	13.6	▲ 10.7

▲ Ferrous Alloys

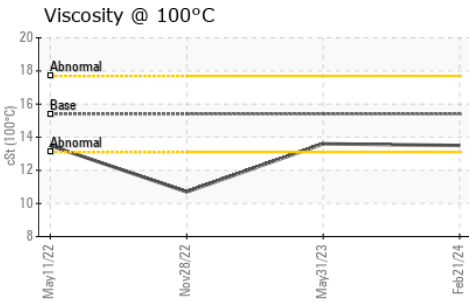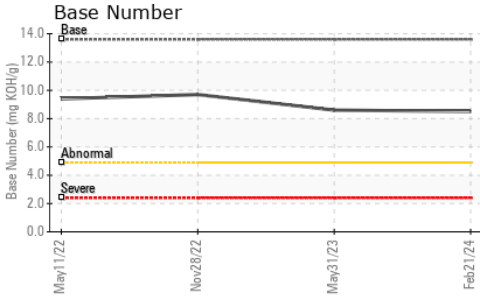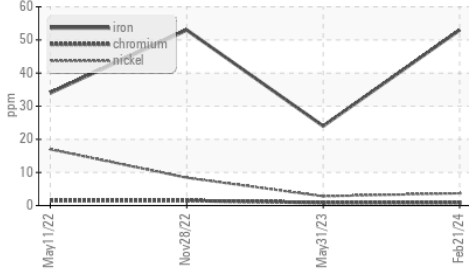

▲ Ferrous Alloys

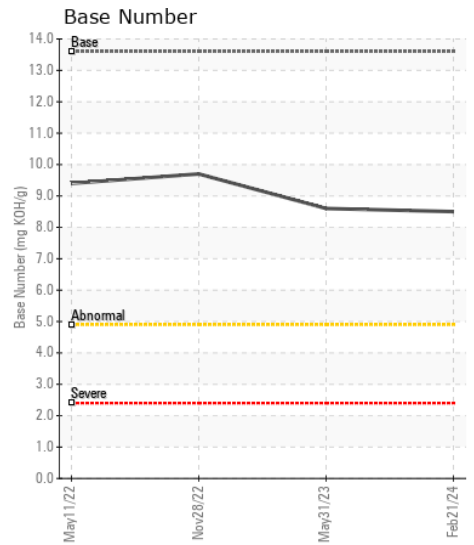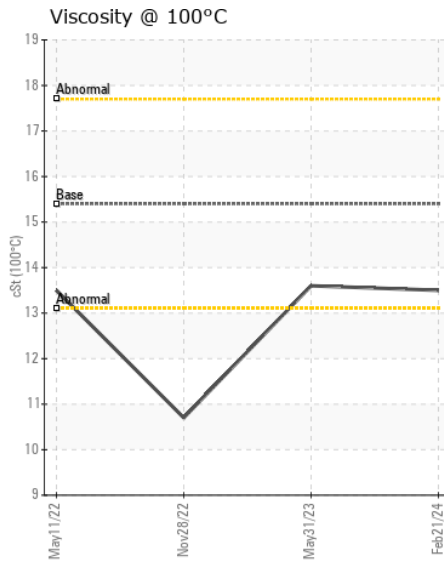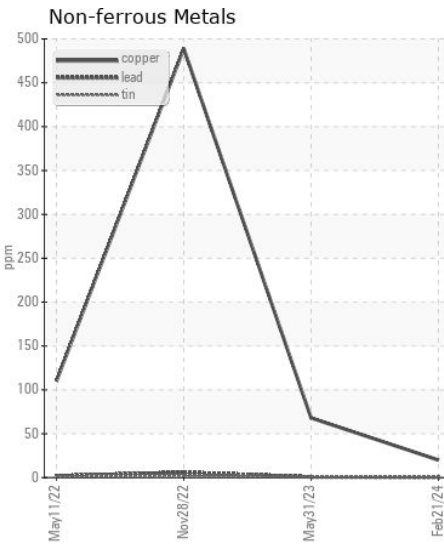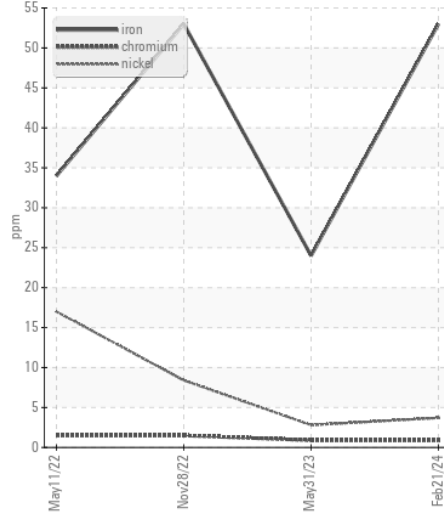

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0048092 **Received** : 23 Feb 2024
Lab Number : 06099031 **Tested** : 26 Feb 2024
Unique Number : 10897261 **Diagnosed** : 26 Feb 2024 - Don Baldrige
Test Package : CONST (Additional Tests: TBN)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com
 T:
 F: (740)373-5570

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)