



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ABNORMAL

Area
[05W44882]
 Machine Id
JOHN DEERE 350P 6011415 (S/N 1FF350PAJPF000776)
 Component
Hydraulic System
 Fluid
JOHN DEERE ZINC-FREE HYDRAULIC OIL 46 (55 GAL)

RECOMMENDATION

Recommend drain oil if not already done. Reduce drain interval to 2000 hours or drain and flush and use recommended zinc free oil. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0203293	---	---
Sample Date		Client Info		21 Feb 2024	---	---
Machine Age	hrs	Client Info		472	---	---
Oil Age	hrs	Client Info		472	---	---
Filter Age	hrs	Client Info		472	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	14	---	---
Iron	ppm	ASTM D5185m	>32	<1	---	---
Chromium	ppm	ASTM D5185m	>9	0	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>9	0	---	---
Lead	ppm	ASTM D5185m	>28	<1	---	---
Copper	ppm	ASTM D5185m	>50	5	---	---
Tin	ppm	ASTM D5185m	>5	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>11	4	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.075	NEG	---	---
Particles >4µm		ASTM D7647	>80000	7844	---	---
Particles >6µm		ASTM D7647	>20000	356	---	---
Particles >14µm		ASTM D7647	>640	14	---	---
Particles >21µm		ASTM D7647	>160	3	---	---
Particles >38µm		ASTM D7647	>40	1	---	---
Particles >71µm		ASTM D7647	>10	0	---	---
Oil Cleanliness		ISO 4406 (c)	>23/21/16	20/16/11	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

FLUID CONDITION

The AN level is above the recommended limit. Zinc level above manufacturer's recommendations. Confirm oil type.

Sodium	ppm	ASTM D5185m	>21	<1	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		<1	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		3	---	---
Calcium	ppm	ASTM D5185m		268	---	---
Phosphorus	ppm	ASTM D5185m		574	---	---
Zinc	ppm	ASTM D5185m		▲ 152	---	---
Sulfur	ppm	ASTM D5185m		477	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	▲ 0.48	---	---
Visc @ 40°C	cSt	ASTM D445	47	47.5	---	---

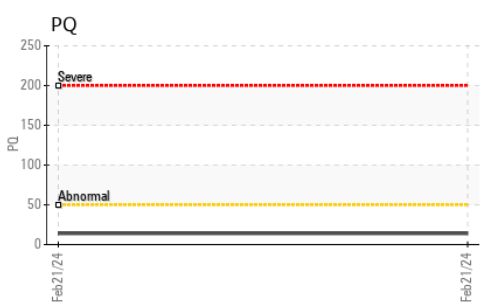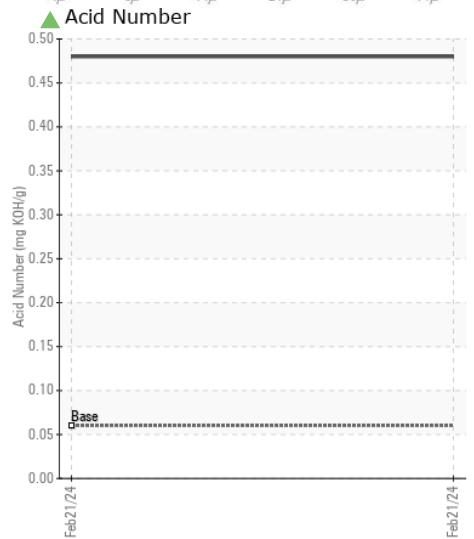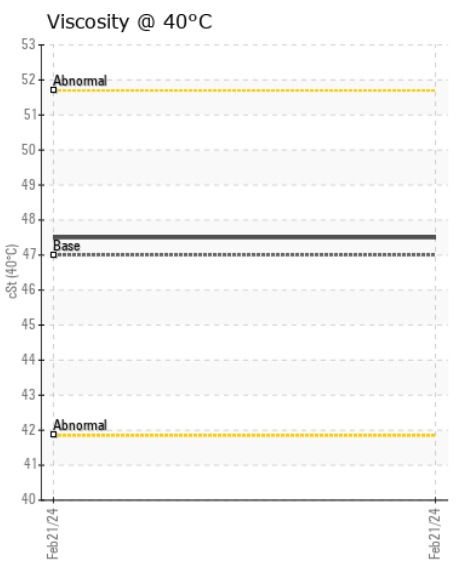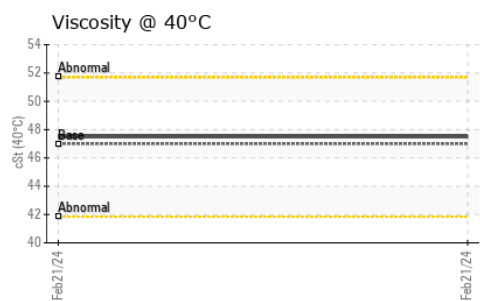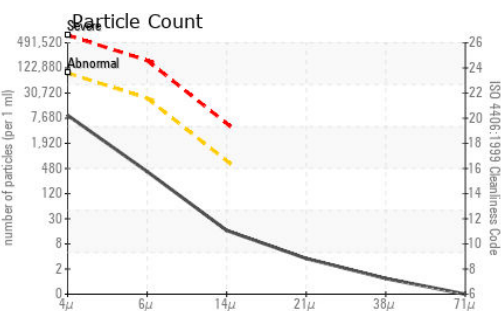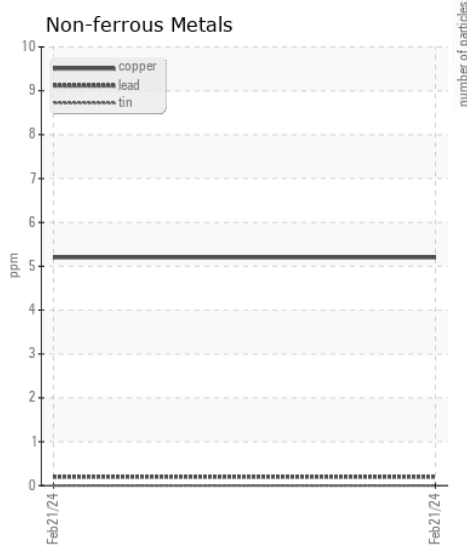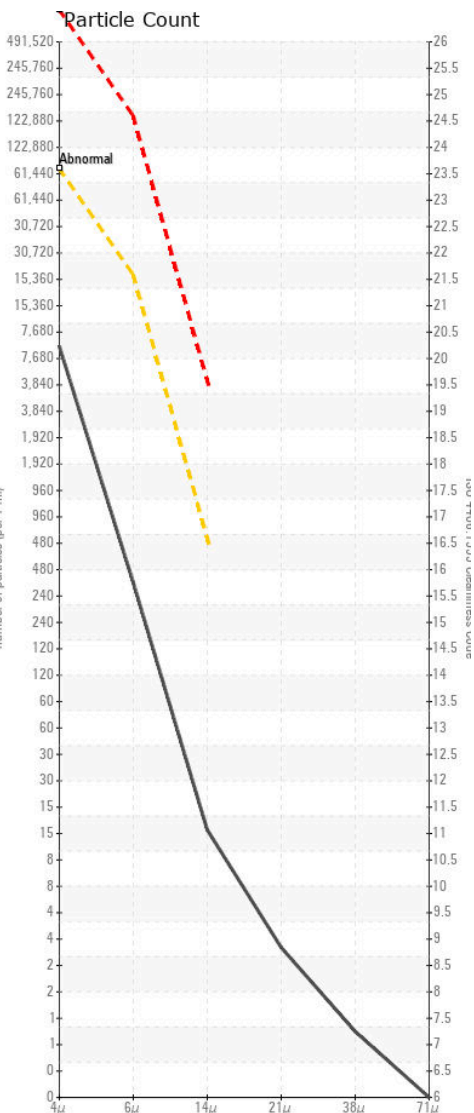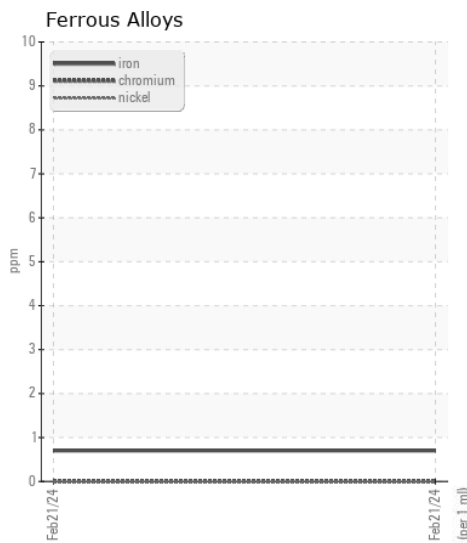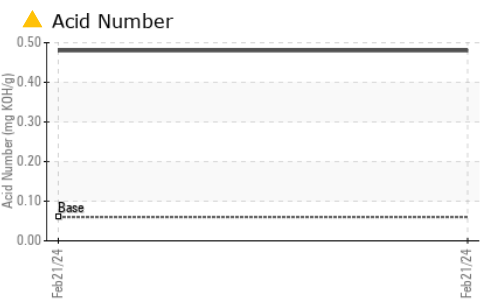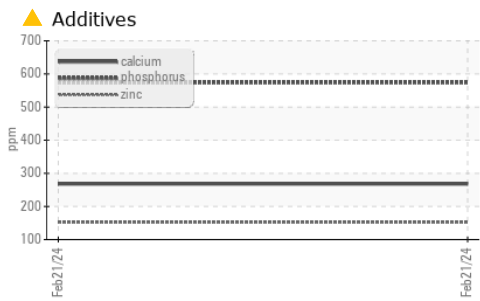

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0203293 **Received** : 23 Feb 2024
Lab Number : 06099045 **Tested** : 26 Feb 2024
Unique Number : 10897275 **Diagnosed** : 26 Feb 2024 - Angela Borella
Test Package : CONST (Additional Tests: PQ)

B & S SITE DEVELOPMENT
 7800 PINEY BRANCH LANE
 BRISTOW, VA
 US 20136
 Contact: DANNY HUFF
 dhuff@bandssite.com
 T: (540)270-3203
 F: (703)753-0605

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)