



# OIL ANALYSIS REPORT

WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>ABNORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

## SULLIVAN FARMS

Machine Id

### JOHN DEERE 7730 JOHN DEERE 7730 TRACTOR (S/N 1RW7730ACAA032293)

Component

### Hydraulic System

Fluid

### JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

#### RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0910394	---	---
Sample Date		Client Info		21 Feb 2024	---	---
Machine Age	hrs	Client Info		9458	---	---
Oil Age	hrs	Client Info		9458	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

#### WEAR

The iron level is abnormal. All other component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>20	▲ 32	---	---
Chromium	ppm	ASTM D5185m	>10	1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	4	---	---
Lead	ppm	ASTM D5185m	>10	2	---	---
Copper	ppm	ASTM D5185m	>75	21	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

#### CONTAMINATION











There is a high amount of particulates present in the oil.

Silicon	ppm	ASTM D5185m	>20	13	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	▲ 106244	---	---
Particles >6µm		ASTM D7647	>1300	▲ 30704	---	---
Particles >14µm		ASTM D7647	>160	▲ 551	---	---
Particles >21µm		ASTM D7647	>40	▲ 69	---	---
Particles >38µm		ASTM D7647	>10	1	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 24/22/16	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	LIGHT	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

#### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m	6	1	---	---
Barium	ppm	ASTM D5185m	0	<1	---	---
Molybdenum	ppm	ASTM D5185m	0	0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	145	99	---	---
Calcium	ppm	ASTM D5185m	3570	3257	---	---
Phosphorus	ppm	ASTM D5185m	1290	975	---	---
Zinc	ppm	ASTM D5185m	1640	1186	---	---
Sulfur	ppm	ASTM D5185m		3184	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.8	1.33	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	52.6	---	---

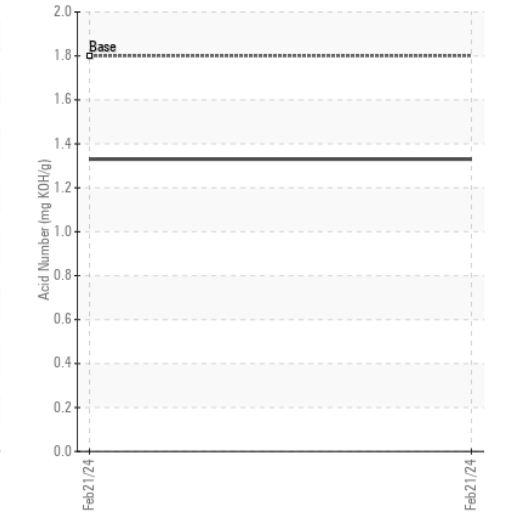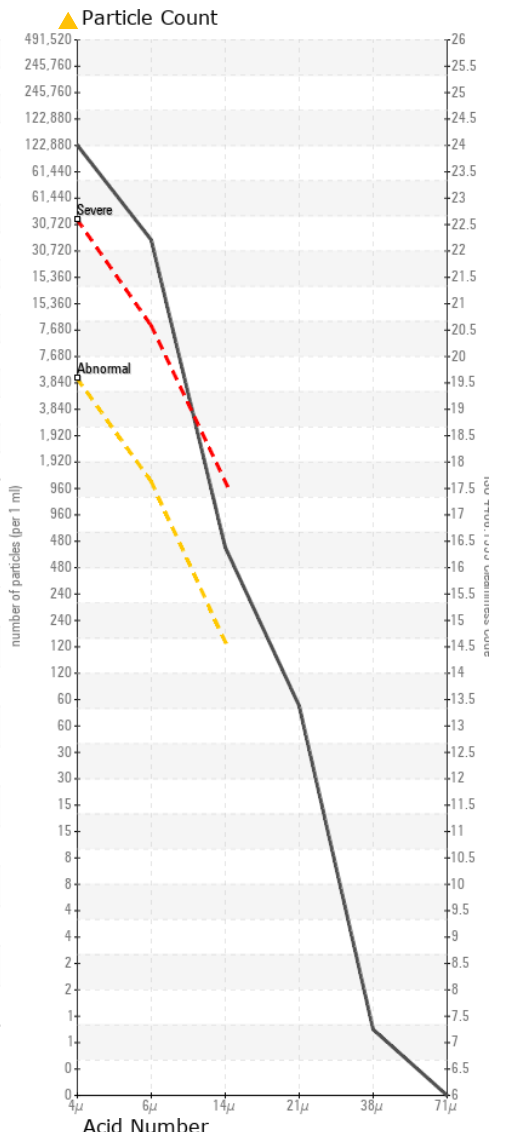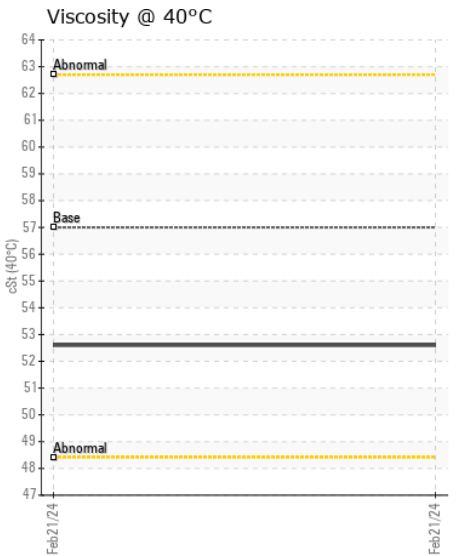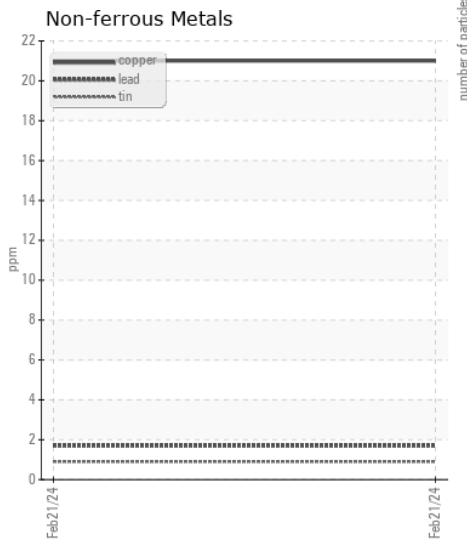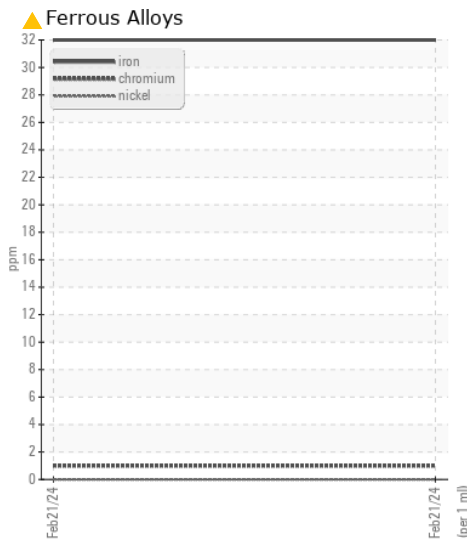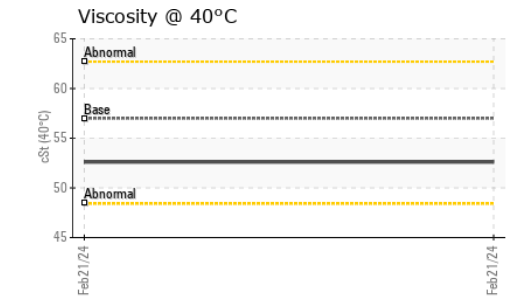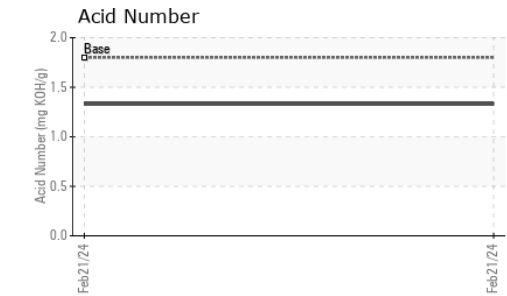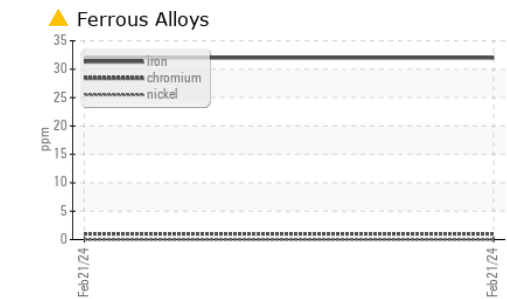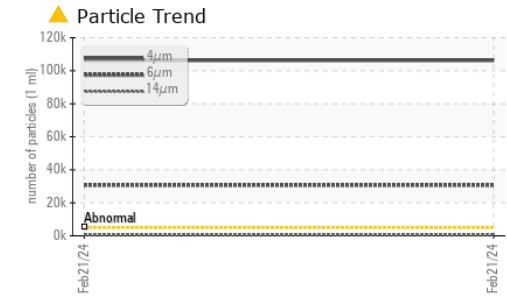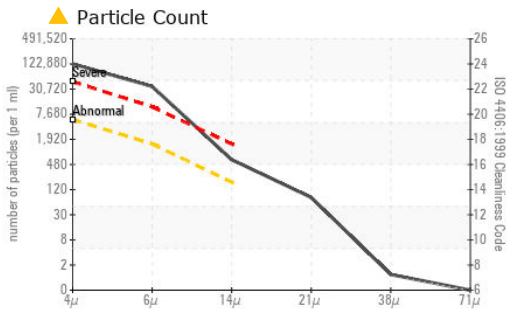

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0910394 **Received** : 23 Feb 2024  
**Lab Number** : 06099098 **Tested** : 26 Feb 2024  
**Unique Number** : 10897328 **Diagnosed** : 26 Feb 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**QUALITY EQUIPMENT**  
 1718 HWY 301 S  
 WILSON, NC  
 US 27893  
 Contact: BEXLEY EATMON  
 beatmon@qualityequip.com  
 T: (252)291-0110  
 F: