



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**Y.S. CHI**  
Machine Id  
**[Y.S. CHI] 003 503877-3**  
Component  
**Starboard Main Engine**  
Fluid  
**CHEVRON DELO 710 LS (240 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0061208</b>	MW0064550	MW0064547
Sample Date		Client Info		<b>04 Feb 2024</b>	07 Jan 2024	01 Jan 2024
Machine Age	hrs	Client Info		<b>30988</b>	30347	30203
Oil Age	hrs	Client Info		<b>1247</b>	606	462
Filter Age	hrs	Client Info		<b>408</b>	310	166
Oil Changed		Client Info		<b>Changed</b>	N/A	Changed
Filter Changed		Client Info		<b>Changed</b>	N/A	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	<b>5</b>	4	4
Chromium	ppm	ASTM D5185m	>8	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	2
Lead	ppm	ASTM D5185m	>18	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m	>80	<b>1</b>	1	<1
Tin	ppm	ASTM D5185m	>14	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>6</b>	5	4
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	3	2
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0.3</b>	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.4</b>	6.5	6.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>14.4</b>	13.9	13.7
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	<b>0</b>	0	0
Boron	ppm	ASTM D5185m		<b>40</b>	42	48
Barium	ppm	ASTM D5185m		<b>5</b>	5	2
Molybdenum	ppm	ASTM D5185m		<b>43</b>	44	46
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>8</b>	9	10
Calcium	ppm	ASTM D5185m		<b>3052</b>	3026	3327
Phosphorus	ppm	ASTM D5185m		<b>0</b>	0	15
Zinc	ppm	ASTM D5185m		<b>4</b>	4	0
Sulfur	ppm	ASTM D5185m		<b>2285</b>	2215	2364
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>7.9</b>	7.1	6.9
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	<b>9.51</b>	9.39	9.85
Visc @ 100°C	cSt	ASTM D445	15.5	<b>13.9</b>	14.2	14.1

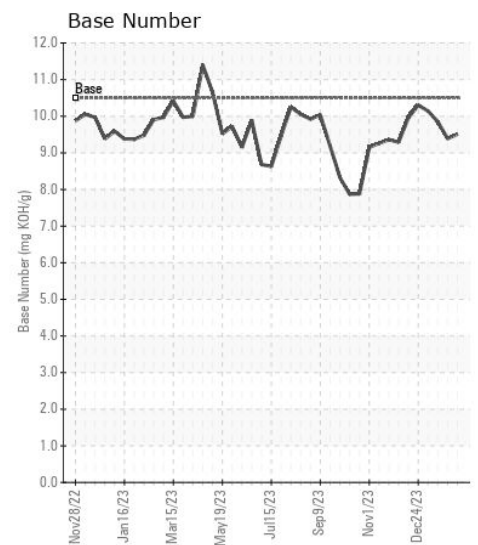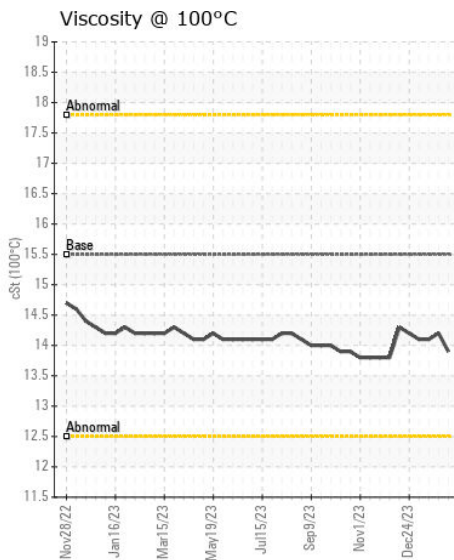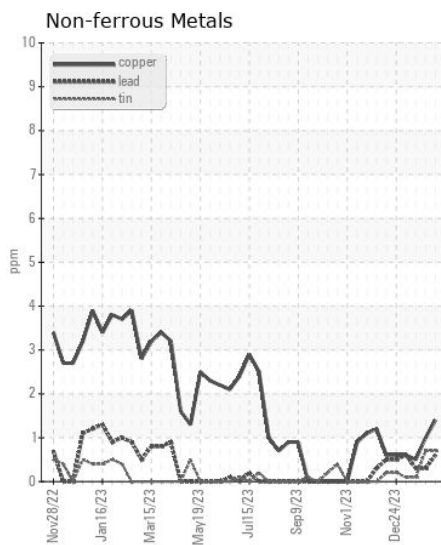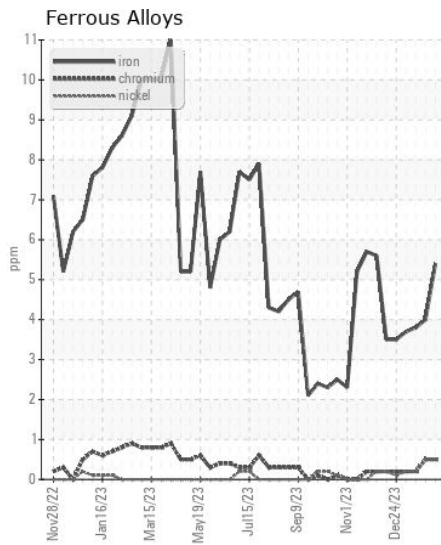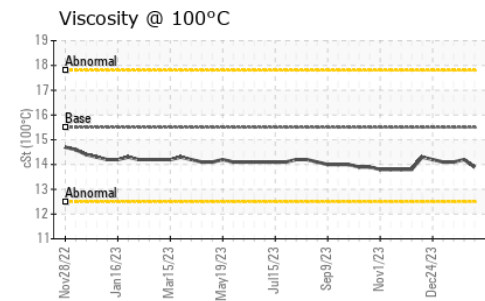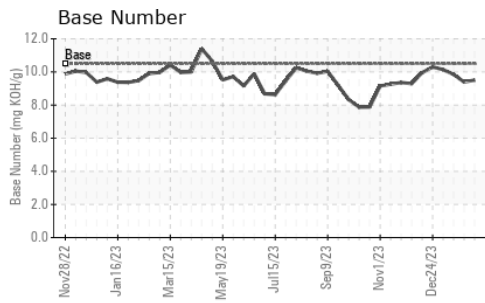

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0061208  
**Lab Number** : 06099298  
**Unique Number** : 10897528  
**Test Package** : MAR 2

**Received** : 23 Feb 2024  
**Tested** : 26 Feb 2024  
**Diagnosed** : 26 Feb 2024 - Wes Davis

**INGRAM BARGE**  
 900 S 3RD ST  
 PADUCAH, KY  
 US 42003

Contact: ANTHONY VAN CURA  
 anthony.vancura@ingrambarga.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (270)415-4467  
 F: (615)695-3697