



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**Y.S. CHI**  
Machine Id  
**[Y.S. CHI] 001 503877-1**  
Component  
**Port Main Engine**  
Fluid  
**CHEVRON DELO 710 LS (350 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0061207</b>	MW0064549	MW0064546
Sample Date		Client Info		<b>04 Feb 2024</b>	07 Jan 2024	01 Jan 2024
Machine Age	hrs	Client Info		<b>30973</b>	30334	30190
Oil Age	hrs	Client Info		<b>1247</b>	606	462
Filter Age	hrs	Client Info		<b>408</b>	310	166
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	<b>8</b>	6	5
Chromium	ppm	ASTM D5185m	>8	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m	>3	<b>&lt;1</b>	1	<1
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	2
Lead	ppm	ASTM D5185m	>18	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m	>80	<b>2</b>	1	<1
Tin	ppm	ASTM D5185m	>14	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>7</b>	6	5
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	3	3
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0.4</b>	0.3	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.0</b>	7.0	6.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>15.0</b>	14.3	14.1
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	<b>0</b>	0	0
Boron	ppm	ASTM D5185m		<b>37</b>	41	47
Barium	ppm	ASTM D5185m		<b>5</b>	5	2
Molybdenum	ppm	ASTM D5185m		<b>43</b>	45	47
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>9</b>	14	10
Calcium	ppm	ASTM D5185m		<b>3045</b>	3082	3361
Phosphorus	ppm	ASTM D5185m		<b>0</b>	0	14
Zinc	ppm	ASTM D5185m		<b>4</b>	12	0
Sulfur	ppm	ASTM D5185m		<b>2240</b>	2194	2436
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>8.6</b>	7.5	7.3
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	<b>9.04</b>	9.18	9.55
Visc @ 100°C	cSt	ASTM D445	15.5	<b>14.3</b>	14.3	14.3

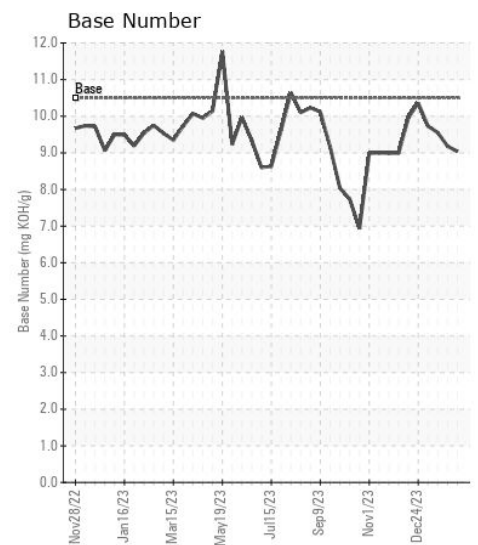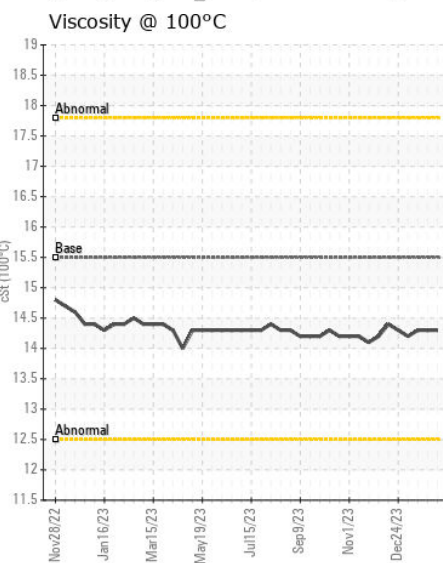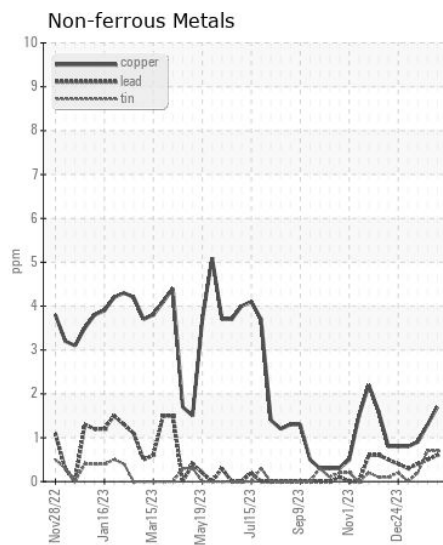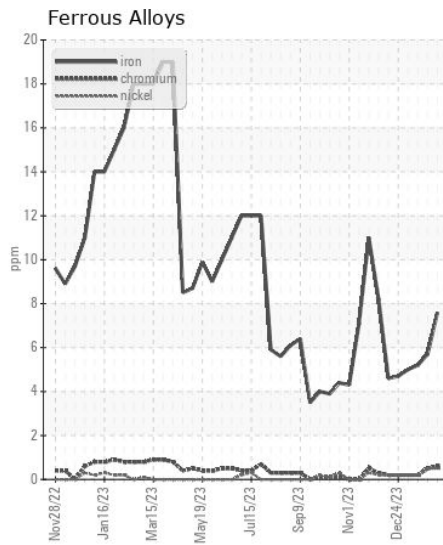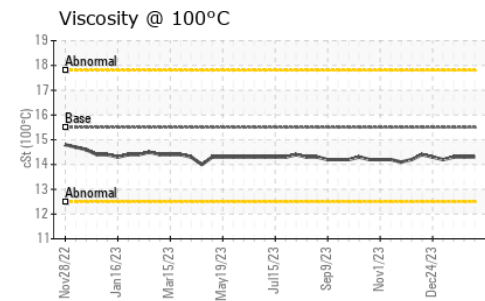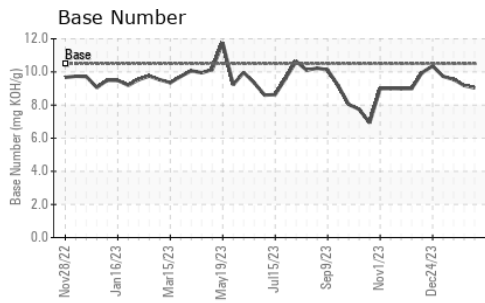

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : MW0061207

**Lab Number** : 06099299

**Unique Number** : 10897529

**Test Package** : MAR 2

**Received** : 23 Feb 2024

**Tested** : 26 Feb 2024

**Diagnosed** : 26 Feb 2024 - Wes Davis

**INGRAM BARGE**

900 S 3RD ST

PADUCAH, KY

US 42003

Contact: ANTHONY VAN CURA

anthony.vancura@ingrambarga.com

T: (270)415-4467

F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)