



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>ABNORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 524L 1DW524LTPMF710019**

Component  
**Transmission**

Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### WEAR

All component wear rates are normal.







### CONTAMINATION

Elemental level of silicon (Si) above normal.

### FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0204342</b>	---	---
Sample Date		Client Info		<b>21 Feb 2024</b>	---	---
Machine Age	hrs	Client Info		<b>7035</b>	---	---
Oil Age	hrs	Client Info		<b>7035</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Not Changd</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---
PQ		ASTM D8184	>100	<b>18</b>	---	---
Iron	ppm	ASTM D5185m	>61	<b>28</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185m	>9	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>100	<b>11</b>	---	---
Tin	ppm	ASTM D5185m	>3	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silicon	ppm	ASTM D5185m	>21	<b>▲ 26</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	---	---
Water		WC Method	>0.075	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	---	---
Sodium	ppm	ASTM D5185m	>30	<b>9</b>	---	---
Boron	ppm	ASTM D5185m		<b>1</b>	---	---
Barium	ppm	ASTM D5185m		<b>6</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>2</b>	---	---
Manganese	ppm	ASTM D5185m		<b>1</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>76</b>	---	---
Calcium	ppm	ASTM D5185m		<b>2713</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>902</b>	---	---
Zinc	ppm	ASTM D5185m		<b>1098</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>3499</b>	---	---
Visc @ 40°C	cSt	ASTM D445		<b>45.9</b>	---	---

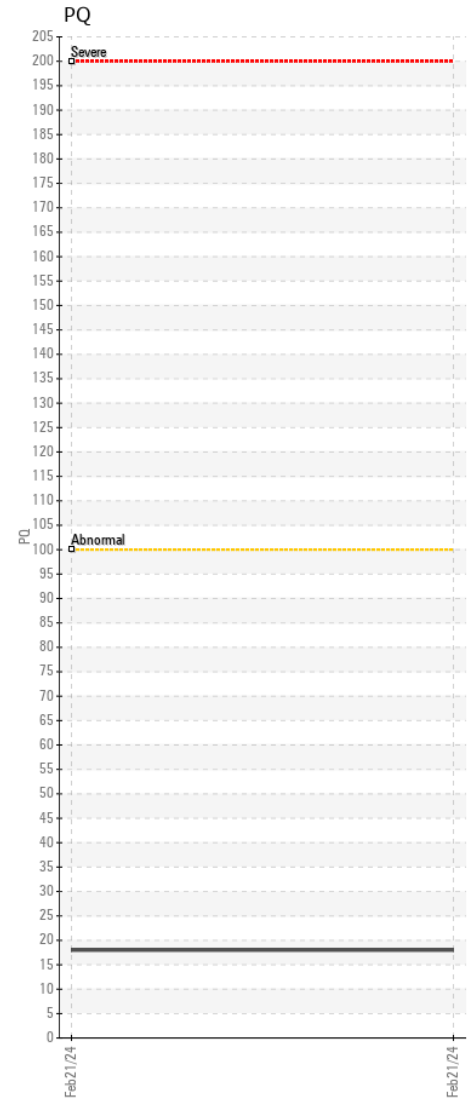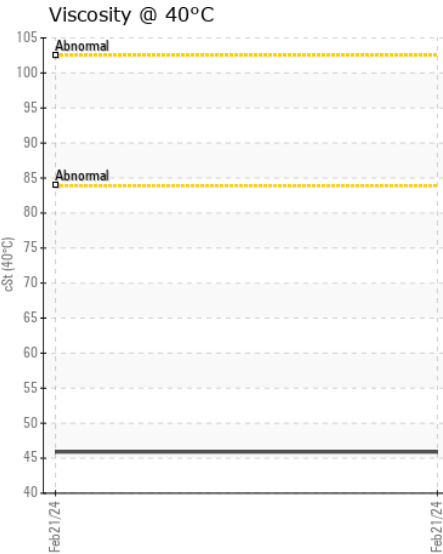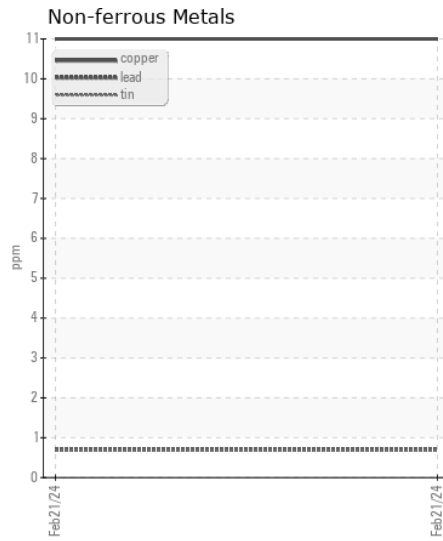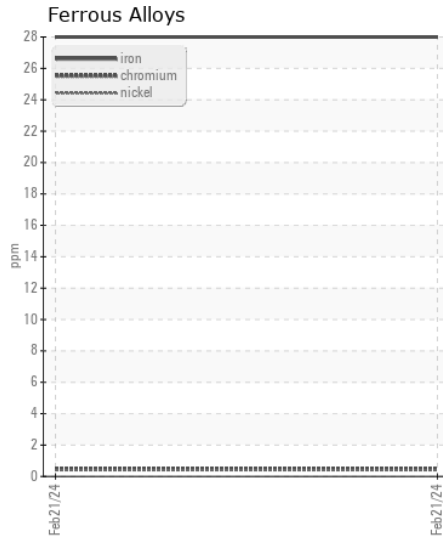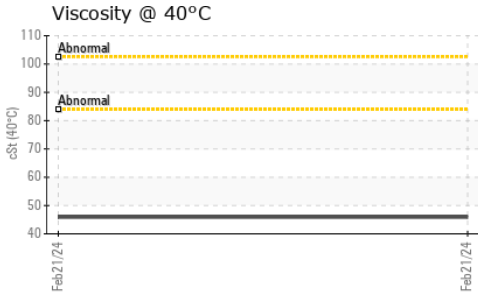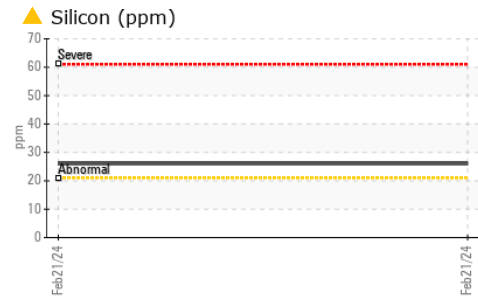

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0204342 **Received** : 23 Feb 2024  
**Lab Number** : 06099325 **Tested** : 26 Feb 2024  
**Unique Number** : 10897555 **Diagnosed** : 27 Feb 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CARLTON'S BACKHOE**  
 9550 STATESVILLE ROAD  
 CHARLOTTE, NC  
 US 28269  
 Contact: LEO

T: (704)547-0211

F: