



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[W64407]
 Machine Id
JOHN DEERE 410E 1DW410EBCNF713870
 Component
Transmission (Auto)
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (20 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: W64407)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0192847	JR0177346	JR0142006
Sample Date		Client Info		21 Feb 2024	28 Aug 2023	30 Mar 2023
Machine Age	hrs	Client Info		2529	1984	1432
Oil Age	hrs	Client Info		2529	1035	0
Filter Age	hrs	Client Info		2529	0	0
Oil Changed		Client Info		Not Changed	Changed	N/A
Filter Changed		Client Info		Not Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	9	18	15
Iron	ppm	ASTM D5185m	>160	16	44	19
Chromium	ppm	ASTM D5185m	>5	<1	0	0
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>5	<1	0	0
Aluminum	ppm	ASTM D5185m	>50	2	1	0
Lead	ppm	ASTM D5185m	>50	1	<1	0
Copper	ppm	ASTM D5185m	>225	8	2	1
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	5	8	6
Potassium	ppm	ASTM D5185m	>20	3	3	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	0	3
Boron	ppm	ASTM D5185m	6	1	125	131
Barium	ppm	ASTM D5185m	0	15	0	0
Molybdenum	ppm	ASTM D5185m	0	<1	0	0
Manganese	ppm	ASTM D5185m		1	<1	<1
Magnesium	ppm	ASTM D5185m	145	90	0	1
Calcium	ppm	ASTM D5185m	3570	3088	125	109
Phosphorus	ppm	ASTM D5185m	1290	982	255	270
Zinc	ppm	ASTM D5185m	1640	1129	20	13
Sulfur	ppm	ASTM D5185m		3727	492	744
Visc @ 40°C	cSt	ASTM D445	57.0	54.7	36.0	37.5

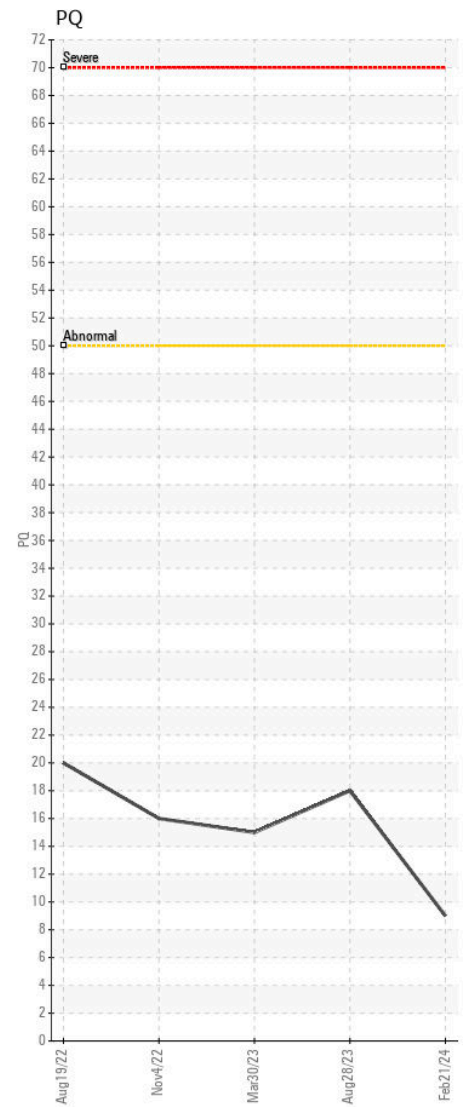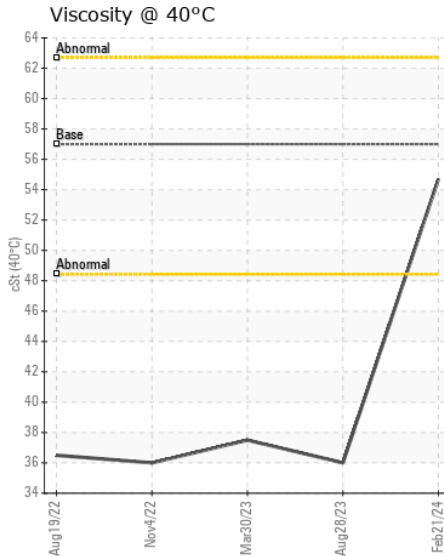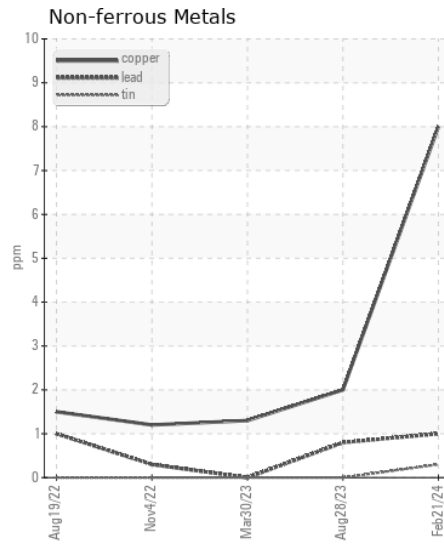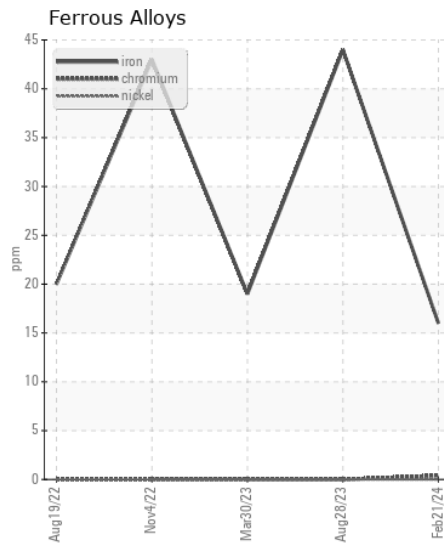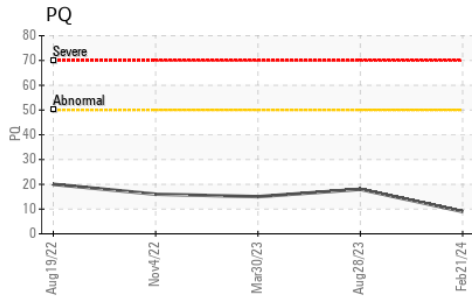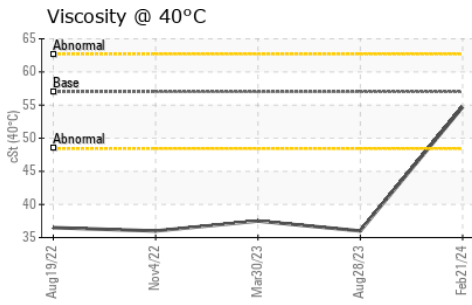

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0192847 **Received** : 23 Feb 2024
Lab Number : 06099353 **Tested** : 26 Feb 2024
Unique Number : 10897583 **Diagnosed** : 27 Feb 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com
 T: (704)597-0211
 F: (704)596-6198

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)