



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**19151**  
Component  
**Diesel Engine**  
Fluid  
**SHELL 15W40 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0841912</b>	WC0343958	---
Sample Date		Client Info		<b>25 Jan 2024</b>	08 May 2019	---
Machine Age	mls	Client Info		<b>8099</b>	53775	---
Oil Age	mls	Client Info		<b>0</b>	25000	---
Filter Age	mls	Client Info		<b>0</b>	25000	---
Oil Changed		Client Info		<b>Changed</b>	N/A	---
Filter Changed		Client Info		<b>Changed</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

## WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	<b>54</b>	10	---
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	<1	---
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m	>20	<b>12</b>	6	---
Lead	ppm	ASTM D5185m	>40	<b>1</b>	0	---
Copper	ppm	ASTM D5185m	>330	<b>55</b>	174	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION







Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>28</b>	6	---
Potassium	ppm	ASTM D5185m	>20	<b>36</b>	2	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.9</b>	9.7	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.2</b>	23	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>150	<b>7</b>	3	---
Boron	ppm	ASTM D5185m		<b>47</b>	17	---
Barium	ppm	ASTM D5185m		<b>6</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>44</b>	39	---
Manganese	ppm	ASTM D5185m		<b>7</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>605</b>	500	---
Calcium	ppm	ASTM D5185m		<b>1719</b>	1651	---
Phosphorus	ppm	ASTM D5185m		<b>835</b>	670	---
Zinc	ppm	ASTM D5185m		<b>1007</b>	844	---
Sulfur	ppm	ASTM D5185m		<b>2666</b>	1748	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>22.4</b>	23	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.2</b>	8.1	---
Visc @ 100°C	cSt	ASTM D445		<b>13.0</b>	13.29	---

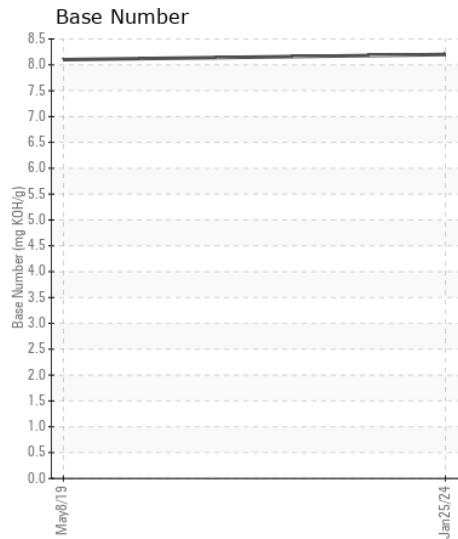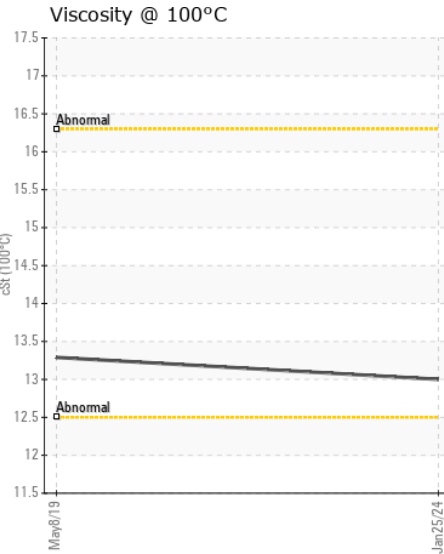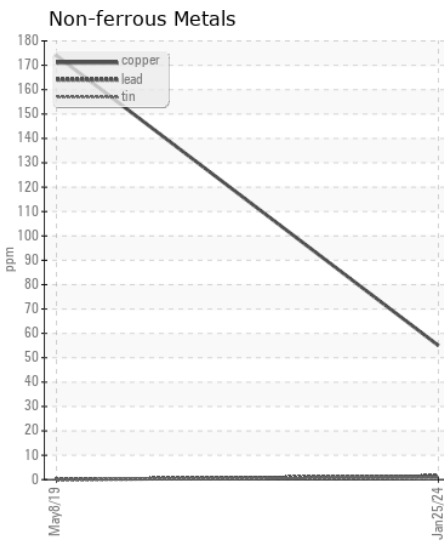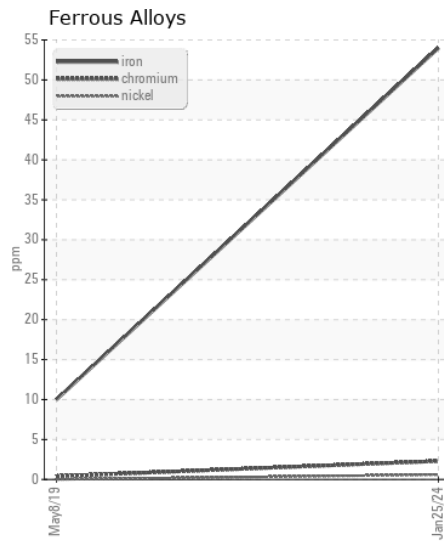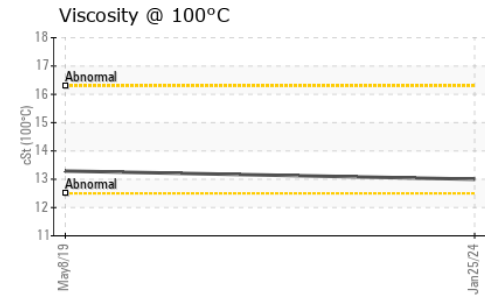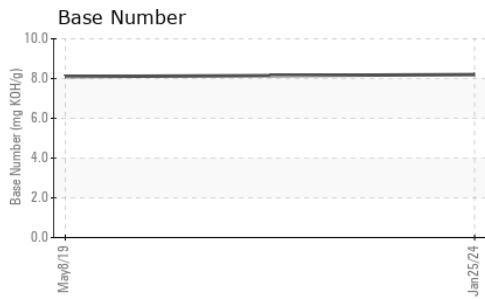

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0841912  
**Lab Number** : 06099653  
**Unique Number** : 10897883  
**Test Package** : FLEET  
**Received** : 26 Feb 2024  
**Tested** : 27 Feb 2024  
**Diagnosed** : 27 Feb 2024 - Wes Davis

**SALEM NATIONALEASE CORPORATION**  
 198 PARK PLAZA DRIVE  
 WINSTON SALEM, NC  
 US 27105  
 Contact: Audrey Hopkins  
 Audrey.Hopkins@salemcorp.com  
 T: (336)767-9642  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)