

Machine Id 18180 Component Diesel Engine DIESEL ENGINE OIL SAE 15W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

Metal levels are typical for a new component breaking in.

CONTAMINATION


FLUID CONDITION

Elevated aluminum (AI) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

The BN result indicates that there is suitable alkalinity remaining in the

oil. The condition of the oil is suitable for further service.

	Test	UOM	Method	Limit/Abn	Current	History1	History2
	Sample Number		Client Info		WC0842041	WC0742265	WC0742236
	Sample Date		Client Info		16 Feb 2024	13 Jul 2023	28 Feb 2023
	Machine Age	mls	Client Info		59541	33282	21545
	Oil Age	mls	Client Info		0	0	0
	Filter Age	mls	Client Info		0	0	0
	Oil Changed		Client Info		Changed	Changed	Changed
	Filter Changed		Client Info		Changed	Changed	Changed
	Sample Status				NORMAL	NORMAL	ATTENTION
	Iron	ppm	ASTM D5185m	>100	25	16	17
	Chromium	ppm	ASTM D5185m	>20	2	1	1
	Nickel	ppm	ASTM D5185m	>4	<1	0	<1
	Titanium	ppm	ASTM D5185m		0	0	0
	Silver	ppm	ASTM D5185m	>3	<1	<1	<1
	Aluminum	ppm	ASTM D5185m	>20	11	7	14
	Lead	ppm	ASTM D5185m	>40	1	0	0
	Copper	ppm	ASTM D5185m	>330	204	13	28
	Tin	ppm	ASTM D5185m	>15	<1	<1	2
	Vanadium	ppm	ASTM D5185m		0	0	0
	White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
	Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
	Silicon	ppm	ASTM D5185m	>25	8	4	4
	Potassium	ppm	ASTM D5185m	>20	25	21	38
	Fuel		WC Method	>5	<1.0	<1.0	0.3
	Water		WC Method	>0.2	NEG	NEG	NEG
	Glycol		WC Method		NEG	NEG	NEG
	Soot %	%	*ASTM D7844	>3	0.8	0.6	0.5
	Nitration	Abs/cm	*ASTM D7624	>20	9.4	7.9	8.1
	Sulfation	Abs/.1mm	*ASTM D7415	>30	21.6	19.4	20.0
	Silt	scalar	*Visual	NONE	NONE	NONE	NONE
	Debris	scalar	*Visual	NONE	NONE	NONE	NONE
	Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
	Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
	Odor	scalar	*Visual	NORML	NORML	NORML	NORML
	Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
	Sodium	nom	ASTM D5185m	>158	2	0	2
	Boron	ppm	ASTM D5185m		4	1	11
	Barium	ppm	ASTM D5185m	10	0	0	0
	Molybdenum	ppm	ASTM D5185m	100	66	61	62
	Manganese	ppm	ASTM D5185m	100	1	<1	1
	Magnesium	ppm	ASTM D5185m	450	1010	919	958
	Calcium	ppm				1131	1268
	Phosphorus	ppm	ASTM D5185m ASTM D5185m	3000	1123	994	1042
	Zinc	ppm		1150	1053 1306		1312
	Sulfur	ppm	ASTM D5185m	1350		1179	
	Oxidation	ppm	ASTM D5185m	4250	2745	2986	3997
		Abs/.1mm	*ASTM D7414	>25	17.7	14.1	14.6
	Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.9	9.1	9.6
	Visc @ 100°C	cSt	ASTM D445	14.4	13.8	13.2	12.4

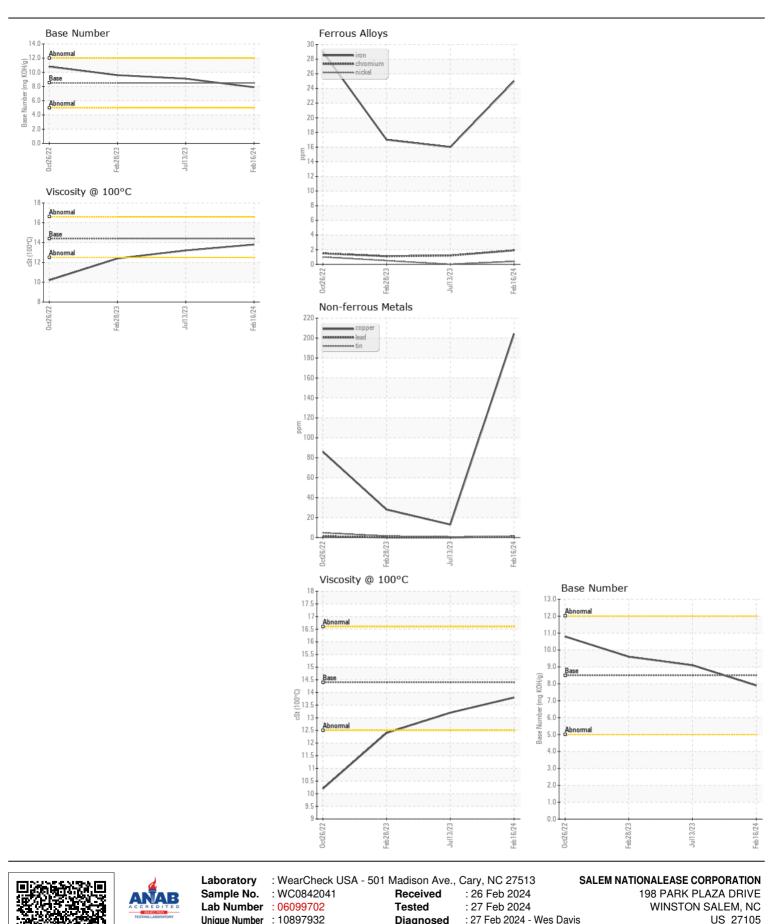

Unique Number : 10897932 : 27 Feb 2024 - Wes Davis Diagnosed Test Package : FLEET **Contact: Audrey Hopkins** Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. Audrey.Hopkins@salemcorp.com * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: (336)767-9642 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: x: