



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
3736
Component
Diesel Engine
Fluid
MOBIL DELVAC 1300 SUPER15W40 (10 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0110811	GFL0073223	GFL0073220
Sample Date		Client Info		21 Feb 2024	16 Nov 2023	23 Oct 2023
Machine Age	hrs	Client Info		17418	16868	16763
Oil Age	hrs	Client Info		600	650	650
Filter Age	hrs	Client Info		600	650	650
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	10	2	10
Chromium	ppm	ASTM D5185m	>20	<1	<1	0
Nickel	ppm	ASTM D5185m	>5	<1	0	<1
Titanium	ppm	ASTM D5185m	>2	<1	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>20	5	2	6
Lead	ppm	ASTM D5185m	>40	2	0	1
Copper	ppm	ASTM D5185m	>330	3	<1	1
Tin	ppm	ASTM D5185m	>15	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	13	5	10
Potassium	ppm	ASTM D5185m	>20	2	<1	2
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>4	0.3	0.1	0.4
Nitration	Abs/cm	*ASTM D7624	>20	8.4	5.5	8.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.1	20.9	23.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		9	2	8
Boron	ppm	ASTM D5185m	0	163	447	205
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	59	80	74
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m	0	228	379	346
Calcium	ppm	ASTM D5185m		1586	1408	1334
Phosphorus	ppm	ASTM D5185m		909	1064	869
Zinc	ppm	ASTM D5185m		1113	1293	1173
Sulfur	ppm	ASTM D5185m		2704	3305	2509
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.5	14.7	19.1
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	4.5	7.8	5.1
Visc @ 100°C	cSt	ASTM D445	14	13.0	13.9	12.6

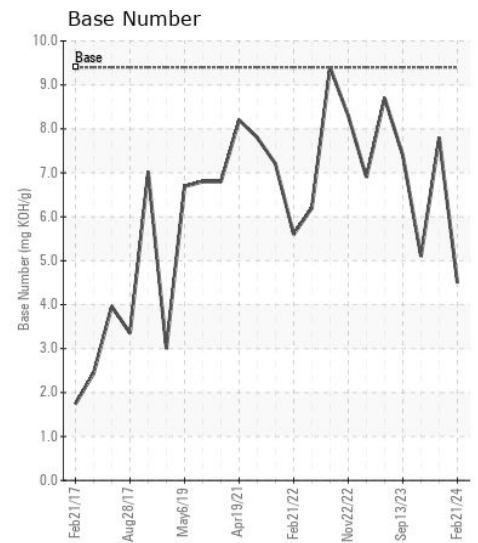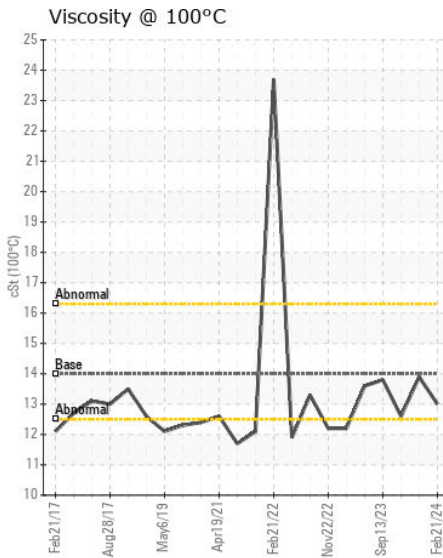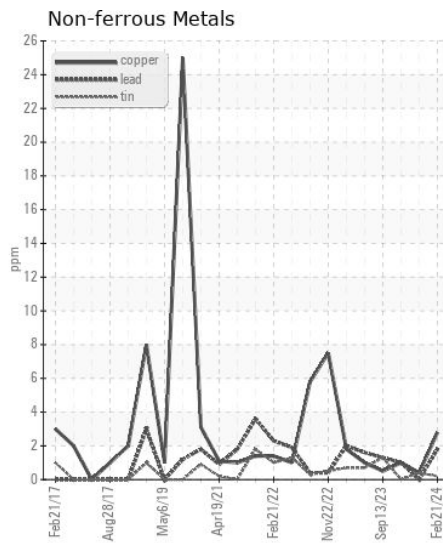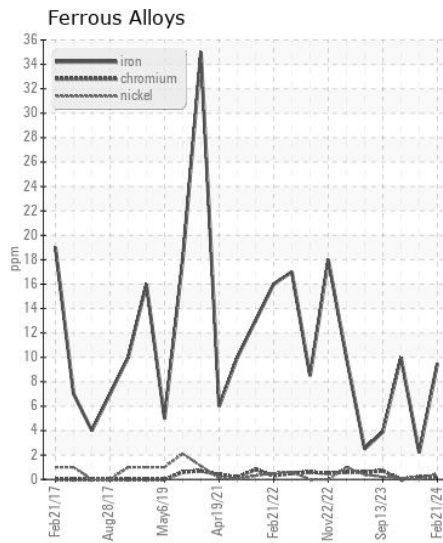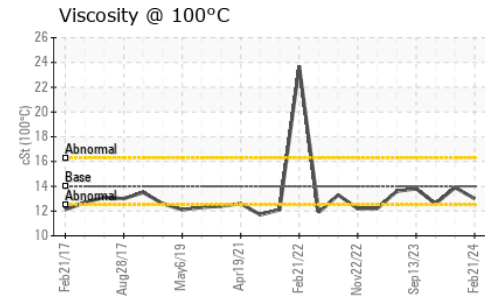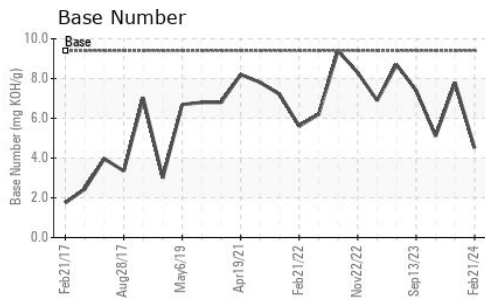

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0110811
Lab Number : 06099842
Unique Number : 10898072
Test Package : FLEET

Received : 26 Feb 2024
Tested : 27 Feb 2024
Diagnosed : 27 Feb 2024 - Don Baldrige

GFL Environmental - 146 - Augusta
 1064 Franke Industrial
 Augusta, GA
 US 30909
 Contact: JEFFERY WASHINGTON
 jeff.washington@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: