



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
DT741
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 10W30 (36 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0113195	PCA0096925	PCA0091229
Sample Date		Client Info		20 Feb 2024	20 Jul 2023	14 Feb 2023
Machine Age	mls	Client Info		181237	152808	126570
Oil Age	mls	Client Info		28429	26238	24435
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	25	26	19
Chromium	ppm	ASTM D5185m	>20	2	1	<1
Nickel	ppm	ASTM D5185m	>5	3	<1	<1
Titanium	ppm	ASTM D5185m	>2	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>20	6	5	4
Lead	ppm	ASTM D5185m	>40	1	<1	<1
Copper	ppm	ASTM D5185m	>330	3	3	4
Tin	ppm	ASTM D5185m	>15	1	1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	8	7	6
Potassium	ppm	ASTM D5185m	>20	8	7	8
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>4	0.7	0.7	0.6
Nitration	Abs/cm	*ASTM D7624	>20	10.4	10.7	10.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.3	24.1	22.6
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		7	7	3
Boron	ppm	ASTM D5185m	2	1	3	<1
Barium	ppm	ASTM D5185m	0	34	<1	0
Molybdenum	ppm	ASTM D5185m	50	60	66	64
Manganese	ppm	ASTM D5185m	0	1	<1	<1
Magnesium	ppm	ASTM D5185m	950	862	957	913
Calcium	ppm	ASTM D5185m	1050	989	1317	1112
Phosphorus	ppm	ASTM D5185m	995	913	1088	994
Zinc	ppm	ASTM D5185m	1180	1163	1372	1244
Sulfur	ppm	ASTM D5185m	2600	2614	3243	2475
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.4	20.2	18.5
Base Number (BN)	mg KOH/g	ASTM D2896		4.2	4.6	5.1
Visc @ 100°C	cSt	ASTM D445	12.00	11.1	11.2	11.3

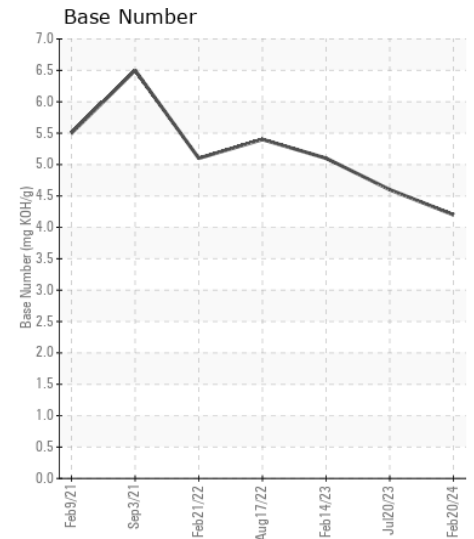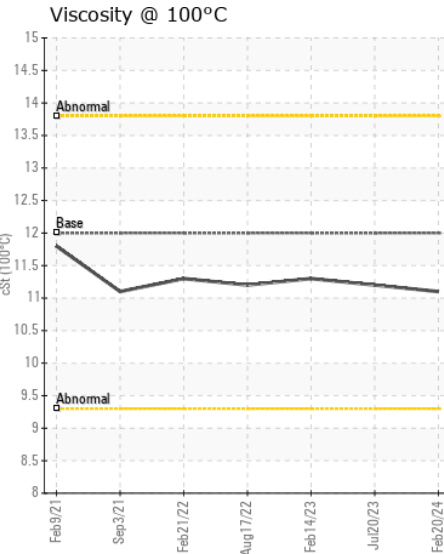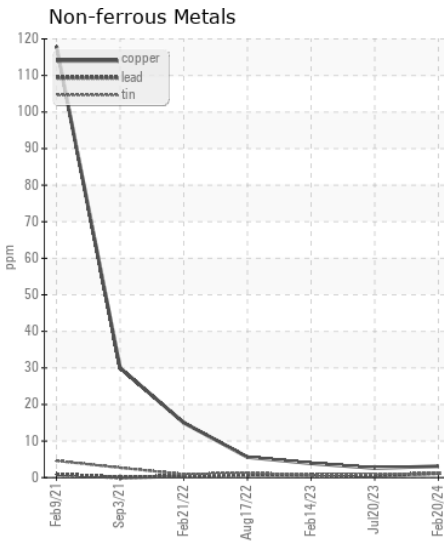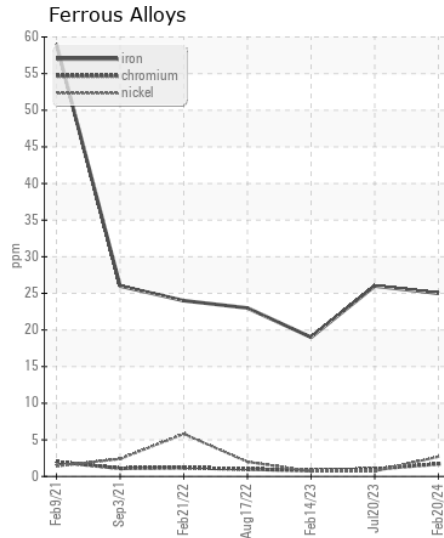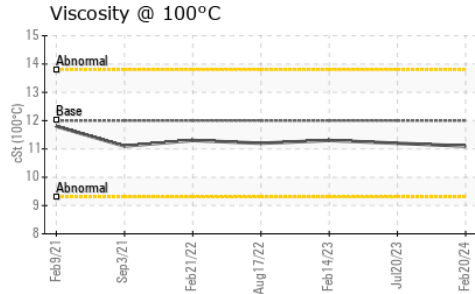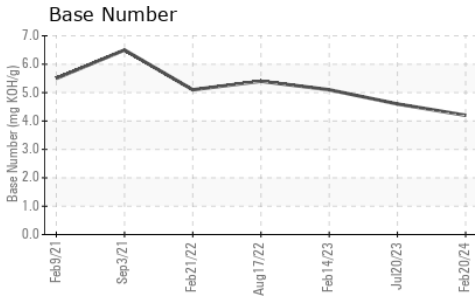

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0113195
Lab Number : 06099887
Unique Number : 10898117
Test Package : FLEET

Received : 26 Feb 2024
Tested : 27 Feb 2024
Diagnosed : 27 Feb 2024 - Wes Davis

NW WHITE & CO - ANDERSON DIVISION
 2605 RIVER RD
 PIEDMONT, SC
 US 29673
 Contact: James Threatt
 jthreatt@nwwhite.com
 T: (864)918-4646
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)