



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**CARDINAL PRIDE**

Machine Id  
**CPR**

Component  
**Starboard Genset**

Fluid  
**CHEVRON DELO 710 LS (3 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0065120</b>	MW0065144	MW0060999
Sample Date		Client Info		<b>19 Feb 2024</b>	29 Dec 2023	14 Nov 2023
Machine Age	hrs	Client Info		<b>10225</b>	9626	9131
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	<b>11</b>	7	4
Chromium	ppm	ASTM D5185m	>4	<b>1</b>	<1	0
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>12	<b>4</b>	2	2
Lead	ppm	ASTM D5185m	>17	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>70	<b>&lt;1</b>	0	0
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>4</b>	2	3
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	0
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.1</b>	7.6	7.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>14.8</b>	14.4	14.0
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	0	2
Boron	ppm	ASTM D5185m		<b>41</b>	45	41
Barium	ppm	ASTM D5185m		<b>34</b>	3	0
Molybdenum	ppm	ASTM D5185m		<b>48</b>	44	43
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m		<b>8</b>	7	22
Calcium	ppm	ASTM D5185m		<b>3218</b>	3259	3313
Phosphorus	ppm	ASTM D5185m		<b>37</b>	46	17
Zinc	ppm	ASTM D5185m		<b>28</b>	0	23
Sulfur	ppm	ASTM D5185m		<b>2355</b>	2331	2075
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>9.2</b>	8.4	8.1
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	<b>5.9</b>	6.2	6.3
Visc @ 100°C	cSt	ASTM D445	15.5	<b>14.4</b>	14.3	14.2

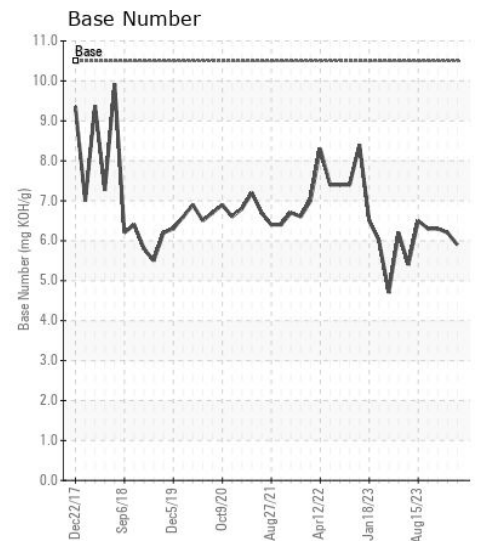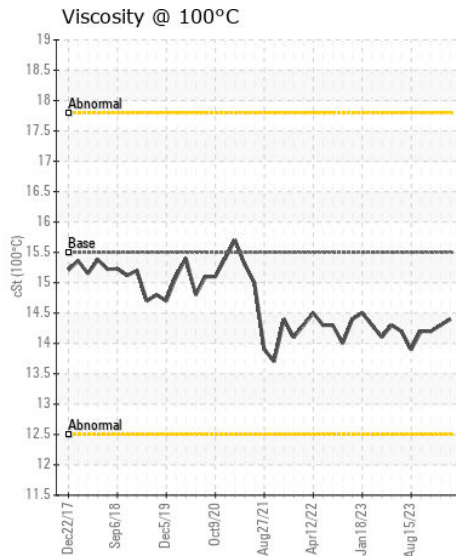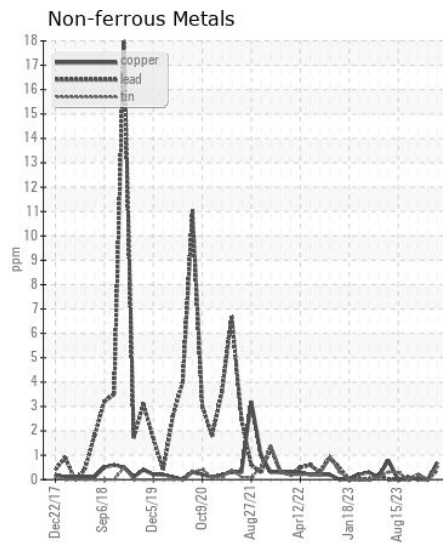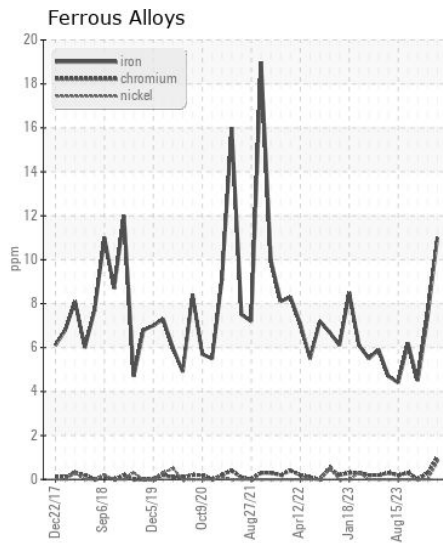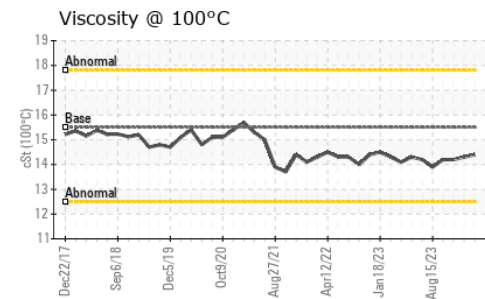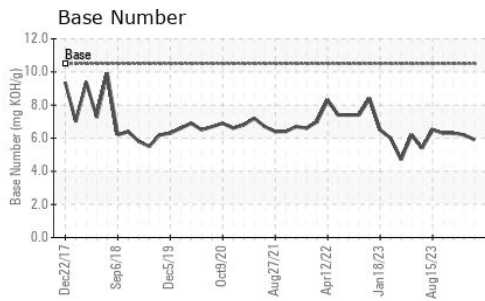

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0065120  
**Lab Number** : 06099892  
**Unique Number** : 10898122  
**Test Package** : MAR 2

**Received** : 26 Feb 2024  
**Tested** : 27 Feb 2024  
**Diagnosed** : 27 Feb 2024 - Wes Davis

**AMERICAN RIVER TRANSPORTATION CO.**  
 P.O. BOX 2889  
 ST. LOUIS, MO  
 US 63111  
 Contact: BRIAN GRIEWING  
 brian.griewing@adm.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (314)481-5278