



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
8311686
 Component
Diesel Engine
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL0034866	IL06024999	IL05934010
Sample Date		Client Info		13 Feb 2024	24 Nov 2023	04 Aug 2023
Machine Age	mls	Client Info		79630	72113	53673
Oil Age	mls	Client Info		0	40000	40000
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	39	27	117
Chromium	ppm	ASTM D5185m	>20	4	2	6
Nickel	ppm	ASTM D5185m	>4	2	<1	1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	<1	<1
Aluminum	ppm	ASTM D5185m	>20	8	5	21
Lead	ppm	ASTM D5185m	>40	3	2	13
Copper	ppm	ASTM D5185m	>330	4	4	25
Tin	ppm	ASTM D5185m	>15	2	<1	6
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	14	13	47
Potassium	ppm	ASTM D5185m	>20	17	14	58
Fuel	%	ASTM D3524	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.3	0.6
Nitration	Abs/cm	*ASTM D7624	>20	10.5	9.2	17.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.4	22.0	31.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	<1	6
Boron	ppm	ASTM D5185m		23	40	20
Barium	ppm	ASTM D5185m		34	0	6
Molybdenum	ppm	ASTM D5185m		44	67	67
Manganese	ppm	ASTM D5185m		2	<1	6
Magnesium	ppm	ASTM D5185m		451	511	481
Calcium	ppm	ASTM D5185m		1449	2136	1890
Phosphorus	ppm	ASTM D5185m		664	1032	971
Zinc	ppm	ASTM D5185m		866	1167	1305
Sulfur	ppm	ASTM D5185m		2161	2899	3019
Oxidation	Abs/.1mm	*ASTM D7414	>25	25.0	21.3	37.5
Base Number (BN)	mg KOH/g	ASTM D2896		6.8	8.1	▲ 1.7
Visc @ 100°C	cSt	ASTM D445		11.4	11.3	12.9

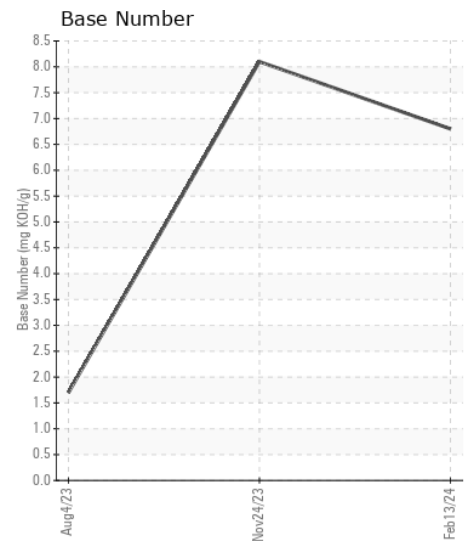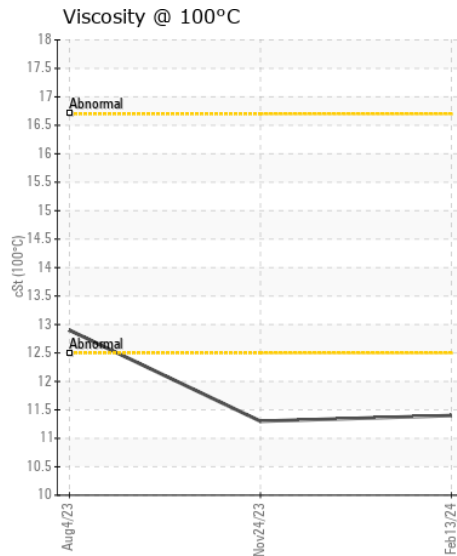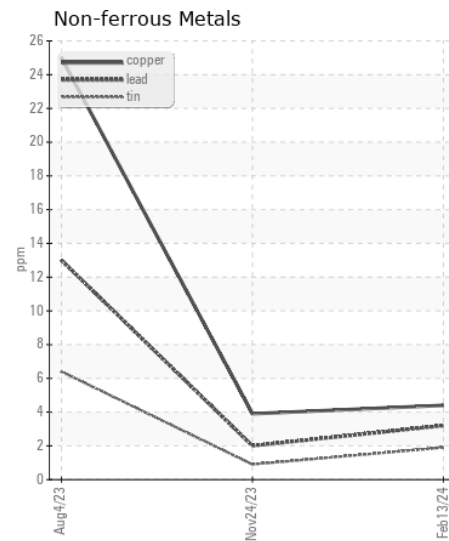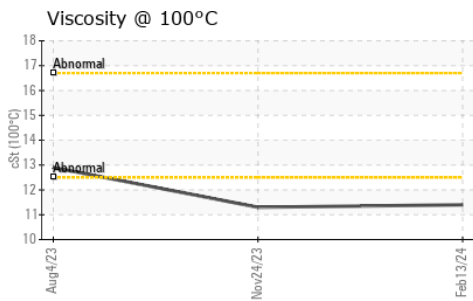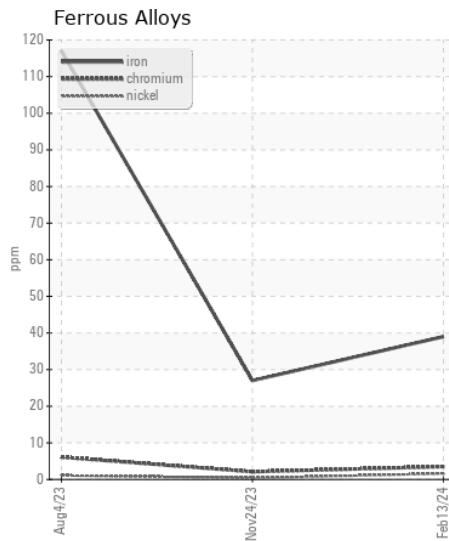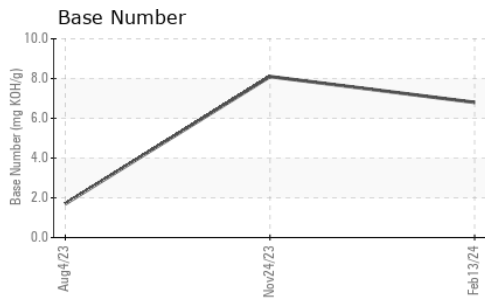

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL0034866 **Received** : 26 Feb 2024
Lab Number : 06099913 **Tested** : 27 Feb 2024
Unique Number : 10898143 **Diagnosed** : 27 Feb 2024 - Don Baldrige
Test Package : FLEET (Additional Tests: FuelDilution)

IDEALEASE OF ATLANTA - FULTON
 4675 BAKERS FERRY ROAD
 ATLANTA, GA
 US 30331
 Contact: DAVID JOHNS
 davidjohns@idealease.com
 T: (404)699-5571
 F: (404)699-7420

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)