



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**VOLVO A40G 352341**  
Component  
**Diesel Engine**  
Fluid  
**MOBIL 15W40 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP416805</b>	VCP331583	VCP339712
Sample Date		Client Info		<b>13 Feb 2024</b>	11 Dec 2023	07 Nov 2023
Machine Age	hrs	Client Info		<b>7384</b>	7087	6865
Oil Age	hrs	Client Info		<b>297</b>	222	259
Filter Age	hrs	Client Info		<b>0</b>	222	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	<b>5</b>	3	2
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>4</b>	4	4
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>7</b>	6	6
Potassium	ppm	ASTM D5185m	>20	<b>12</b>	18	2
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	%	*ASTM D2982		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.6</b>	8.1	8.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.5</b>	18.0	18.4
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>118	<b>16</b>	25	5
Boron	ppm	ASTM D5185m		<b>65</b>	113	105
Barium	ppm	ASTM D5185m		<b>34</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>81</b>	121	118
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m		<b>506</b>	642	700
Calcium	ppm	ASTM D5185m		<b>1239</b>	1219	1329
Phosphorus	ppm	ASTM D5185m		<b>627</b>	771	699
Zinc	ppm	ASTM D5185m		<b>786</b>	833	930
Sulfur	ppm	ASTM D5185m		<b>2838</b>	3619	3328
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.0</b>	14.7	15.2
Base Number (BN)	mg KOH/g	ASTM D2896		<b>7.9</b>	6.9	7.1
Visc @ 100°C	cSt	ASTM D445		<b>12.7</b>	12.8	12.9

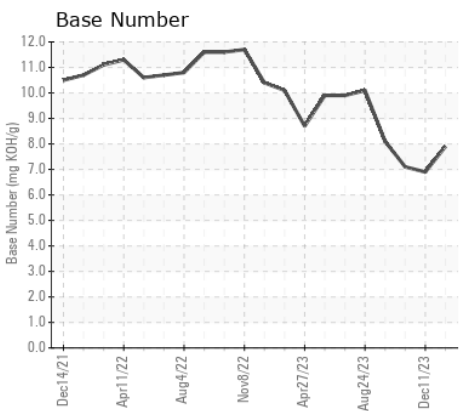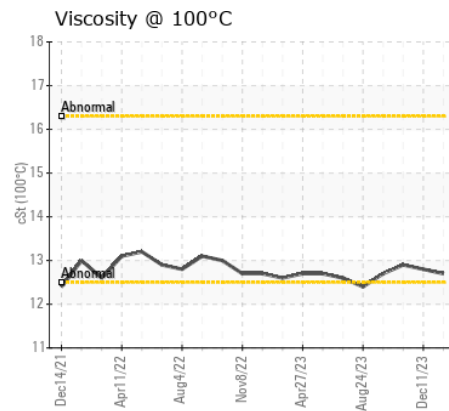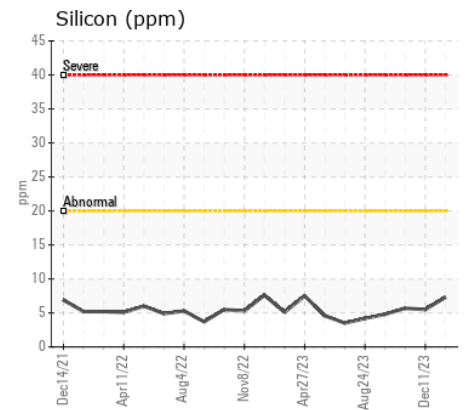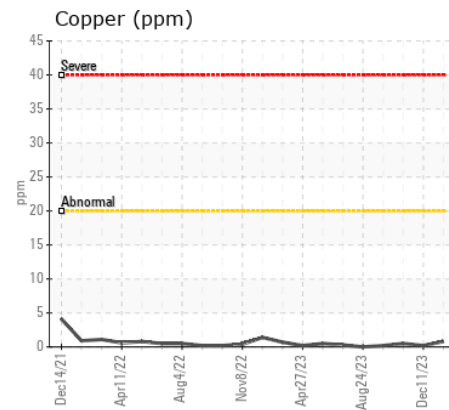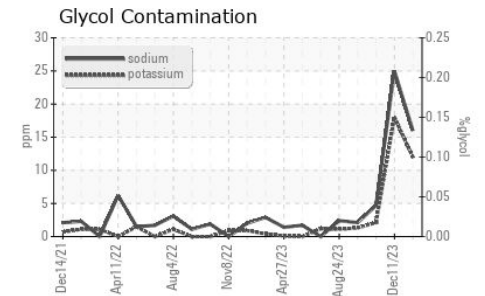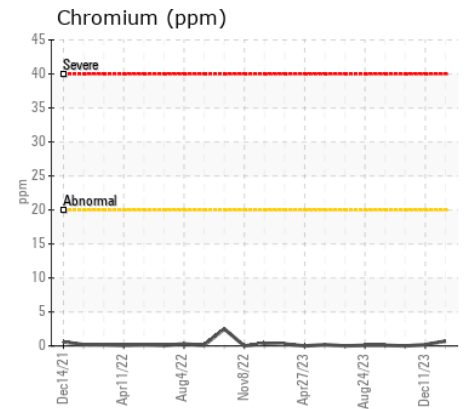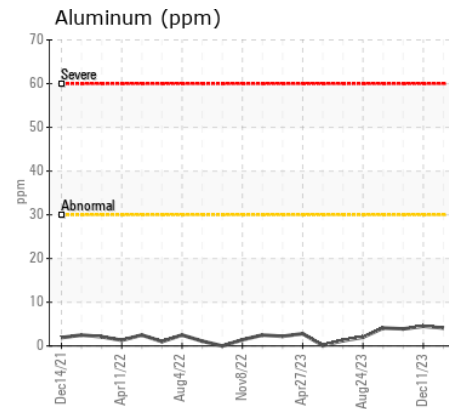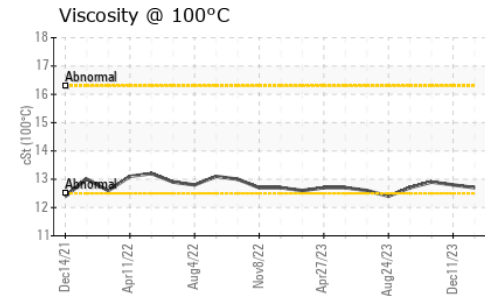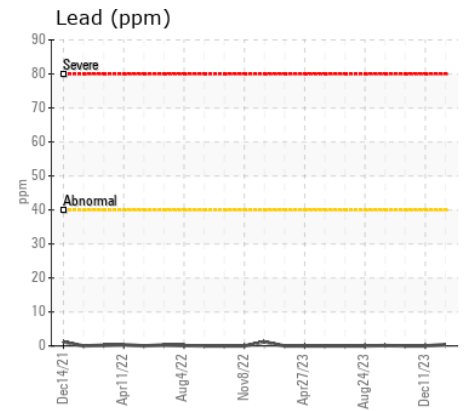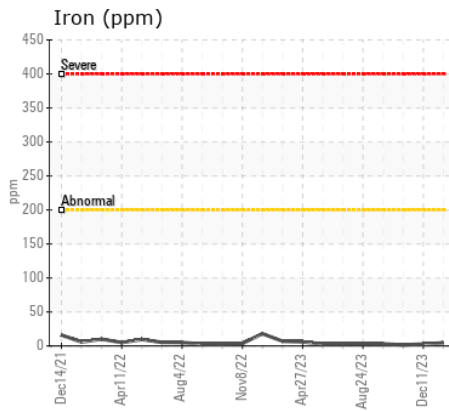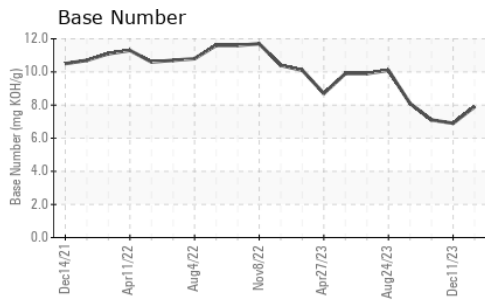

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP416805 **Received** : 26 Feb 2024  
**Lab Number** : 06099949 **Tested** : 27 Feb 2024  
**Unique Number** : 10898179 **Diagnosed** : 27 Feb 2024 - Don Baldrige  
**Test Package** : MOB 1 ( Additional Tests: Glycol, TBN )

**SCHILDBERG CONSTRUCTION COMPANY**  
 PO BOX 358  
 GREENFIELD, IA  
 US 50849  
 Contact: SCOTT ARMSTRONG  
 sarmstrong@schildberg.com  
 T: (641)743-8237  
 F: (641)743-2486

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)