



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Area  
**Store 4 - Fairmont**  
Machine Id  
**JOHN DEERE 135G 1FF135GXHNF503775**  
Component  
**Diesel Engine**  
Fluid  
**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (5 GAL)**

## RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0047825	---	---
Sample Date		Client Info		20 Feb 2024	---	---
Machine Age	hrs	Client Info		598	---	---
Oil Age	hrs	Client Info		598	---	---
Filter Age	hrs	Client Info		598	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ATTENTION	---	---

## WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>51	7	---	---
Chromium	ppm	ASTM D5185m	>11	<1	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>31	2	---	---
Lead	ppm	ASTM D5185m	>26	0	---	---
Copper	ppm	ASTM D5185m	>26	34	---	---
Tin	ppm	ASTM D5185m	>4	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION








Fuel content negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>120	8	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Fuel	%	ASTM D3524	>2.1	1.6	---	---
Water		WC Method	>0.21	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	7.3	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.3	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---	---

## FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m	>31	0	---	---
Boron	ppm	ASTM D5185m		75	---	---
Barium	ppm	ASTM D5185m		9	---	---
Molybdenum	ppm	ASTM D5185m		8	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		92	---	---
Calcium	ppm	ASTM D5185m		1027	---	---
Phosphorus	ppm	ASTM D5185m		559	---	---
Zinc	ppm	ASTM D5185m		633	---	---
Sulfur	ppm	ASTM D5185m		1477	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	11.4	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	7.2	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	11.7	---	---

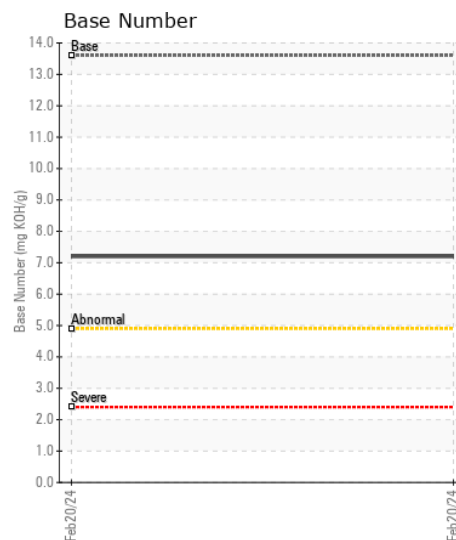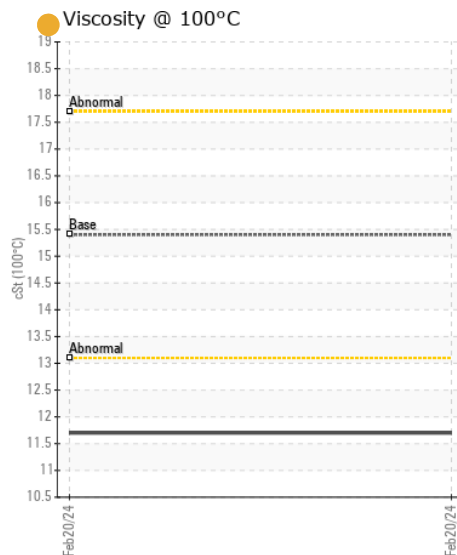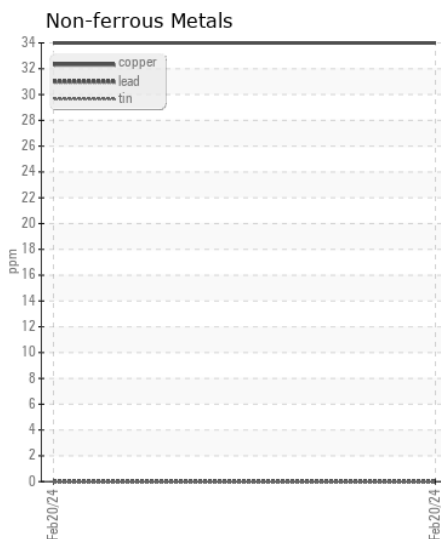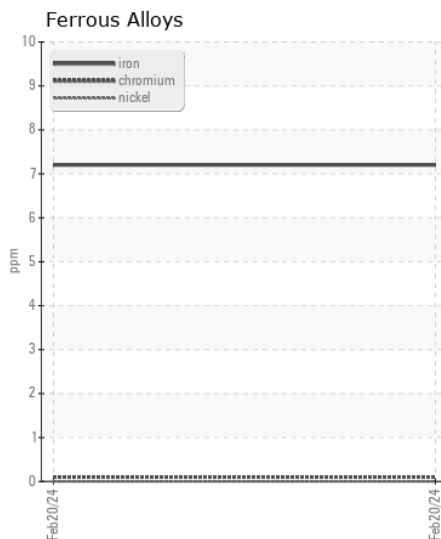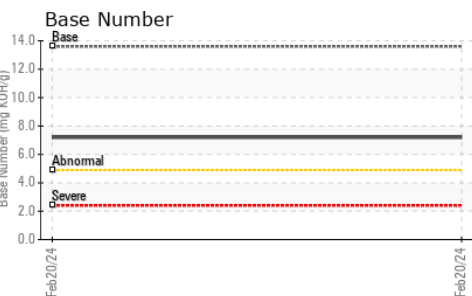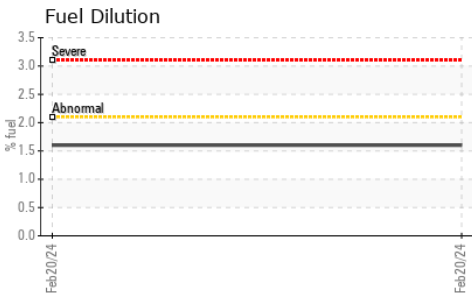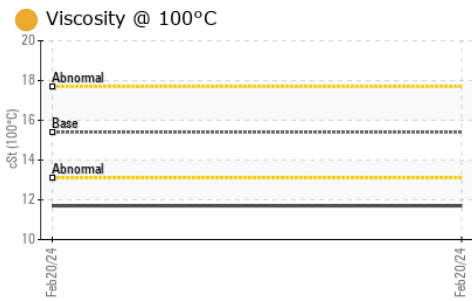

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0047825 **Received** : 26 Feb 2024  
**Lab Number** : 06099980 **Tested** : 28 Feb 2024  
**Unique Number** : 10898210 **Diagnosed** : 28 Feb 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: FuelDilution, PercentFuel, TBN )

**LESLIE EQUIPMENT COMPANY**  
 105 TENNIS CENTER DR.  
 MARIETTA, OH  
 US 45750-9765  
 Contact: LEANNE KENDALL  
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (740)373-5570