



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Area
WQ
Machine Id
DODGE 00222
Component
Gearbox
Fluid
GEAR OIL ISO 220 (2 GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.











CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The oil viscosity is lower than normal. Confirm oil type. The AN level is acceptable for this fluid.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0721335	WC0570398	WC0524333
Sample Date		Client Info		25 Feb 2024	17 Jan 2023	07 Feb 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ATTENTION	NORMAL	NORMAL
Iron	ppm	ASTM D5185m	>200	31	51	40
Chromium	ppm	ASTM D5185m	>15	0	0	<1
Nickel	ppm	ASTM D5185m	>15	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	6	2	1
Lead	ppm	ASTM D5185m	>100	<1	<1	0
Copper	ppm	ASTM D5185m	>200	<1	<1	0
Tin	ppm	ASTM D5185m	>25	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	MODER	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185m	>50	21	14	15
Potassium	ppm	ASTM D5185m	>20	4	2	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Sodium	ppm	ASTM D5185m		2	<1	<1
Boron	ppm	ASTM D5185m	50	7	21	5
Barium	ppm	ASTM D5185m	15	0	0	0
Molybdenum	ppm	ASTM D5185m	15	<1	<1	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	50	3	3	<1
Calcium	ppm	ASTM D5185m	50	9	24	3
Phosphorus	ppm	ASTM D5185m	350	216	223	158
Zinc	ppm	ASTM D5185m	100	6	14	9
Sulfur	ppm	ASTM D5185m	12500	9133	6256	14584
Acid Number (AN)	mg KOH/g	ASTM D8045	0.85	0.53	0.62	0.43
Visc @ 40°C	cSt	ASTM D445	220	150.6	199	204

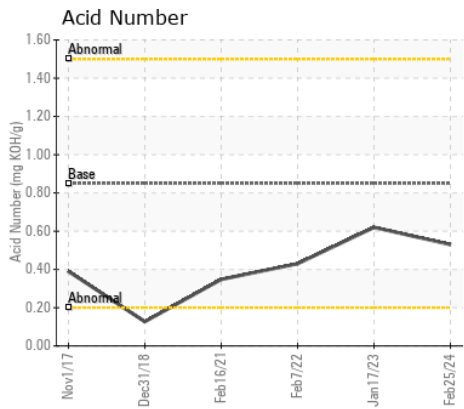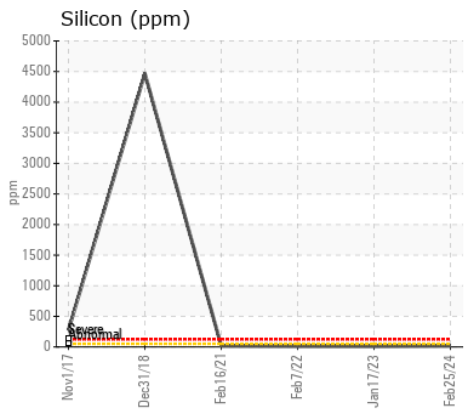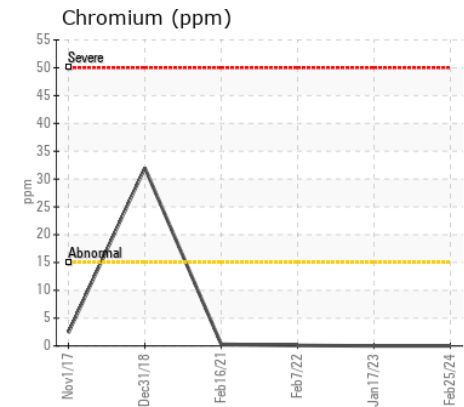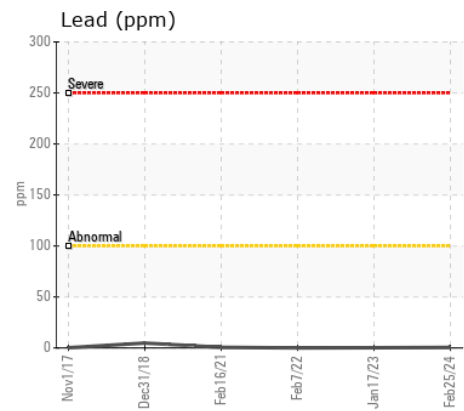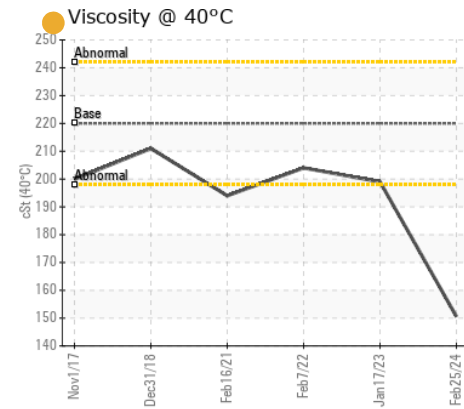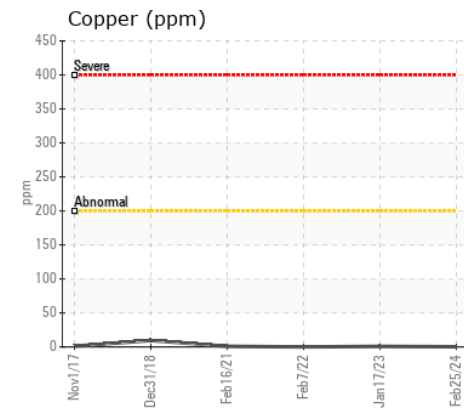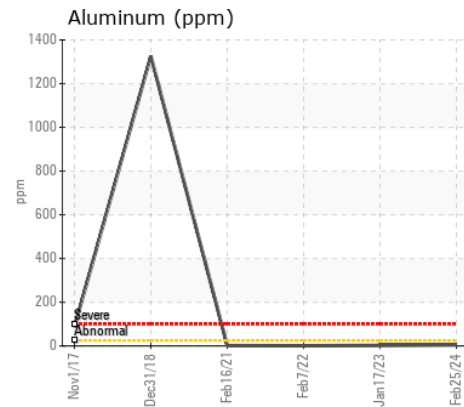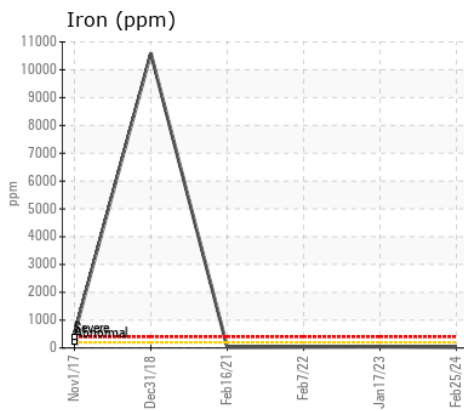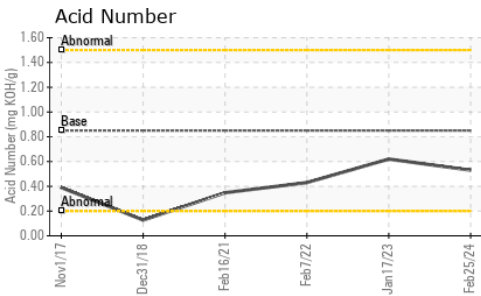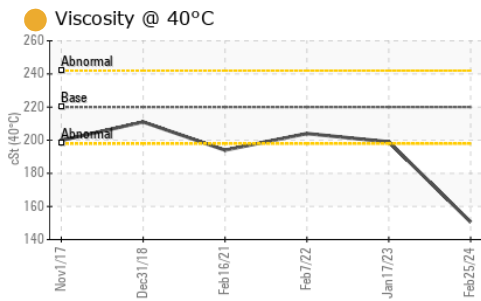

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0721335

Lab Number : 06100259

Unique Number : 10898489

Test Package : MOB 2

Received : 26 Feb 2024

Tested : 01 Mar 2024

Diagnosed : 01 Mar 2024 - Jonathan Hester

S.M. LORUSSO & SONS

221 NORFOLK ST.

WALPOLE, MA

US 02081

Contact: PAUL BECKMAN

pbeckman@smlorusso.com

T: (508)668-2603

F: (508)660-0232

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)